



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 December 2001 (06.12.2001)

PCT

(10) International Publication Number
WO 01/92732 A1

(51) International Patent Classification⁷: **F15B 15/26**

(21) International Application Number: PCT/AU01/00446

(22) International Filing Date: 19 April 2001 (19.04.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PQ 7867 31 May 2000 (31.05.2000) AU

(71) Applicant (for all designated States except US): **RA-ZORBACK VEHICLES CORPORATION LIMITED**
[AU/AU]; Suite 15, 201 New South Head Road, Edgecliff,
NSW 2027 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KENDALL, Jeffrey**
[AU/AU]; 30 Gordon Street, Ararat, VIC 3377 (AU).

(74) Agent: **SPRUSON & FERGUSON**; GPO Box 3898, Sydney,
NSW 2001 (AU).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A HYDRAULIC OR PNEUMATIC CYLINDER

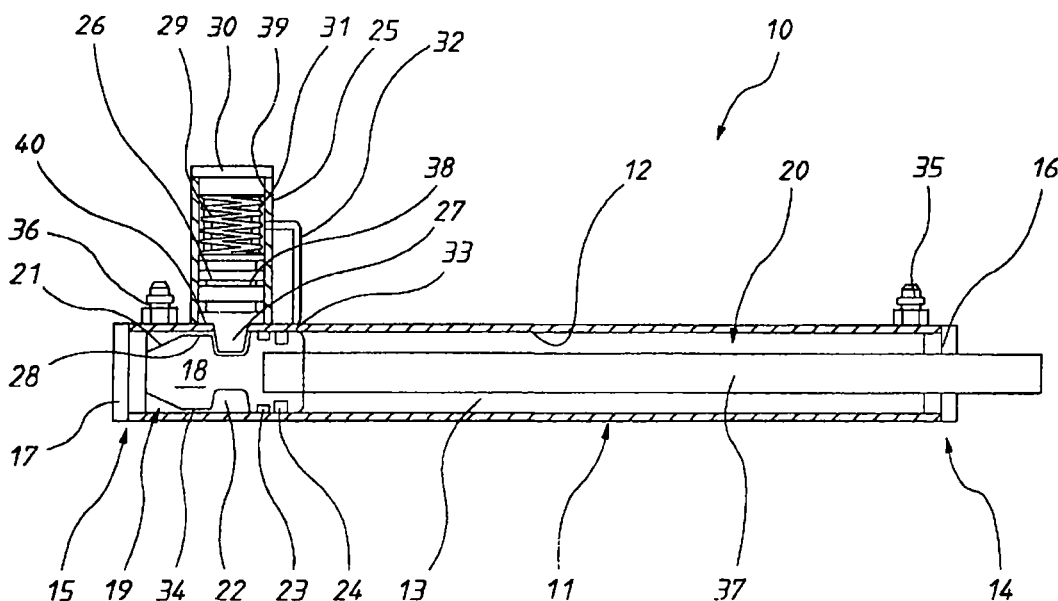

(57) Abstract: A pneumatic or hydraulic cylinder (10) having a bore (12) cooperating with a piston (18). Extending from the piston (18) is a piston rod (37). There is further provided a pawl (26) which is engageable with the piston (18) to retain the piston (18) at a desired location. The pawl (26) is moved from engagement with the piston (18) upon fluid under pressure being delivered to one end of the cylinder (10).

WO 01/92732 A1

