



(43) International Publication Date
21 August 2014 (21.08.2014)

(51) International Patent Classification:
E04G 11/48 (2006.01)

(21) International Application Number:
PCT/EP2013/053170

(22) International Filing Date:
18 February 2013 (18.02.2013)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: DOKA INDUSTRIE GMBH [AT/AT]; Josef-
Umdasch-Platz 1, A-3300 Amstetten (AT).

(74) Agents: WIEDEMANN, Peter et al.; (HOFFMANN ·
EITL), Arabellastrasse 4, 81925 Munich (DE).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: STRIPPING HEAD AND FORMWORK SYSTEM

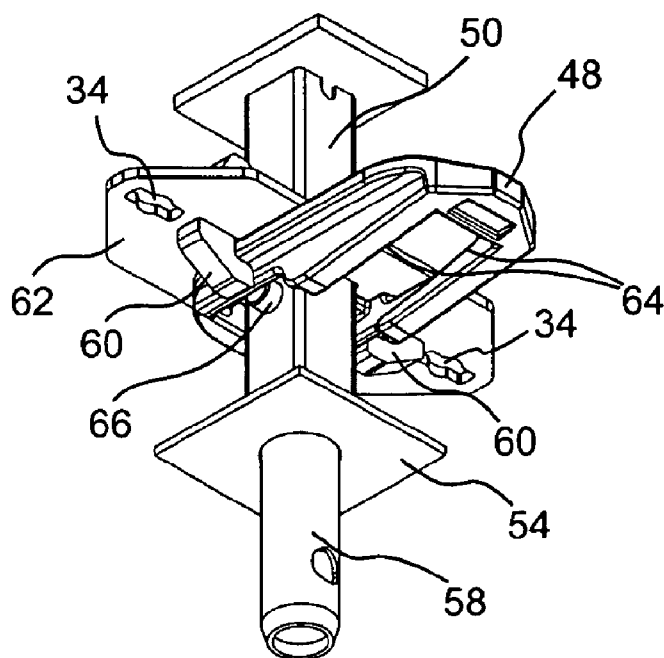


Fig. 6

(57) Abstract: The invention relates to a stripping head, connected or connectable with, at its lower end, with a prop, and connectable with, at its upper part with at least one beam and/or panel, having a wedge, which is at least indirectly positively engagable with the beam and/or the panel and with a fixed portion (66) of the stripping head such that displacement of the wedge (48) in horizontal direction urges the beam and/or the panel vertically downwards. A formwork system has at least one such stripping head and at least one of, preferably a plurality of panels and beams.