



- (51) **International Patent Classification:**
B65D 50/14 (2006.01) **B65D 55/14** (2006.01)
B65D 55/02 (2006.01)
- (21) **International Application Number:**
PCT/US2015/042667
- (22) **International Filing Date:**
29 July 2015 (29.07.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/030,195 29 July 2014 (29.07.2014) US
14/812,501 29 July 2015 (29.07.2015) US
- (71) **Applicant:** TRI STATE DISTRIBUTION, INC.
[US/US]; 600 Vista Dr., Sparta, TN 38583 (US).
- (72) **Inventors:** MICELI, David, A.; 12965 Silver Wolf Road,
Reno, NV 89511 (US). MICELI, Joseph, A.; 2194 Phifer
Mine Road, Spencer, TN 38585 (US).
- (74) **Agents:** ORR, Wade, R. et al.; Luedeka Neely Group,
P.C., P.O. Box 1871, Knoxville, TN 37901 (US).


(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CHILD PROOF CLOSURE

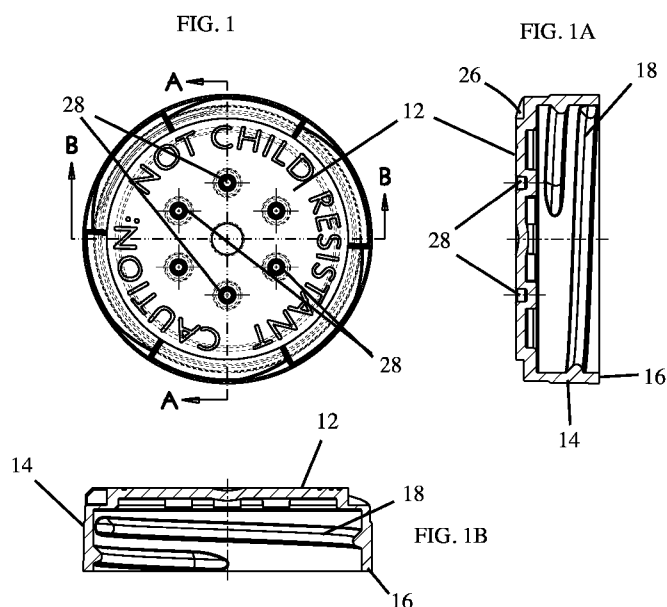

(57) **Abstract:** A child proof closure including an outer cap having a set of spaced apart apertures extending through a top surface of the outer cap, an inner cap dimensioned and configured to be assembled within the outer cap having a set of spaced apart receivers corresponding to the at least one set of spaced apart apertures of the outer cap, and a key having a set of spaced apart projections dimensioned and configured to be inserted through the spaced apart apertures of the outer cap to engage the spaced apart receivers of the inner cap when the spaced apart apertures of the outer cap are vertically aligned with the spaced apart receivers of the inner cap for unscrewing the assembled closure from the container by turning the key.