



- (51) International Patent Classification:
A44B 1/00 (2006.01) A41F 1/02 (2006.01)
- (21) International Application Number:
PCT/EP2014/056733
- (22) International Filing Date:
3 April 2014 (03.04.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13168005.0 16 May 2013 (16.05.2013) EP
- (72) Inventor; and
- (71) Applicant : MAUSSEN, Joseph Franciscus August Alfred [NL/ES]; C/Nanclares de Oca 14, DR, 3D, E-28022 Madrid (ES).
- (74) Agent: LUTEN, Martin Haaije; Arnold + Siedsma B.V., P.O. Box 18558, NL-2502 EN The Hague (NL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (54) Title: BUTTON FOR FASTENING FABRICS

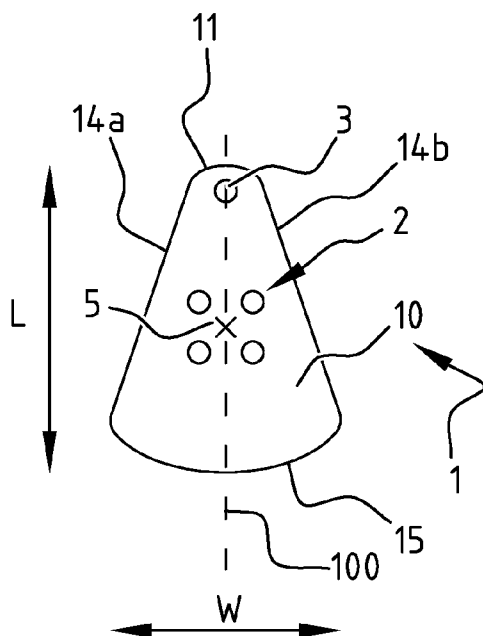


FIG. 1

(57) Abstract: Button (1) for fastening fabrics, for instance clothing, wherein the button (1) comprises a body (10) and is provided with attachment means (2) at a central location (5) of the body (10), arranged for attaching, for instance by sewing, the button (1) to a fabric, wherein the body (10) of the button (1) has a tapering width (w), seen in a direction parallel to the plane of the lower surface (13) of the body (10), wherein the button (1) is further provided with attachment means (3) at or near the circumferential edge (11) of the body (10) and wherein the width (w) of the body (10) tapers towards the location (6) of the attachment means (3) at or near the edge (11).