

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 September 2005 (15.09.2005)

PCT

(10) International Publication Number
WO 2005/084173 A2

(51) International Patent Classification: **Not classified**

(21) International Application Number:
PCT/US2004/032981

(22) International Filing Date: 7 October 2004 (07.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/509,577 7 October 2003 (07.10.2003) US
10/714,572 13 November 2003 (13.11.2003) US

(71) Applicant (for all designated States except US): **TASER INTERNATIONAL, INC.** [US/US]; 7860 East McClain Dr., Suite 2, Scottsdale, AZ 85260-1627 (US).

(72) Inventors: **SMITH, Patrick, W.**; 4724 E. White Drive, Paradise Valley, AZ 85253 (US). **NERHEIM, Magne, H.**; 7033 E. Joan De Arc, Scottsdale, AZ 85254 (US).

(74) Agent: **BACHAND, William, R.**; Taser International, Inc., Legal Dept., 7860 E McClain Drive, Suite 2, Scottsdale, AZ 85260-1627 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: SYSTEMS AND METHODS USING AN ELECTRIFIED PROJECTILE

(57) Abstract: An apparatus for immobilizing a target includes electrodes deployed after contact is made between the apparatus and the target. Spacing of deployed electrodes may be more accurate and/or more repeatable for more effective delivery of an immobilizing stimulus signal.

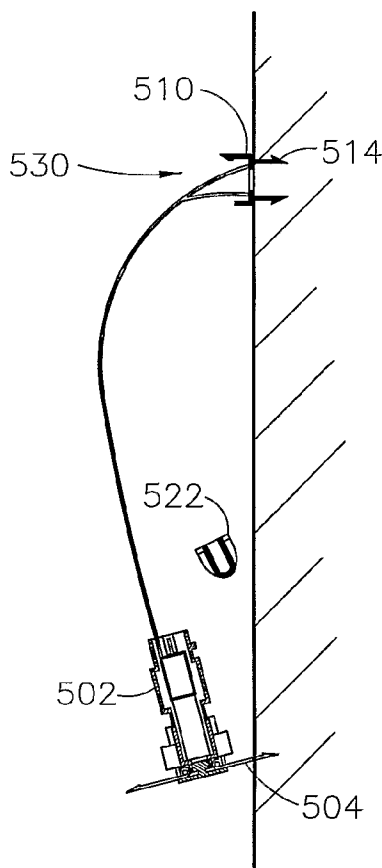

WO 2005/084173 A2



FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*