

FIG. 1

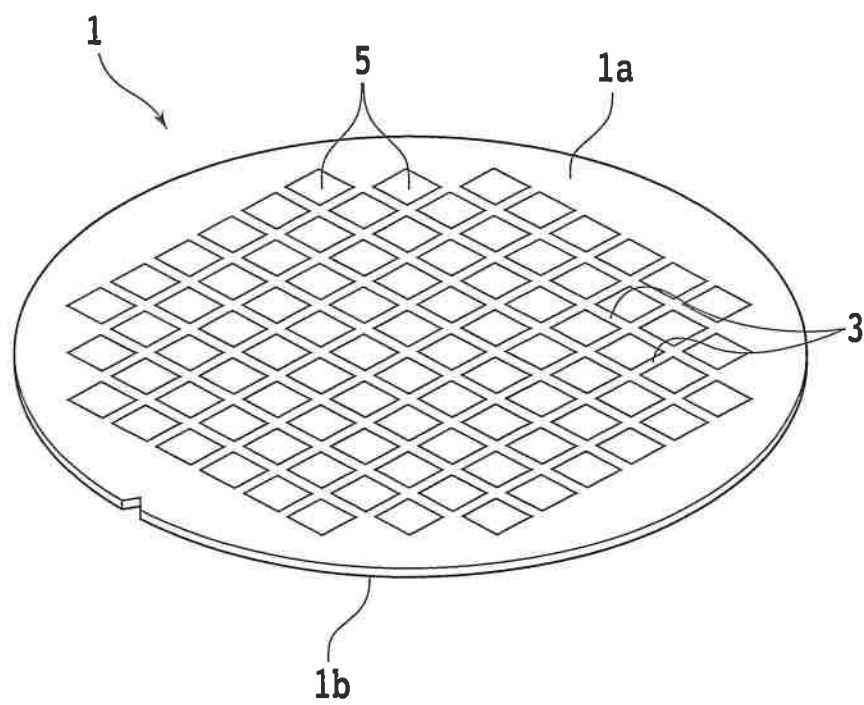


FIG. 2


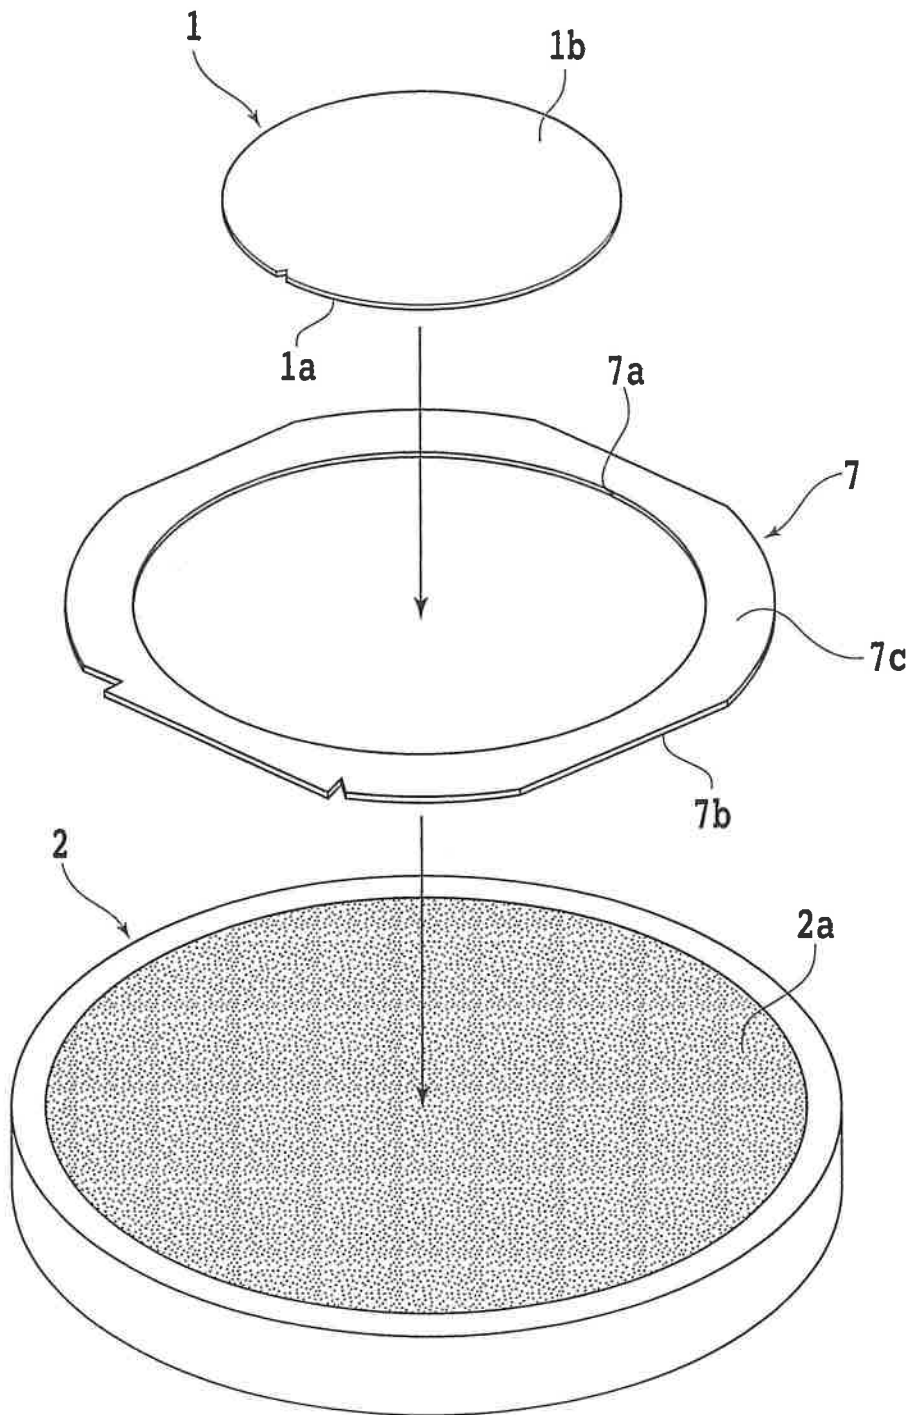


FIG. 3

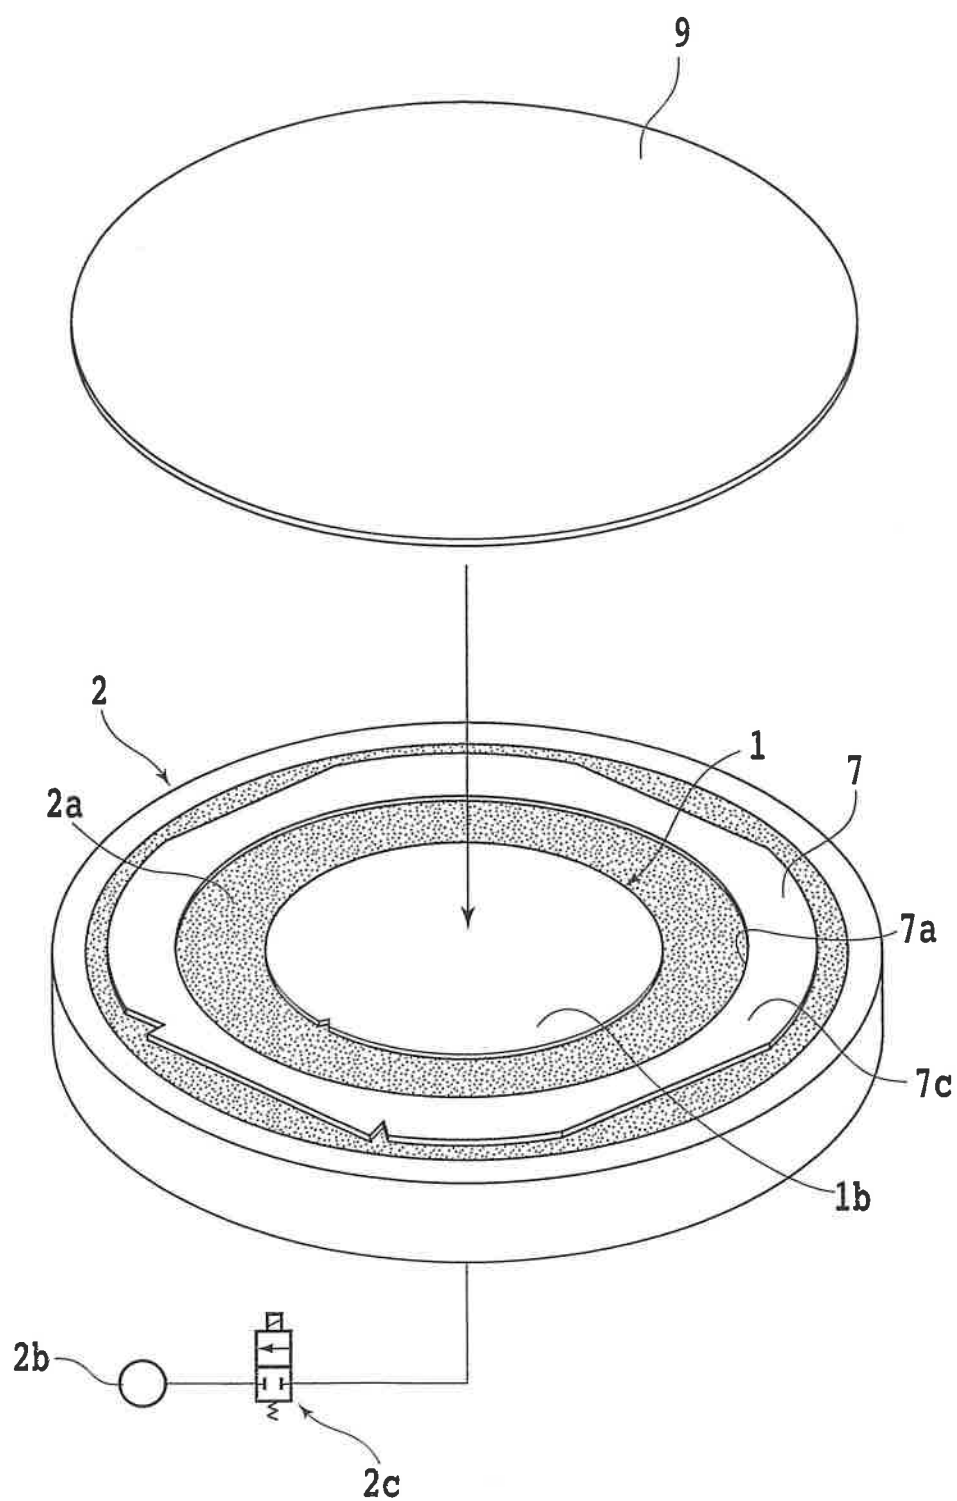

2

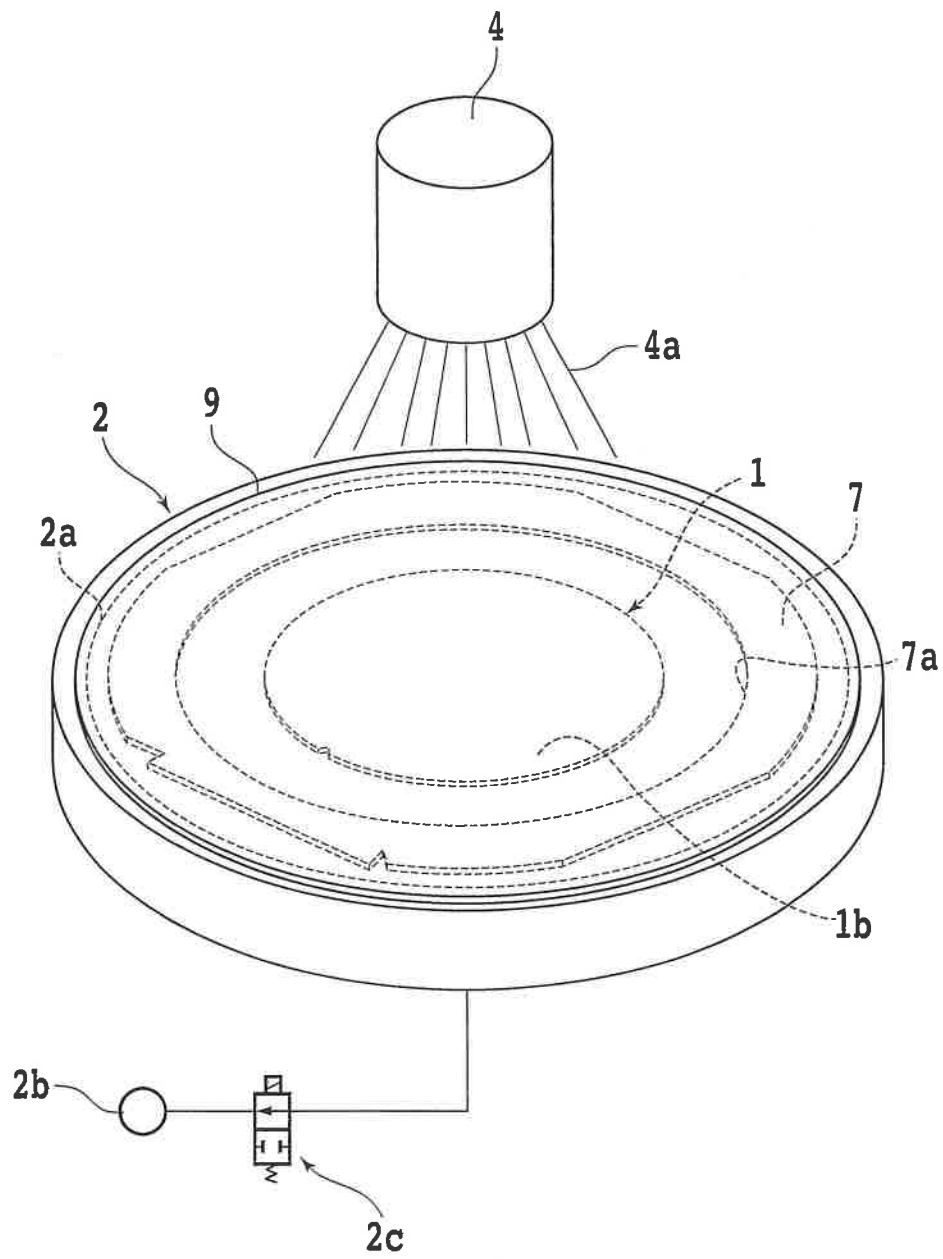


FIG. 5

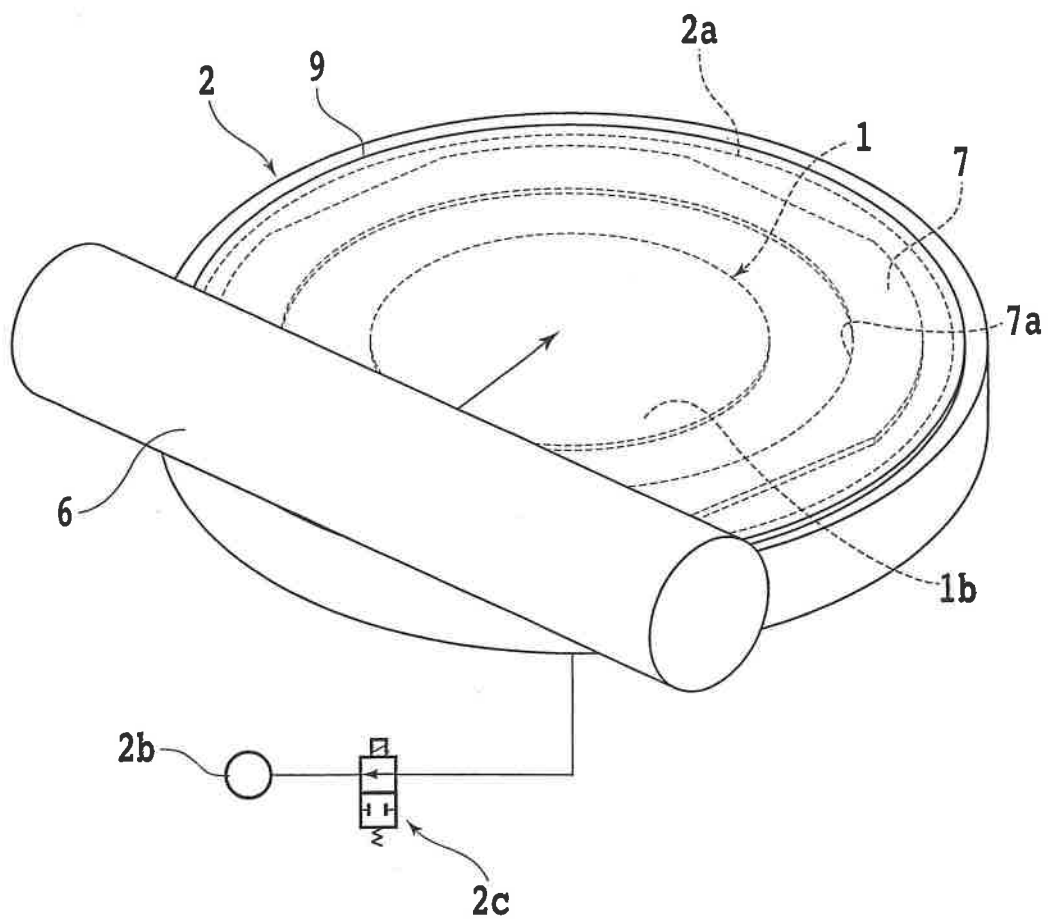


FIG. 6

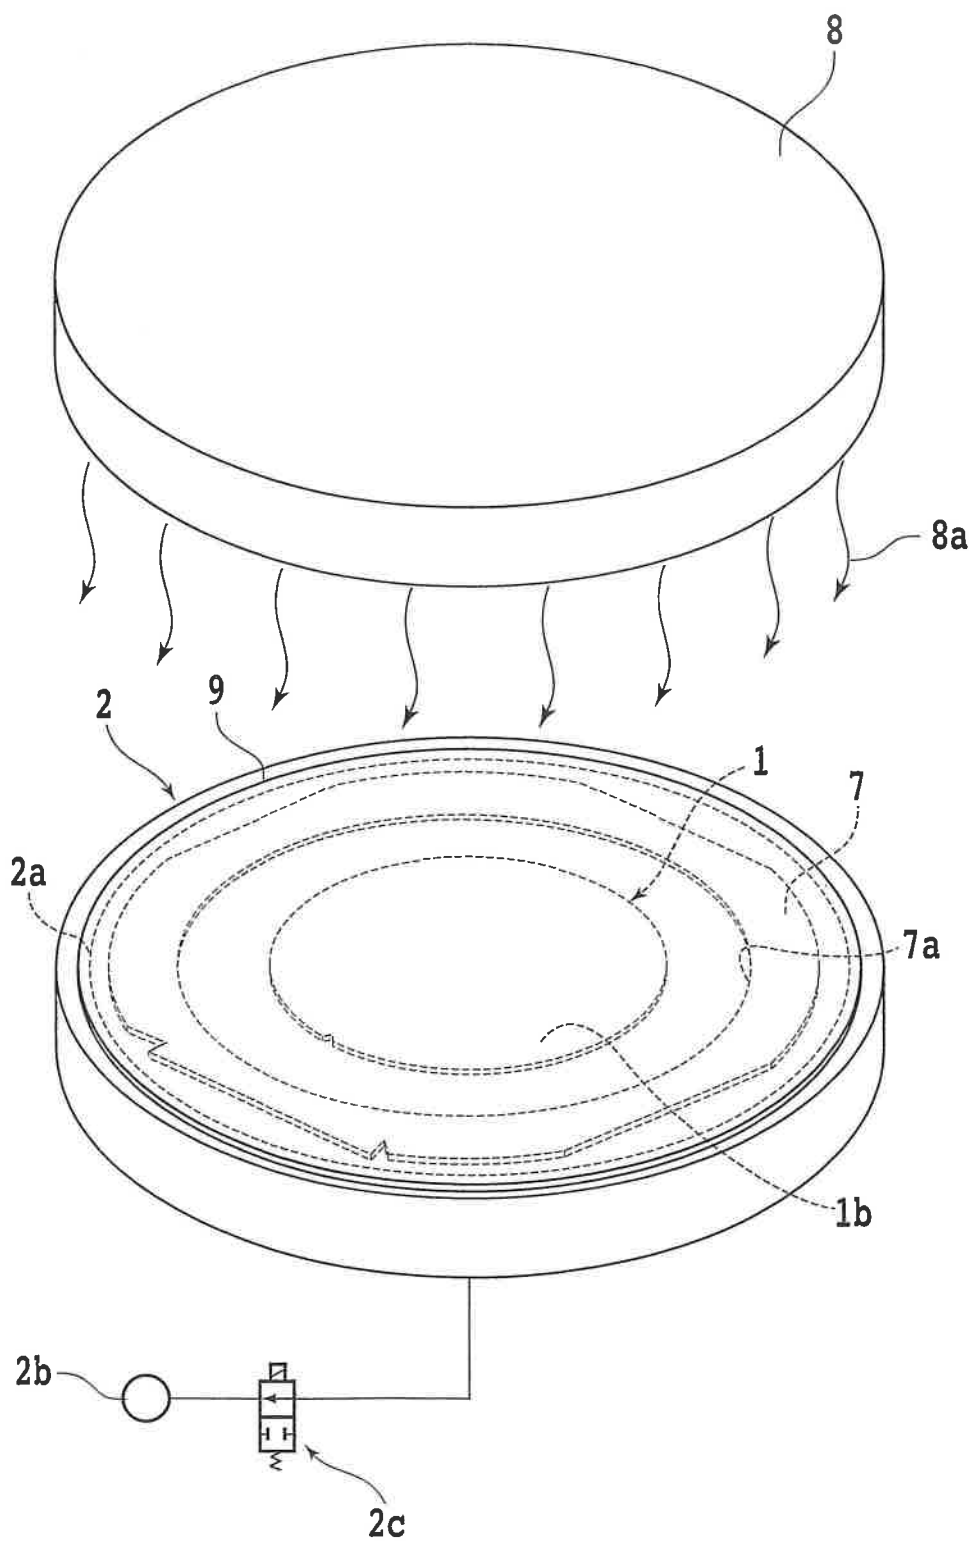


FIG. 7A

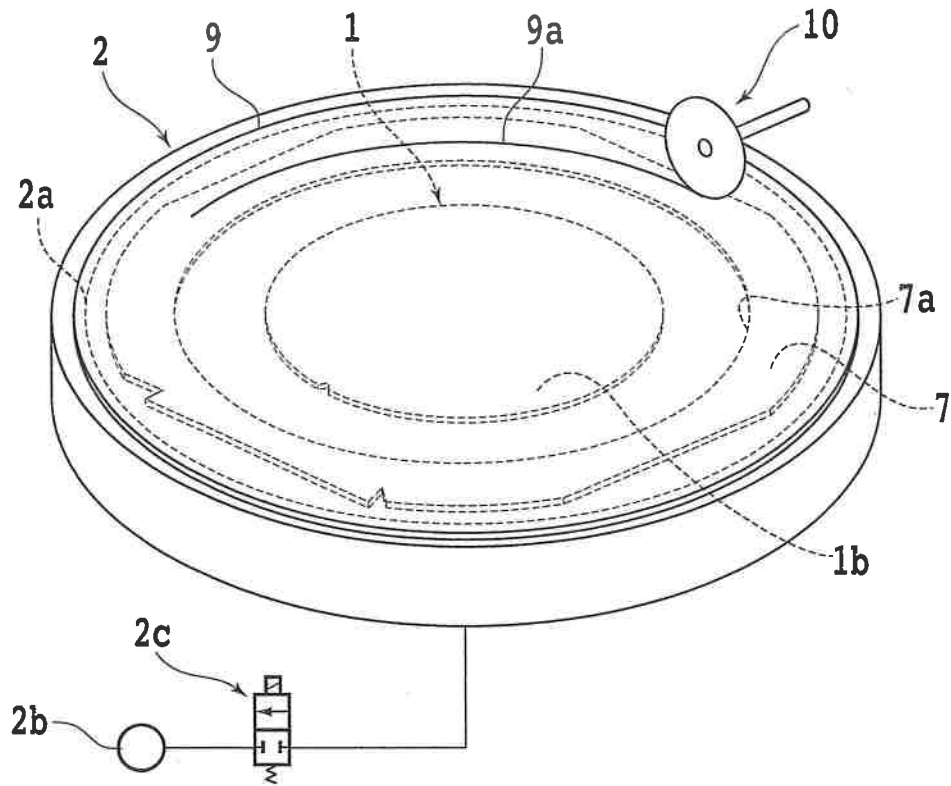


FIG. 7 B

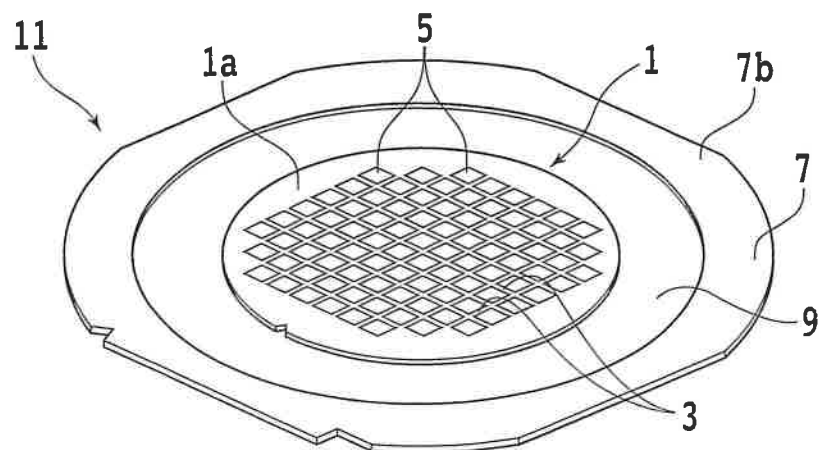


FIG. 8


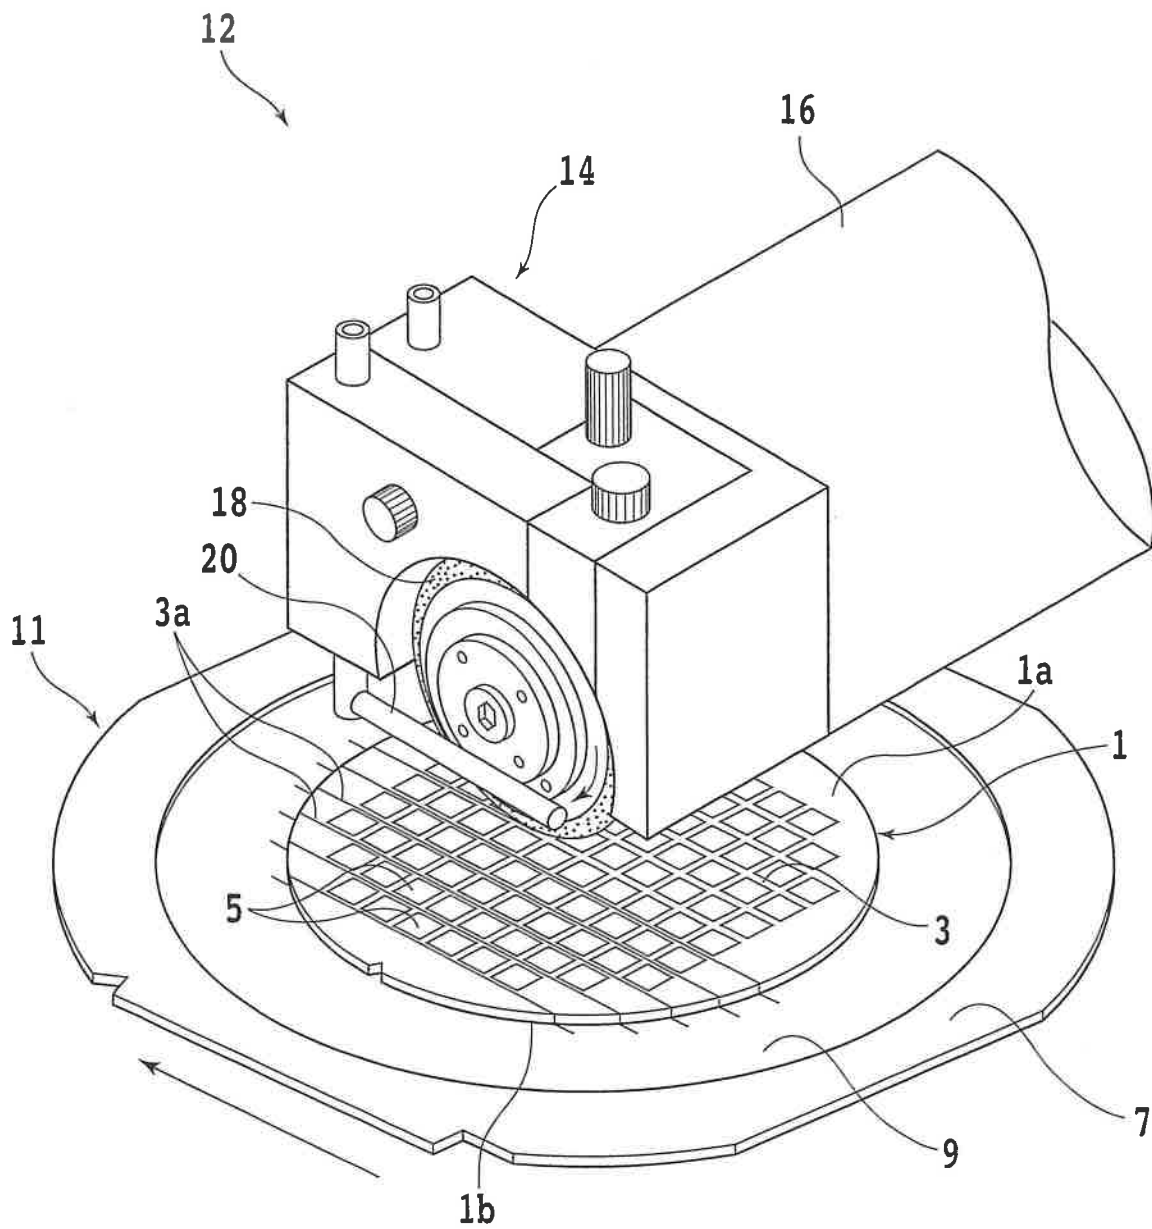


FIG. 9

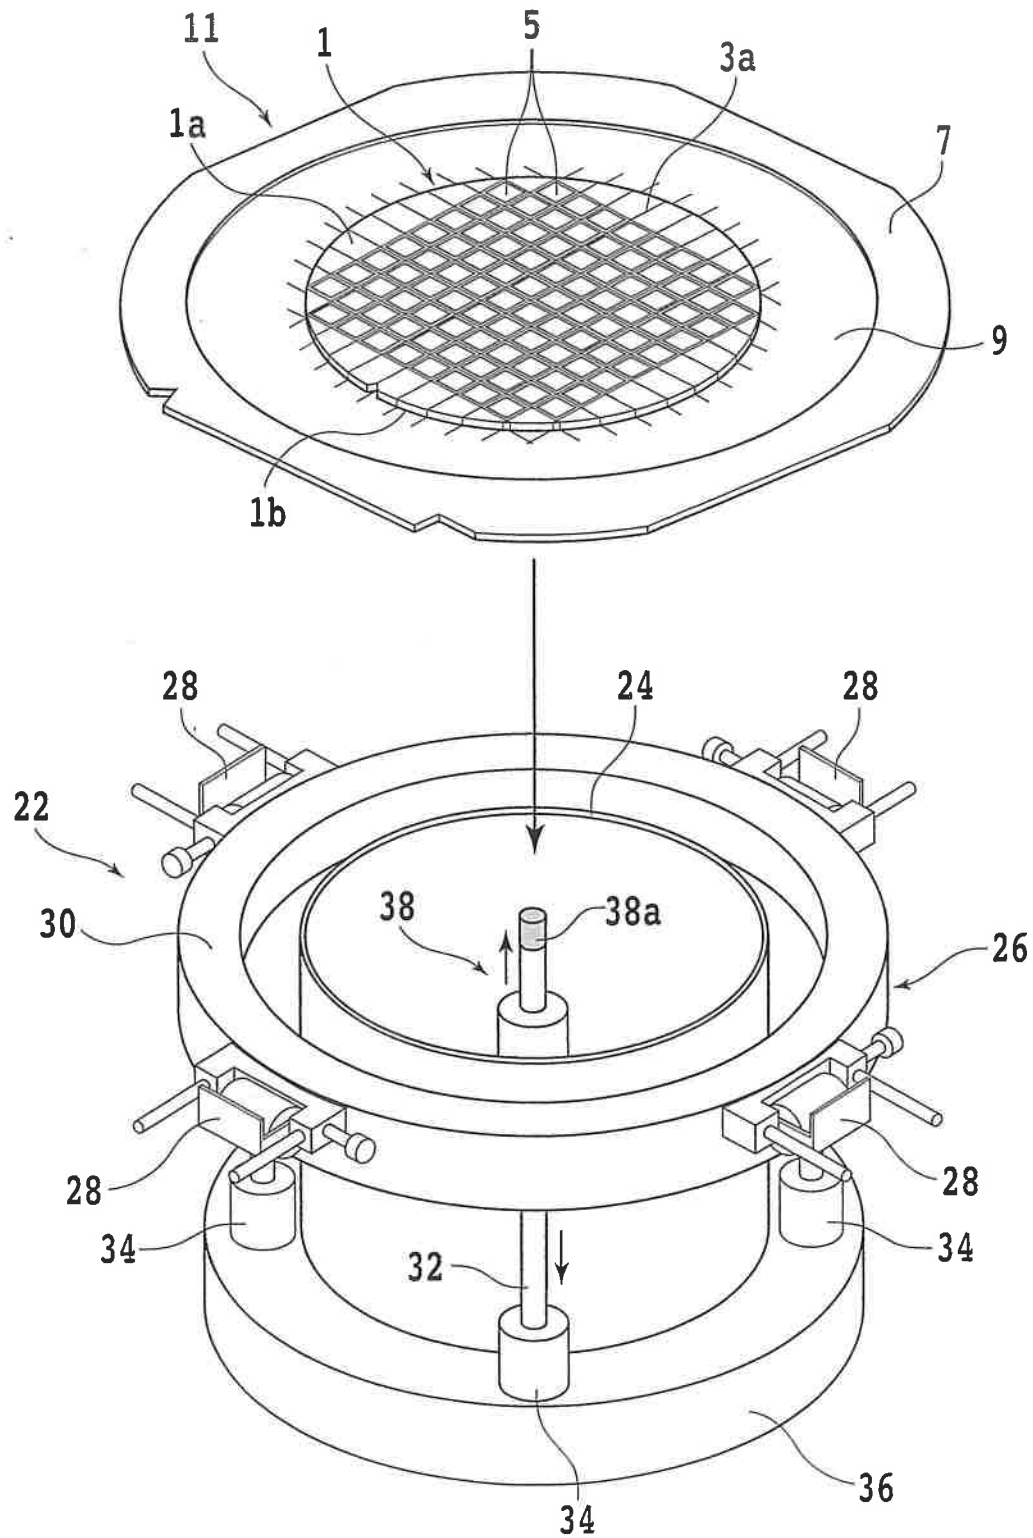

This diagram shows a cross-sectional view of a container assembly. A central vertical assembly (38) is positioned within the container, featuring a lower cylindrical part (38a) and an upper section (38b) that terminates in a horizontal plate (38c). This plate is situated directly beneath a series of rectangular components (11) that form the inner surface of the lid (9). A fluid inlet (40) enters from the top, passes through a valve (40b), and connects to a pump (40a). The lid (9) is secured by a clamping mechanism (28) on both sides, which includes a bolt (30) and a nut (26). The entire assembly is supported by a base (24). Various other components are labeled with numbers: 1, 2, 3, 4, 5, 6, 7, 8, 10, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 25, 27, 29, 31, 33, 35, 36, 37, 39, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100.