

-1-

REPLACED SHEETS		SG
☒	Description : paged to paged	
☒	Claim(s) : paged to paged	
☒	Drawing(s) : paged to paged	
☒	Abstract : paged to paged	
DATE OF RECEIPT		

**WAX ISOMERIZATION USING
CATALYST OF SPECIFIC PORE GEOMETRY**

5 **Cross-Reference**

This application is a continuation-in-part of co-pending application Serial No. 07/311,969, filed February 17, 1989.

10 **Field Of The Invention**

The present invention relates to a process for isomerizing a waxy feed, including petroleum waxes, over a catalyst having a particular pore geometry and including at least one Group VIII metal to produce a lube oil having a low pour point and excellent viscosity and viscosity index properties.

15 **Background Of The Invention**

20 High-quality lubricating oils are critical for the operation of modern machinery and automobiles. Unfortunately, the supply of natural crude oils having good lubricating properties is not adequate for present demands. Due to
25 uncertainties in world crude oil supplies, high-quality lubricating oils must be produced from ordinary crude feedstocks and can even be produced from paraffinic synthetic polymers. Numerous processes have been proposed for producing
30 lubricating oils that can be converted into other products by upgrading the ordinary and low-quality stocks.

35 It is desirable to upgrade a crude fraction otherwise unsuitable for lubricant manufacture into one from which good yields of lube oils can

This Sheet Has Been Replaced



be obtained. Dewaxing is required when highly paraffinic oils are to be used in products which need to remain mobile at low temperatures, e.g., lubricating oils, heating oils and jet fuels. The
5 higher molecular weight straight chain normal and slightly branched paraffins which are present in oils of this kind are waxes which cause high pour points and high cloud points in the oils. If
adequately low pour points are to be obtained,
10 these waxes must be wholly or partly removed. In the past, various solvent removal techniques were used such as propane dewaxing and MEK dewaxing but these techniques are costly and time consuming. Catalytic dewaxing processes are more economical
15 and achieve this end by selectively cracking the longer chain n-paraffins to produce lower molecular weight products, some of which may be removed by distillation.

Because of their selectivity, prior art
20 dewaxing catalysts generally comprise an aluminosilicate zeolite having a pore size which admits the straight chain n-paraffins either alone or with only slightly branched chain paraffins (sometimes referred to herein as waxes), but which
25 excludes more highly branched materials, cycloaliphatics and aromatics. Zeolites such as ZSM-5, ZSM-11, ZSM-12, ZSM-23, ZSM-35 and ZSM-38 have been proposed for this purpose in dewaxing processes and are described in U.S. Patents Nos.
30 3,894,938; 4,176,050; 4,181,598; 4,222,855; 4,229,282 and 4,247,388. Such processes as are set forth in the above-mentioned patents are used to accomplish dewaxing on feeds which contain relatively low amounts of waxes, generally well



below 50%, and they operate by selectively cracking the waxes. These processes are not readily adapted for treating high wax content feeds since, due to the large amount of cracking which occurs, such waxes would tend to be cracked to provide very low molecular weight products.

Since dewaxing processes of this kind function by means of cracking reactions, a number of useful products become degraded to lower molecular weight materials. For example, waxy paraffins may be cracked to butane, propane, ethane and methane as may the lighter n-paraffins which do not contribute to the waxy nature of the oil. Because these lighter products are generally of lower value than the higher molecular weight materials, it would obviously be desirable to limit the degree of cracking which takes place during a catalytic dewaxing process.

Although U.S. Patents Nos. 3,700,585; 3,894,938; 4,176,050; 4,181,598; 4,222,855; 4,222,282; 4,247,388 and 4,859,311 teach dewaxing of waxy feeds, the processes disclosed therein do not disclose a process for producing high yields of a lube oil having a very low pour point and high viscosity index from feeds containing a very high wax content, i.e., greater than 80% wax, such as slack wax, deoiled wax or synthetic liquid polymers such as low molecular weight polyethylene.

Also, the prior art does not disclose a lube oil characterized by having both a low pour point (below about -24°C) and a viscosity index greater than 125. It is believed that the closest that the prior art comes to accomplishing this is



set forth in one or more of U.S. Patents 3,365,390
(pour point -23°C, viscosity index 124); 3,658,689
(pour point -54°C, viscosity index 92 as
calculated from Table III of the patent);
5 3,764,516 (same as 3,658,689); 3,487,005 (pour
point -29°C, viscosity index 121 and 125 and pour
point -46°C, viscosity index 122) and 4,547,283
pour point not specified but probably above 0°C as
made by solvent dewaxing, viscosity index 154-
10 156).

Since processes which remove wax will give
a low yield with very waxy feeds, isomerization
processes are preferred. U.S. Patent No.
4,734,539 discloses a method for isomerizing a
15 naphtha feed using an intermediate pore size
zeolite catalyst, such as an H-offretite catalyst.
U.S. Patent No. 4,518,485 discloses a process for
dewaxing a hydrocarbon feedstock containing
paraffins by a hydrotreating and isomerization
20 process.

U.S. Patent No. 4,689,138 discloses an
isomerization process for reducing the normal
paraffin content of a hydrocarbon oil feedstock
using a catalyst comprising an intermediate pore
25 size silicoaluminophosphate molecular sieve
containing a Group VIII metal component which is
occluded in the crystals during growth.

Lube oils may also be prepared from feeds
having a high wax content such as slack wax by an
isomerization process. In prior art wax
30 isomerization processes, however, either the yield
is low and thus the process is uneconomical, or
the feed is not completely dewaxed. When the feed
is not completely dewaxed it must be recycled to a



dewaxing process, e.g., a solvent dewaxer, which limits the throughput and increases cost. U.S. Patent No. 4,547,283 discloses converting wax to lube. However, the MEK dewaxing following isomerization disclosed therein severely limits pour reduction and thus, very low pour points cannot be achieved. Further, the catalyst disclosed therein is much less selective than the catalysts used in the present invention.

Summary Of The Invention

The present invention overcomes the problems and disadvantages of the prior art by providing a process for preparing a lube oil comprising isomerizing a waxy feed over a catalyst comprising an inorganic oxide molecular sieve having generally oval 1-D pores having a minor axis between about 4.2Å and about 4.8Å and a major axis between about 5.4Å and about 7.0Å as determined by X-ray crystallography and at least one Group VIII metal.

It is an object of the invention to produce a lube oil having excellent viscosity and viscosity index properties and a very low pour point.

It is a further object of the invention to provide a lube oil having low frictional resistance.

It is an additional object of the invention to provide a lube oil which causes less engine wear than prior art mineral oils.

It is an additional object of the invention to provide a lube oil which provides increased fuel efficiency.



It is yet a further object of the invention to provide a lube oil having improved oxidation resistance compared to conventional mineral oils. The term "oxidation resistance" refers to the resistance of the oil to oxygen addition, i.e., how rapidly oxygen is picked up and added to molecular species within the oil. Oxidation resistance is indicated by the oxidator BN measured in hours. Oxidator BN measures the time required for 100 grams of oil to absorb one liter of oxygen and is described in U.S. Patent No. 3,852,207 at column 6, lines 15-30 which is incorporated herein by reference.

Additional objects and advantages of the invention will be set forth in part in the description which follows, and in part will be obvious from the description, or may be learned by practice of the invention. The objects and advantages of the invention will be realized and attained by means of the instrumentalities and combinations, particularly pointed out in the appended claims.

In accordance with one embodiment the invention provides a process for producing a lube oil having excellent viscosity and viscosity index properties and a low pour point comprising isomerizing a waxy feed over a catalyst comprising an intermediate pore size silicoaluminophosphate molecular sieve and at least one Group VIII metal.

In accordance with another embodiment of the invention the catalyst in the process comprises an intermediate pore size ZSM-22, ZSM-23 or ZSM-35 zeolite.



The lube oil of the invention has a high paraffinic content which provides a low viscosity for its boiling range. Such properties result in less frictional resistance, less engine wear and increased fuel efficiency. The low viscosity and low pour point of the lube oil result in easier cold engine starting than prior art mineral oils. The lube oil has a high viscosity index ranging from about 125 to about 180 and a very low pour point, ranging from less than about -63°C to about -24°C. Since little or no viscosity index improver compositions or pour point depressant compositions are necessary for use with the lube oil of the invention, fewer performance-decreasing deposits are formed. The high paraffinic nature of the oil gives it improved oxidation resistance compared to conventional mineral oils.

Brief Description Of The Drawings

The invention will be better understood by reference to figures of the drawings wherein like numbers denote like parts throughout and wherein:

Figure 1 is a ternary diagram showing the compositional parameters of the silicoaluminophosphates of U.S. Patent No. 4,440,871 in terms of mole fractions of silicon, aluminum and phosphorus.

Figure 2 is a ternary diagram showing the preferred compositional parameters of the silicoaluminophosphates of mole fractions of silicon, aluminum and phosphorus.

Figure 3 is a plot of 700 F+ lube yield versus pour point for the process set forth in Example 3.

This Sheet Has Been Replaced



Figure 4 is a plot of viscosity index versus pour point for the process set forth in Example 3.

5 Detailed Description Of The Preferred Embodiments

Reference will now be made in detail to the present preferred embodiments of the invention.

As used herein, the term "waxy feed" includes petroleum waxes. The feedstock employed
10 in the process of the invention preferably contains greater than about 50% wax, more preferably greater than about 80% wax, most preferably greater than about 90% wax. However, a highly paraffinic feed having a high pour point,
15 generally above about 0°C, more usually above about 10°C, but containing less than 50% wax is also suitable for use in the process of the invention. Such a feed should preferably contain greater than about 70% paraffinic carbon, more
20 preferably greater than about 80% paraffinic carbon, most preferably greater than about 90% paraffinic carbon.

Exemplary additional suitable feeds for use in the process of the invention include waxy
25 distillate stocks such as gas oils, lubricating oil stocks, synthetic oils such as those by Fischer-Tropsch synthesis, high pour point polyalphaolefins, foots oils, synthetic waxes such as normal alphaolefin waxes, slack waxes, deoiled
30 waxes and microcrystalline waxes. Foots oil is prepared by separating oil from the wax. The isolated oil is referred to as foots oil.

Feeds also suitable for use in the process of the invention are partially dewaxed oils



wherein dewaxing to an intermediate pour point has been carried out by a process other than that claimed herein, for example, conventional catalytic dewaxing processes and solvent dewaxing processes. Exemplary suitable solvent dewaxing processes are set forth in U.S. Patent No. 4,547,287.

The process of the invention may also be employed in combination with conventional dewaxing processes to achieve a lube oil having particular desired properties. For example, the process of the invention can be used to reduce the pour point of a lube oil to a desired degree. Further reduction of the pour point can then be achieved using a conventional dewaxing process. Under such circumstances, immediately following the isomerization process of the invention, the lube oil may have a pour point greater than about 15°F. Further, the pour point of the lube oil produced by the process of the invention can be reduced by adding pour point depressant compositions thereto.

The feedstock will normally be a $C_{20}+$ feedstock generally boiling above about 600°F. However, the process of the invention is particularly useful with waxy distillate stocks such as gas oils, lubricating oil stocks, heating oils and other distillate fractions whose pour point and viscosity need to be maintained within certain specification limits. Lubricating oil stocks will generally boil above 230°C (450°F), more usually above 315°C (600°F). Hydroprocessed stocks are a convenient source of stocks of this kind and also of other distillate fractions since they normally contain significant amounts of waxy



n-paraffins. The feedstock of the present process will normally be a $C_{20}+$ feedstock containing paraffins, olefins, naphthenes, aromatics and heterocyclic compounds and a substantial
5 proportion of higher molecular weight n-paraffins and slightly branched paraffins which contribute to the waxy nature of the feedstock. During processing, the n-paraffins and the slightly branched paraffins undergo some cracking
10 or hydrocracking to form liquid range materials which contribute to a low viscosity product. The degree of cracking which occurs is, however, limited so that the yield of low boiling products is reduced, thereby preserving the economic value
15 of the feedstock.

Slack wax can be obtained from either a hydrocracked lube oil or a solvent refined lube oil. Hydrocracking is preferred because that process can also reduce the nitrogen content to
20 low values. With slack wax derived from solvent refined oils, deoiling can be used to reduce the nitrogen content. Optionally, hydrotreating of the slack wax can be carried out to lower the nitrogen content thereof. Slack waxes possess a
25 very high viscosity index, normally in the range of from 140 to 200, depending on the oil content and the starting material from which the wax has been prepared. Slack waxes are therefore eminently suitable for the preparation of
30 lubricating oils having very high viscosity indices, i.e., from about 120 to about 180.

The present invention provides a unique lube oil product as characterized by its combination of low pour point and high viscosity



index. The lube oil is characterized by a pour point below -24°C (generally between -24°C and -63°C) and a viscosity index between 125 and 180, suitably greater than about 130. Preferably the pour point is below -30°C , more preferably below -40°C , and the viscosity index is greater than about 140.

While the process of the invention can be practiced with utility when the feed contains organic (nitrogen containing impurities), it is preferred that the organic nitrogen content of the feed be less than about 50 ppmw (parts per million by weight), more preferably less than about 10 ppmw. Particularly good results, in terms of activity and length of catalyst cycle (period between successive regenerations or start-up and first regeneration) are experienced when the feed contains less than about 10 ppmw of organic nitrogen.

The phrase "intermediate pore size", as used herein means an effective pore aperture in the range of from about 5.3 to about 6.5 Å when the porous inorganic oxide is in the calcined form. Molecular sieves having pore apertures in this range tend to have unique molecular sieving characteristics. Unlike small pore zeolites such as erionite and chabazite, they will allow hydrocarbons having some branching into the molecular sieve void spaces. Unlike larger pore zeolites such as the faujasites and mordenites, they can differentiate between n-alkanes and slightly branched alkanes, and larger branched alkanes having, for example, quaternary carbon atoms.



The effective pore size of the molecular sieves can be measured using standard adsorption techniques and hydrocarbonaceous compounds of known minimum kinetic diameters. See Breck, Zeolite Molecular Sieves, 1974 (especially Chapter 8); Anderson, et al., J. Catalysis 58, 114 (1979); and U.S. Patent No. 4,440,871, the pertinent portions of which are incorporated herein by reference.

In performing adsorption measurements to determine pore size, standard techniques are used. It is convenient to consider a particular molecule as excluded if it does not reach at least 95% of its equilibrium adsorption value on the molecular sieve in less than about 10 minutes ($p/p_0 = 0.5$; 25°C).

Intermediate pore size molecular sieves will typically admit molecules having kinetic diameters of 5.3 to 6.5 Å with little hindrance. Examples of such compounds (and their kinetic diameters in Å) are: n-hexane (4.3), 3-methylpentane (5.5), benzene (5.85), and toluene (5.8). Compounds having kinetic diameters of about 6 to 6.5 Å can be admitted into the pores, depending on the particular sieve, but do not penetrate as quickly and in some cases are effectively excluded. Compounds having kinetic diameters in the range of 6 to 6.5 Å include: cyclohexane (6.0), 2,3-dimethylbutane (6.1), and m-xylene (6.1). Generally, compounds having kinetic diameters of greater than about 6.5 Å do not penetrate the pore apertures and thus are not absorbed into the interior of the molecular sieve lattice. Examples of such larger compounds



include: o-xylene (6.8), 1,3,5-trimethylbenzene (7.5), and tributylamine (8.1).

The preferred effective pore size range is from about 5.5 to about 6.2 Å.

5 While the effective pore size as discussed above is important to the practice of the invention not all intermediate pore size molecular
10 sieves having such effective pore sizes are advantageously usable in the practice of the present invention. Indeed, it is essential that
15 the intermediate pore size molecular sieve catalysts used in the practice of the present invention have a very specific pore shape and size
20 as measured by X-ray crystallography. First, the intracrystalline channels must be parallel and must not be interconnected. Such channels are
25 conventionally referred to as 1-D diffusion types or more shortly as 1-D pores. The classification of intrazeolite channels as 1-D, 2-D and 3-D is
30 set forth by R. M. Barrer in Zeolites, Science and Technology, edited by F. R. Rodrigues, L. D. Rollman and C. Naccache, NATO ASI Series, 1984
 which classification is incorporated in its entirety by reference (see particularly page 75).
 Known 1-D zeolites include cancrinite hydrate, laumontite, mazzite, mordenite and zeolite L.

 None of the above listed 1-D pore zeolites, however, satisfies the second essential criterion for catalysts useful in the practice of the
30 present invention. This second essential criterion is that the pores must be generally oval in shape, by which is meant the pores must exhibit two unequal axes referred to herein as a minor axis and a major axis. The term oval as used



herein is not meant to require a specific oval or elliptical shape but rather to refer to the pores exhibiting two unequal axes. In particular, the 1-D pores of the catalysts useful in the practice of the present invention must have a minor axis between about 4.2 Å and about 4.8 Å and a major axis between about 5.4 Å and about 7.0 Å as determined by conventional X-ray crystallography measurements.


The catalyst used in the isomerization process of the invention has an acidic component and a platinum and/or palladium hydrogenation component. In accordance with one embodiment of the invention the acidic component can suitably comprise an intermediate pore size silicoaluminophosphate molecular sieve which is described in U.S. Patent No. 4,440,871, the pertinent disclosure of which is incorporated herein by reference.

The most preferred intermediate pore size silicoaluminophosphate molecular sieve for use in the process of the invention is SAPO-11. SAPO-11 comprises a molecular framework of corner-sharing $[\text{SiO}_2]$ tetrahedra, $[\text{AlO}_2]$ tetrahedra and $[\text{PO}_2]$ tetrahedra, [i.e., $(\text{Si}_x\text{Al}_y\text{P}_z)\text{O}_2$ tetrahedral units]. When combined with a platinum or palladium hydrogenation component, the SAPO-11 converts the waxy components to produce a lubricating oil having excellent yield, very low pour point, low viscosity and high viscosity index.

SAPO-11 comprises a silicoaluminophosphate material having a three-dimensional microporous crystal framework structure of $[\text{PO}_2]$, $[\text{AlO}_2]$ and $[\text{SiO}_2]$ tetrahedral units whose unit empirical



formula on an anhydrous basis is:



wherein "R" represents at least one organic templating agent present in the intracrystalline pore system; "m" represents the moles of "R" present per mole of $(Si_xAl_yP_z)O_2$ and has a value of from zero to about 0.3, "x", "y" and "z" represent respectively, the mole fractions of silicon, aluminum and phosphorous, said mole fractions being within the compositional area bounded by points A, B, C, D and E on the ternary diagram of Figure 1 or preferably within the area bounded by points a, b, c, d and e on the ternary diagram of Figure 2. The silicoaluminophosphate has a characteristic X-ray powder diffraction pattern which contains at least the d-spacings (as-synthesized and calcined) set forth below in Table I. When SAPO-11 is in the as-synthesized form "m" preferably has a value of from 0.02 to 0.3.

This Sheet Has Been Replaced



TABLE I

	<u>2θ</u>	<u>d(Å)</u>	<u>Relative Intensity</u>
5	9.4 - 9.65	9.41 - 9.17	m
	20.3 - 20.6	4.37 - 4.31	m
	21.0 - 21.3	4.23 - 4.17	vs
	22.1 - 22.35	4.02 - 3.99	m
	22.5 - 22.9 (doublet)	3.95 - 3.92	m
10	23.15 - 23.35	3.84 - 3.81	m-s

All of the as-synthesized SAPO-11 compositions for which X-ray powder diffraction data have been obtained to date have patterns which are within the generalized pattern of Table II below.

These values were determined by standard techniques. The radiation was the K-alpha doublet of copper and a diffractometer equipped with a scintillation counter and an associated computer was used. The peak heights, I , and the positions as a function of 2θ , where θ is the Bragg angle, were determined using algorithms on the computer associated with the spectrometer. From these, the relative intensities, $100 I/I_0$, where I_0 is the intensity of the strongest line or peak, and d (obs.) the interplanar spacing in Angstroms, corresponding to the recorded lines, were determined. In the Tables, the relative intensities are given in terms of the symbols vs = very strong, s = strong, m = medium, w = weak, etc.

This Sheet Has Been Replaced




TABLE II

	<u>2θ</u>	<u>d(Å)</u>	<u>100XI/I₀</u>
5	8.05 - 8.3	10.98 - 10.65	20 - 42
	9.4 - 9.65	9.41 - 9.17	36 - 58
	13.1 - 13.4	6.76 - 6.61	12 - 16
	15.6 - 15.85	5.68 - 5.59	23 - 38
10	16.2 - 16.4	5.47 - 5.40	3 - 5
	18.95 - 19.2	4.68 - 4.62	5 - 6
	20.3 - 20.6	4.37 - 4.31	36 - 49
	21.0 - 21.3	4.23 - 4.17	100
	22.1 - 22.35	4.02 - 3.99	47 - 59
15	22.5 - 22.9 (doublet)	3.95 - 3.92	55 - 60
	23.15 - 23.35	3.84 - 3.81	64 - 74
	24.5 - 24.9 (doublet)	3.63 - 3.58	7 - 10
	26.4 - 26.8 (doublet)	3.38 - 3.33	11 - 19
	27.2 - 27.3	3.28 - 3.27	0 - 1
20	28.3 - 28.5 (shoulder)	3.15 - 3.13	11 - 17
	28.6 - 28.85	3.121 - 3.094	
	29.0 - 29.2	3.079 - 3.058	0 - 3
	29.45 - 29.65	3.033 - 3.013	5 - 7
	31.45 - 31.7	2.846 - 2.823	7 - 9
25	32.8 - 33.1	2.730 - 2.706	11 - 14
	34.1 - 34.4	2.629 - 2.607	7 - 9
	35.7 - 36.0	2.515 - 2.495	0 - 3
	36.3 - 36.7	2.475 - 2.449	3 - 4
	37.5 - 38.0 (doublet)	2.398 - 2.368	10 - 13
30	39.3 - 39.55	2.292 - 2.279	2 - 3
	40.3	2.238	0 - 2
	42.2 - 42.4	2.141 - 2.132	0 - 2
	42.8 - 43.1	2.113 - 2.099	3 - 6
	44.8 - 45.2 (doublet)	2.023 - 2.006	3 - 5
35	45.9 - 46.1	1.977 - 1.969	0 - 2
	46.8 - 47.1	1.941 - 1.929	0 - 1
	48.7 - 49.0	1.870 - 1.859	2 - 3
	50.5 - 50.8	1.807 - 1.797	3 - 4
	54.6 - 54.8	1.681 - 1.675	2 - 3
40	55.4 - 55.7	1.658 - 1.650	0 - 2

This Sheet Has Been Replaced



Another intermediate pore size
silicoaluminophosphate molecular sieve preferably
used in the process of the invention is SAPO-31.
SAPO-31 comprises a silicoaluminophosphate having
a three-dimensional microporous crystal framework
of $[\text{PO}_2]$, $[\text{AlO}_2]$ and $[\text{SiO}_2]$ tetrahedral units whose
unit empirical formula on an anhydrous basis is:



wherein R represents at least one organic
templating agent present in the intracrystalline
pore system; "m" represents the moles of "R"
present per mole of $(\text{Si}_x\text{Al}_y\text{P}_z)\text{O}_2$ and has a value of
from zero to 0.3; "x", "y" and "z" represent
respectively, the mole fractions of silicon,
aluminum and phosphorous, said mole fractions
being within the compositional area bounded by
points A, B, C, D and E on the ternary diagram of
Figure 1, or preferably within the area bounded by
points a, b, c, d and e on the ternary diagram of
Figure 2. The silicoaluminophosphate has a
characteristic X-ray powder diffraction pattern
(as-synthesized and calcined) which contains at
least the d-spacings set forth below in Table III.
When SAPO-31 is in the as-synthesized form, "m"
preferably has a value of from 0.02 to 0.3.

This Sheet Has Been Replaced



TABLE III

	<u>2θ</u>	<u>d(Å)</u>	<u>Relative Intensity</u>
5	8.5 - 8.6	10.40 - 10.28	m - s
	20.2 - 20.3	4.40 - 4.37	m
	21.9 - 22.1	4.06 - 4.02	w - m
	22.6 - 22.7	3.93 - 3.92	vs
10	31.7 - 31.8	3.823 - 2.814	w - m

15 All of the as-synthesized SAPO-31 compositions for which X-ray powder diffraction data have presently been obtained have patterns which are within the generalized pattern of Table IV below.

This Sheet Has Been Replaced



TABLE IV

	2θ	d(Å)	100XI/I ₀
5	6.1	14.5	0 - 1
	8.5 - 8.6*	10.40 - 10.28	60 - 72
	9.5*	9.31	7 - 14
	13.2 - 13.3*	6.71 - 6.66	1 - 4
10	14.7 - 14.8	6.03 - 5.99	1 - 2
	15.7 - 15.8*	5.64 - 5.61	1 - 8
	17.05 - 17.1	5.20 - 5.19	2 - 4
	18.3 - 18.4	4.85 - 4.82	2 - 3
	20.2 - 20.3	4.40 - 4.37	44 - 55
15	21.1 - 21.2*	4.21 - 4.19	6 - 28
	21.9 - 22.1*	4.06 - 4.02	32 - 38
	22.6 - 22.7*	3.93 - 3.92	100
	23.3 - 23.35	3.818 - 3.810	2 - 20
	25.1*	3.548	3 - 4
20	25.65 - 25.75	3.473 - 3.460	2 - 3
	26.5*	3.363	1 - 4
	27.9 - 28.0	3.198 - 3.187	8 - 10
	28.7*	3.110	0 - 2
	29.7	3.008	4 - 5
25	31.7 - 31.8	2.823 - 2.814	15 - 18
	32.9 - 33.0*	2.722 - 2.714	0 - 3
	35.1 - 35.2	2.557 - 2.550	5 - 8
	36.0 - 36.1	2.495 - 2.488	1 - 2
	37.2	2.417	1 - 2
30	37.9 - 38.1*	2.374 - 2.362	2 - 4
	39.3	2.292	2 - 3
	43.0 - 43.1*	2.103 - 2.100	1
	44.8 - 45.2*	2.023 - 2.006	1
	46.6	1.949	1 - 2
35	47.4 - 47.5	1.918	1
	48.6 - 48.7	1.872 - 1.870	2
	50.7 - 50.8	1.801 - 1.797	1
	51.6 - 51.7	1.771 - 1.768	2 - 3
40	55.4 - 55.5	1.658 - 1.656	1

* Possibly contains peak from a minor impurity.

SAPO-41, also suitable for use in the process of the invention, comprises a silicoaluminophosphate having a three-dimensional microporous crystal framework structure of [PO₂], [AlO₂] and [SiO₂] tetrahedral units, and whose unit empirical formula on an anhydrous basis is:





wherein R represents at least one organic templating agent present in the intracrystalline pore system; "m" represents the moles of "R" present per mole of $(Si_xAl_yP_z)O_2$ and has a value of from zero to 0.3; "x", "y" and "z" represent respectively, the mole fractions of silicon, aluminum and phosphorous, said mole fractions being within the compositional area bounded by points A, B, C, D and E on the ternary diagram of Figure 1, or preferably within the area bounded by points a, b, c, d and e on the ternary diagram of Figure 2, and said silicoaluminophosphate having a characteristic X-ray powder diffraction pattern (as-synthesized and calcined) which contains at least the d-spacings set forth below in Table V. When SAPO-41 is in the as-synthesized form "m" preferably has a value of from 0.02 to 0.03.

20

TABLE V

	<u>2θ</u>	<u>d(Å)</u>	<u>Relative Intensity</u>
	13.6 - 13.8	6.51 - 6.42	w - m
25	20.5 - 20.6	4.33 - 4.31	w - m
	21.1 - 21.3	4.21 - 4.17	vs
	22.1 - 22.3	4.02 - 3.99	m - s
	22.8 - 23.0	3.90 - 3.86	m
	23.1 - 23.4	3.82 - 3.80	w - m
30	25.5 - 25.9	3.493 - 3.44	w - m

All of the as-synthesized SAPO-41 compositions for which X-ray powder diffraction data have presently been obtained have patterns which are within the generalized pattern of Table VI below.

35

This Sheet Has Been Replaced



TABLE VI

	<u>2θ</u>	<u>d(Å)</u>	<u>100 X I/I₀</u>
5	6.7 - 6.8	13.19 - 12.99	15 - 24
	9.6 - 9.7	9.21 - 9.11	12 - 25
	13.6 - 13.8	6.51 - 6.42	10 - 28
	18.2 - 18.3	4.87 - 4.85	8 - 10
	20.5 - 20.6	4.33 - 4.31	10 - 32
10	21.1 - 21.3	4.21 - 4.17	100
	22.1 - 22.3	4.02 - 3.99	45 - 82
	22.8 - 23.0	3.90 - 3.87	43 - 58
	23.1 - 23.4	3.82 - 3.80	20 - 30
	25.2 - 25.5	3.53 - 3.49	8 - 20
15	25.5 - 25.9	3.493 - 3.44	12 - 28
	29.3 - 29.5	3.048 - 3.028	17 - 23
	31.4 - 31.6	2.849 - 2.831	5 - 10
	33.1 - 33.3	2.706 - 2.690	5 - 7
	37.6 - 37.9	2.392 - 2.374	10 - 15
20	38.1 - 38.3	2.362 - 2.350	7 - 10
	39.6 - 39.8	2.276 - 2.265	2 - 5
	42.8 - 43.0	2.113 - 2.103	5 - 8
	49.0 - 49.3	1.856 - 1.848	1 - 8
	51.5	1.774	0 - 8

25

The process of the invention may also be carried out using a catalyst comprising an intermediate pore size nonzeolitic molecular sieve containing AlO_2 and PO_2 tetrahedral oxide units, and at least one Group VIII metal. Exemplary suitable intermediate pore size nonzeolitic molecular sieves are set forth in European patent Application No. 158,977 which is incorporated herein by reference.

30

35

The group of intermediate pore size zeolites of the present invention include ZSM-22, ZSM-23 and ZSM-35. These catalysts are generally considered to be intermediate pore size catalysts based on the measure of their internal structure as represented by their Constraint Index.

40

Zeolites which provide highly restricted access to and egress from their internal structure have a high value for the Constraint Index, while



zeolites which provide relatively free access to the internal zeolite structure have a low value for their Constraint Index. The method for determining Constraint Index is described fully in U.S. Patent No. 4,016,218 which is incorporated herein by reference.

Those zeolites exhibiting a Constraint Index value within the range of from about 1 to about 12 are considered to be intermediate pore size zeolites. Zeolites which are considered to be in this range include ZSM-5, ZSM-11, etc. Upon careful examination of the intermediate pore size zeolites, however, it has been found that not all of them are efficient as a catalyst for isomerization of a paraffin-containing feedstock which are high in $C_{20}+$ paraffins, and preferably which are high in $C_{22}+$ paraffins. In particular, it has been found that the group including ZSM-22, ZSM-23 and ZSM-35 used in combination with Group VIII metals can provide a means whereby a hydrocarbon feedstock having a paraffinic content with molecules of 20 carbon atoms or more undergoes unexpectedly efficient isomerization without destroying the ultimate yield of the feedstock.

It is known to use prior art techniques for formation of a great variety of synthetic aluminosilicates. These aluminosilicates have come to be designated by letter or other convenient symbols. One of the zeolites of the present invention, ZSM-22, is a highly siliceous material which includes crystalline three-dimensional continuous framework silicon containing structures or crystals which result



when all the oxygen atoms in the tetrahedra are mutually shared between tetrahedral atoms of silicon or aluminum, and which can exist with a network of mostly SiO_2 , i.e., exclusive of any intracrystalline cations. The description of ZSM-22 is set forth in full in U.S. Patent No. 4,556,477, U.S. Patent No. 4,481,177 and European Patent Application No. 102,716 the contents of which are incorporated herein by reference.

As indicated in U.S. Patent No. 4,566,477 the crystalline material ZSM-22 has been designated with a characteristic X-ray diffraction pattern as set forth in Table VII.

15

TABLE VII

Most Significant Lines of ZSM-22

	<u>Interplanar d-spacings (Å)</u>	<u>Relative Intensity(I/I₀)</u>
20	10.9 ± 0.2	M - VS
	8.7 ± 0.16	W
	6.94 ± 0.10	W - M
	5.40 ± 0.08	W
25	4.58 ± 0.07	W
	4.36 ± 0.07	VS
	3.68 ± 0.05	VS
	3.62 ± 0.05	S - VS
	3.47 ± 0.04	M - S
30	3.30 ± 0.04	W
	2.74 ± 0.02	W
	2.52 ± 0.02	W

35

It should be understood that the X-ray diffraction pattern of Table VII is characteristic of all the species of ZSM-22 zeolite compositions. Ion exchange of the alkali metal cations with other ions results in a zeolite which reveals substantially the same X-ray diffraction pattern.



with some minor shifts in interplanar spacing and variation in relative intensity.

5 Furthermore, the original cations of the as-synthesized ZSM-22 can be replaced at least in part by other ions using conventional ion exchange techniques. It may be necessary to precalcine the ZSM-22 zeolite crystals prior to ion exchange. In accordance with the present invention, the replacement ions are those taken from Group VIII of the Periodic Table, especially platinum, 10 palladium, iridium, osmium, rhodium and ruthenium.

ZSM-22 freely sorbs normal hexane and has a pore dimension greater than about 4 Å. In addition, the structure of the zeolite provides 15 constrained access to larger molecules. The Constraint Index as determined by the procedure set forth in U.S. Patent No. 4,016,246 for ZSM-22 has been determined to be from about 2.5 to about 3.0.

20 Another zeolite which can be used with the present invention is the synthetic crystalline aluminosilicate referred to as ZSM-23, disclosed in U.S. Patent No. 4,076,842, the contents of which are incorporated herein by reference. The 25 ZSM-23 composition has a characteristic X-ray diffraction pattern as set forth herein in Table VIII.

Other molecular sieves which can be used with the present invention include, for example, 30 Theta-1, as described in U.S. Patents 4,533,649 and 4,836,910, both of which are incorporated in their entireties by reference, Nu-10, as described in European Patent Application 065,400 which is incorporated in its entirety by reference and SSZ-



20 as described in U.S. Patent 4,483,835 which is incorporated in its entirety by reference.

TABLE VIII

	d(Å)	I/I ₀
5	11.2 ± 0.23	M
	10.1 ± 0.20	W
	7.87 ± 0.15	W
	5.59 ± 0.10	W
10	5.44 ± 0.10	W
	4.90 ± 0.10	W
	4.53 ± 0.10	S
	3.90 ± 0.08	VS
	3.72 ± 0.08	VS
15	3.62 ± 0.07	VS
	3.54 ± 0.07	M
	3.44 ± 0.07	S
	3.36 ± 0.07	W
	3.16 ± 0.07	W
20	3.05 ± 0.06	W
	2.99 ± 0.06	W
	2.85 ± 0.06	W
	2.54 ± 0.05	M
	2.47 ± 0.05	W
25	2.40 ± 0.05	W
	2.34 ± 0.05	W


The ZSM-23 composition can also be defined in terms of mole ratios of oxides in the anhydrous state as follows:



wherein M is at least 1 cation and n is the valence thereof. As in the ZSM-22, the original cations of as-synthesized ZSM-23 can be replaced in accordance with techniques well-known in the art, at least in part by ionic exchange with other cations. In the present invention these cations include the Group VIII metals as set forth hereinbefore.



The third intermediate pore size zeolite which has been found to be successful in the present invention is ZSM-35, which is disclosed in U.S. Patent No. 4,016,245, the contents of which are incorporated herein by reference. The synthetic crystalline aluminosilicate known as ZSM-35, has a characteristic X-ray diffraction pattern which is set forth in U.S. Patent No. 4,016,245. ZSM-35 has a composition which can be defined in terms of mole ratio of oxides in the anhydrous state as follows:



wherein R is organic nitrogen-containing cation derived from ethylenediamine or pyrrolidine and M is an alkali metal cation. The original cations of the as-synthesized ZSM-35 can be removed using techniques well known in the art which includes ion exchange with other cations. In the present invention the cation exchange is used to replace the as-synthesized cations with the Group VIII metals set forth herein. It has been observed that the X-ray diffraction pattern of ZSM-35 is similar to that of natural ferrierite with a notable exception being that natural ferrierite patterns exhibit a significant line at 1.33 Å.

X-ray crystallography of SAPO-11, SAPO-31, SAPO-41, ZSM-22, ZSM-23 and ZSM-35 shows these molecular sieves to have the following major and minor axes: SAPO-11, major 6.7 Å, minor 4.4 Å; (Benett, J. M., et al, Zeolites, 1, 160(87)), SAPO-31 and SAPO-41, believed to be slightly larger than SAPO-11, ZSM-22, major 5.5 Å, minor 4.5 Å (Kokotailo, G. T., et al, Zeolites, 5, 349(85)); ZSM-23, major 5.6 Å, minor 4.5 Å; ZSM-35, major



5.4 Å, minor 4.2 Å (Meier, W. M. and Olsen, D. H., Atlas of Zeolite Structure Types, Butterworths, 1987).

5 The intermediate pore size molecular sieve
is used in admixture with at least one Group VIII
metal. Preferably the Group VIII metal is
selected from the group consisting of at least one
of platinum and palladium and optionally, other
catalytically active metals such as molybdenum,
10 nickel, vanadium, cobalt, tungsten, zinc and
mixtures thereof. Most preferably, the Group VIII
metal is selected from the group consisting of at
least one of platinum and palladium. The amount
of metal ranges from about 0.01% to about 10% by
15 weight of the molecular sieve, preferably from
about 0.2% to about 5% by weight of the molecular
sieve. The techniques of introducing
catalytically active metals into a molecular sieve
are disclosed in the literature, and preexisting
20 metal incorporation techniques and treatment of
the molecular sieve to form an active catalyst
such as ion exchange, impregnation or occlusion
during sieve preparation are suitable for use in
the present process. Such techniques are
25 disclosed in U.S. Patent Nos. 3,236,761;
3,226,339; 3,236,762; 3,620,960; 3,373,109;
4,202,996; 4,440,781 and 4,710,485 which are
incorporated herein by reference.

30 The term "metal" or "active metal" as used
herein means one or more metals in the elemental
state or in some form such as sulfide, oxide and
mixtures thereof. Regardless of the state in
which the metallic component actually exists, the



concentrations are computed as if they existed in the elemental state.

5 The catalyst may also contain metals which reduce the number of strong acid sites on the catalyst and thereby lower the selectivity for cracking versus isomerization. Especially preferred are the Group IIA metals such as magnesium and calcium.

10 It is preferred that relatively small crystal size catalyst be utilized in practicing the invention. Suitably, the average crystal size is no greater than about 10μ , preferably no more than about 5μ , more preferably no more than about 1μ and still more preferably no more than about
15 0.5μ .

Strong acidity may also be reduced by introducing nitrogen compounds, e.g., NH_3 or organic nitrogen compounds, into the feed; however, the total nitrogen content should be less
20 than 50 ppm, preferably less than 10 ppm. The physical form of the catalyst depends on the type of catalytic reactor being employed and may be in the form of a granule or powder, and is desirably compacted into a more readily usable form (e.g.,
25 larger agglomerates), usually with a silica or alumina binder for fluidized bed reaction, or pills, prills, spheres, extrudates, or other shapes of controlled size to accord adequate catalyst-reactant contact. The catalyst may be
30 employed either as a fluidized catalyst, or in a fixed or moving bed, and in one or more reaction stages.

The catalytic isomerization step of the invention may be conducted by contacting the feed



with a fixed stationary bed of catalyst, with a fixed fluidized bed, or with a transport bed. A simple and therefore preferred configuration is a trickle-bed operation in which the feed is allowed to trickle through a stationary fixed bed, preferably in the presence of hydrogen.

The catalytic isomerization conditions employed depend on the feed used and the desired pour point. Generally, the temperature is from about 200°C to about 475°C, preferably from about 250°C and to about 450°C. The pressure is typically from about 15 psig and to about 2000 psig, preferably from about 50 to about 1000 psig, more preferably from about 100 psig to about 600 psig. The process of the invention is preferably carried out at low pressure. The liquid hourly space velocity (LHSV) is preferably from about 0.1 to about 20, more preferably from about 0.1 to about 5, and most preferably from about 0.1 to about 1.0. Low pressure and low liquid hourly space velocity provide enhanced isomerization selectivity which results in more isomerization and less cracking of the feed thus producing an increased yield.

Hydrogen is preferably present in the reaction zone during the catalytic isomerization process. The hydrogen to feed ratio is typically from about 500 to about 30,000 SCF/bbl (standard cubic feet per barrel), preferably from about 1,000 to about 10,000 SCF/bbl. Generally, hydrogen will be separated from the product and recycled to the reaction zone.

The intermediate pore size molecular sieve used in the isomerization step provides selective



conversion of the waxy components to non-waxy components. During processing, isomerization of the paraffins occurs to reduce the pour point of the oil below that of the feed and form lube oil boiling range materials which contribute to a low pour point product having excellent viscosity index properties.

Because of the selectivity of the intermediate pore size molecular sieve used in the invention, the yield of low boiling products is reduced, thereby preserving the economic value of the feedstock.

The intermediate pore size molecular sieve catalyst can be manufactured into a wide variety of physical forms. The molecular sieves can be in the form of a powder, a granule, or a molded product, such as an extrudate having a particle size sufficient to pass through a 2-mesh (Tyler) screen and be retained on a 40-mesh (Tyler) screen. In cases wherein the catalyst is molded, such as by extrusion with a binder, the silicoaluminophosphate can be extruded before drying, or, dried or partially dried and then extruded.

The molecular sieve can be composited with other materials resistant to temperatures and other conditions employed in the isomerization process. Such matrix materials include active and inactive materials and synthetic or naturally occurring zeolites as well as inorganic materials such as clays, silica and metal oxides. The latter may be either naturally occurring or in the form of gelatinous precipitates, sols or gels including mixtures of silica and metal oxides.



Inactive materials suitably serve as diluents to control the amount of conversion in the isomerization process so that products can be obtained economically without employing other means for controlling the rate of reaction. The molecular sieve may be incorporated into naturally occurring clays, e.g., bentonite and kaolin. These materials, i.e., clays, oxides, etc., function, in part, as binders for the catalyst. It is desirable to provide a catalyst having good crush strength because in petroleum refining, the catalyst is often subjected to rough handling. This tends to break the catalyst down into powder-like materials which cause problems in processing.

15 Naturally occurring clays which can be composited with the molecular sieve include the montmorillonite and kaolin families, which families include the sub-bentonites, and the kaolins commonly known as Dixie, McNamee, Georgia and Florida clays or others in which the main mineral constituent is halloysite, kaolinite, dickite, nacrite or anauxite. Fibrous clays such as halloysite, sepiolite and attapulgite can also be use as supports. Such clays can be used in the raw state as originally mined or initially subjected to calcination, acid treatment or chemical modification.

25 In addition to the foregoing materials, the molecular sieve can be composited with porous matrix materials and mixtures of matrix materials such as silica, alumina, titania, magnesia, silica-alumina, silica-magnesia, silica-zirconia, silica-thoria, silica-beryllia, silica-titania, titania-zirconia as well as ternary compositions

30



such as silica-alumina-thoria, silica-alumina-titania, silica-alumina-magnesia and silica-magnesia-zirconia. The matrix can be in the form of a cogel.

5 The catalyst used in the process of this invention can also be composited with other zeolites such as synthetic and natural faujasites, (e.g., X and Y) erionites, and mordenites. It can also be composited with purely synthetic zeolites
10 such as those of the ZSM series. The combination of zeolites can also be composited in a porous inorganic matrix.

 It is often desirable to use mild hydrogenation referred to as hydrofinishing after
15 isomerization to produce more stable lubricating oils. Hydrofinishing is typically conducted at temperatures ranging from about 190°C to about 340°C, at pressures from about 400 psig to about 3000 psig, at space velocities (LHSV) from about
20 0.1 to about 20, and hydrogen recycle rates of from about 400 to about 1500 SCF/bbl. The hydrogenation catalyst employed must be active enough not only to hydrogenate the olefins, diolefins and color bodies within the lube oil
25 fractions, but also to reduce the aromatic content. The hydrofinishing step is beneficial in preparing an acceptably stable lubricating oil.

 Suitable hydrogenation catalysts include conventional metallic hydrogenation catalysts,
30 particularly the Group VIII metals such as cobalt, nickel, palladium and platinum. The metals are typically associated with carriers such as bauxite, alumina, silica gel, silica-alumina composites, and crystalline aluminosilicate



zeolites. Palladium is a particularly preferred hydrogenation metal. If desired, non-noble Group VIII metals can be used with molybdates. Metal oxides or sulfides can be used. Suitable catalysts are disclosed in U.S. Patent Nos. 3,852,207; 4,157,294; 3,904,513 and 4,673,487, which are incorporated herein by reference.

The high viscosity index lube oil produced by the process of the present invention can be used as a blending component to raise the viscosity index of lube oils to a higher value. Since yield decreases with increasing viscosity index in either hydrocracking or solvent refining, the use of an isomerized wax to increase the viscosity index improves yield.

The invention will be further clarified by the following examples, which are intended to be purely exemplary of the invention.

The wax content of the oil set forth in the following Examples was determined as follows:

300 g of oil was diluted 50/50 with a 4:1 mixture of methyl ethyl ketone and toluene which was cooled to -20°C in a refrigerator. The mixture was filtered through a Coors funnel at -15°C using Whatman No. 3 filter paper. The wax was removed from the filter and placed in a tared 2 liter flask. The solvent was removed on a hot plate and the wax weighed.

Example 1

SAPO-11 was prepared as follows:

472.4 g of 85% H_3PO_4 were added to 1208 g of distilled H_2O in a Teflon beaker in an ice bath. 816.8 g of aluminum isopropoxide ($Al[OC_3H_7]_3$) were



slowly added with mixing and then mixed until homogenous. Then 120 g of fumed silica (Cabosil M-5) were added with mixing. Next, 182.4 g of di-n-propylamine (Pr_2NH) were added, followed by 9.0 g of 85% H_3PO_4 . Final mixing was done using a Polytron. The mixture had a pH of 6.5 and the following composition, expressed in molar ratio of oxides:



The mixture was placed in a Teflon bottle in a stainless steel pressure vessel and heated for 5 days at 200°C with no stirring and autogenous pressure. The supernatant liquid was removed and the product was filtered, washed with water, dried overnight at 121°C, and calcined in air for 8 hours at 566°C. The average crystallite size was less than 0.5 micron. The product was identified as SAPO-11 by X-ray diffraction analysis. Elemental analysis of the calcined sieve showed it to have the following anhydrous molar composition:



The sieve was bound with 35% Catapal alumina and made into 1/10 inch extrudate. The extrudate was dried 3 hours at 121°C, calcined in air for 4 hours at 454°C, then impregnated with 0.5% Pt (as $\text{Pt}(\text{NH}_3)_4\text{Cl}_2 \cdot \text{H}_2\text{O}$) by the pore-fill method. It was then dried for 2 hours at 93°C, 2 hours at 149°C, and calcined in air for 8 hours at 454°C. For the following examples, the catalyst was crushed and screened to 24-42 mesh.

This Sheet Has Been Replaced



Example 2

5 The catalyst of Example 1 was used to
isomerize a 800°F+ hydrocracked waxy vacuum gas
oil (Table IX) at 2200 psig, 1 LHSV, and 8 M
SCF/bbl once-through H₂. The catalyst was also run
at 400 psig. The results are set forth in Table X
and demonstrate that high lube yield at very low
pour point is achieved by the present process.
The data also evidences the substantial yield
10 benefit from operating at a lower reactor
pressure. Lube yield is

This Sheet Has Been Replaced



TABLE IX

800°F+ Hydrocracked Waxy VGO

5	Gravity, °API	40.0
	Wax, Wt. %	25.0
	Pour Point, °C	+39
	Viscosity at 100°C, cSt	4.585
	VI	152
10	Simulated Distillation, LV%, °F	
	ST/5	749/769
	10/30	778/803
	50	826
15	70/90	857/920
	95/99	956/1016
	Hydrocarbon Distribution, LV%	
20	Paraffins	54
	Naphthenes	29
	Aromatics	17
25	Carbon Type Distribution, ndM, (D3238-85), wt%	
	Paraffinic	92
	Naphthenic	8
	Aromatic	0
30		

This Sheet Has Been Replaced



TABLE X

Isomerizing 800°F+ Hydrocracked Waxy VGO at 1 LHSV and 8 M SCF/bbl H₂ (Pt/SAPO-11)

Pressure, psig	Catalyst Temperature, °F	Yield, Wt. %	Pour/Cloud, °C	Viscosity at 40/100°C, cSt	VI
5	2200	74.5	-12/-6	18.87/4.305	139
	670	63.3	-24/-19	19.08/4.301	136
400	710	44.9	-48/-47	19.56/4.294	129
	650	69.7	-45/-28	19.43/4.349	136
	670	55.0	<-63/<-63	19.64/4.304	128

This Sheet Has Been Replaced



defined as $\frac{g(\text{product})}{g(\text{feed})} \times 100\%$ where the product

has the same 5 LV% boiling point as the feed.

5

Example 3

The catalyst of Example 1 was used to isomerize a slack wax derived from a 900°F+ hydrocracked vacuum gas oil (Table XI).

10 Conditions were 160 psig reactor pressure, 0.3 LHSV, and 8 M SCF/bbl once-through H₂. At a catalyst temperature of 680°F, a -27°C pour point oil of 7.1 cSt viscosity at 100°C and 149 viscosity index was produced. Pour point
15 reduction could be increased by raising the catalyst temperature. Figure 3 shows a plot of 700°F+ lube yield versus pour point, where 700°F+ lube yield is defined as:

20
$$\left(\frac{g_{700^\circ\text{F}+}(\text{feed}) - g_{700^\circ\text{F}+}(\text{product})}{g_{700^\circ\text{F}+}(\text{feed})} \right) \times 100\%$$

Figure 4 shows a plot of viscosity index versus pour point.

25 A -30°C pour point oil prepared in this example was subsequently hydrofinished over a 0.5% Pd on silica-alumina catalyst at 500°F, 2200 psig,

This Sheet Has Been Replaced



TABLE XI

5 Slack Wax From 900°F+ Hydrocracked VGO

	Gravity, °API	23.2
	Sulfur, ppm	2.2
	Nitrogen, ppm	<1
10	Pour Point, °C	+63
	Viscosity, cSt, 100°C	8.30
	70°C	16.55
	Oil in Wax, Wt%	14.5

15

Simulated Distillation, LV%, °F

	ST/5	802/860
	10/30	885/933
20	50	960
	70/90	995/1038
	95/99	1063/1118

This Sheet Has Been Replaced



0.25 LHSV, and 8 M SCF/bbl H_2 . Inspections of the hydrofinished oil are given in Table XVI.

Example 4

5 The catalyst of Example 1 was used to
isomerize a deoiled slack wax derived from a
700-800°F solvent refined vacuum gas oil (Table
XII). Conditions were 160 psig, 0.3 LHSV, and 8 M
SCF/bbl once-through H_2 . The results are set forth
10 in Table XIII.

Example 5

 The catalyst of Example 1 was used to
isomerize a deoiled slack wax derived from a
15 800-900°F solvent refined vacuum gas oil (Table
XIV). Conditions were the same as in Example 4.
The results are set forth in Table XV.

This Sheet Has Been Replaced



TABLE XII

5	Deoiled Slack Wax from <u>700-800°F Solvent Refined VGO</u>	
	Gravity, °API	41.0
	Pour Point, °C	+51
10	Viscosity, cSt, 100°C	3.141
	Sulfur, ppm	383
	Nitrogen, ppm	8.9
	N-paraffins, Wt.%	77.2
15	Simulated Distillation, LV%, °F	
	ST/5	617/674
	10/30	695/732
	50	760
20	70/90	795/842
	95/99	861/903

25

This Sheet Has Been Replaced



This Sheet Has Been Replaced



-43-

TABLE XIII

Isomerizing Deoiled Slack Wax from 700-800°F

Solvent Refined Oil at 160 psig. 0.3 LHSV and 8 M SCF/bbl H₂ over Pt/SAPO-11

5	Catalyst	650°F+	Pour/Cloud,	Viscosity at	
	Temperature, °F	Yield, Wt. %	°C	40/100°C, cst	VI
	640	72.0	-18/-5	9.563/2.817	151
10	650	77.1	-15/-2	9.883/2.889	154
	655	81.1	-15/0	10.10/2.918	150

TABLE XIV

Deoiled Slack Wax from

5 800-900°F Solvent Refined VGO

	Gravity, °API	40.2
	Pour Point, °C	+57
	Viscosity, cSt, 100°C	4.317
10	70°C	7.554
	Sulfur, ppm	122
	Nitrogen, ppm	3.4
	N-paraffins, Wt.%	57.1

15

Simulated Distillation, LV%, °F

	ST/5	565/714
	10/30	738/808
20	50	843
	70/90	873/909
	95/99	928/965

This Sheet Has Been Replaced



TABLE XV

Isomerizing Decoiled Slack Wax from 800-900°F
Solvent Refined Oil at 160 psig. 0.3 LHSV and 8 M SCF/bbl H₂ over Pt/SAPO-11

5	Catalyst	700°F+ Yield, Wt. %	Pour/Cloud, °C	Viscosity at 40/100°C, cSt	VI
10	655	90.4	+ 6/+17	15.44/4.017	169
	670	85.3	- 9/+3	15.58/3.938	155
	685	79.5	-24/-6	16.16/3.997	152
	700	77.4	-27/-9	16.73/4.050	147

This Sheet Has Been Replaced



Example 6

ZSM-22 was prepared as follows:

5 The following reactants were combined to
produce a gel: N,N'-dimethyl imidazolium
hydroxide, Ludox AS-30 silica sol, aluminum
sulfate, sodium hydroxide, and water in the
ratios:

10 $\text{SiO}_2/\text{Al}_2\text{O}_3 = 100$
 $\text{H}_2\text{O}/\text{SiO}_2 = 30$
 template/ $\text{SiO}_2 = 0.15$
 $\text{NaOH}/\text{SiO}_2 = 0.10$
 $\text{OH}^-/\text{SiO}_2 = 0.25$

15

The reaction was run at autogenous pressure in a
stainless steel autoclave at 150°C for 6 days.
The product was filtered, calcinated to 1000°F in
air, ion-exchanged four times with excess NH_4NO_3 ,
20 and calcined again to 1000°F. The product was
identified by X-ray diffraction analysis as ZSM-
22. The $\text{SiO}_2/\text{Al}_2\text{O}_3$ mole ratio was about 100. The
sieve was bound with 35% Catapal and the extrudate
impregnated

This Sheet Has Been Replaced



TABLE XVI

Hydrofinished Oil from Example 3

5	Color	< 1.0
	Gravity, °API	37.0
	Aniline Pt, °F	259.6
	Pour Point, °C	-30
10	Cloud Point, °C	-7
	Sulfur, ppm	0.4
	Nitrogen, ppm	<1
	Viscosity, cSt	
	40°C	39.33
15	100°C	7.073
	VI	143
	Oxidator BN, hr	40.9
	Carbon Type Distribution, ndM, Wt. %	
20	Paraffinic	80.27
	Naphthenic	19.73
	Aromatic	0.00
	Simulated Distillation, LV%, °F	
25	ST/5	630/702
	10/30	749/862
	50	916
	70/90	957/1005
30	95/99	1030/1084

This Sheet Has Been Replaced



with 1% Pt and calcined in the same manner as the catalyst of Example 1.

Example 7

5 The catalyst of Example 6 was used to isomerize the slack wax of Table XI at 500 psig, 0.3 LHSV, and 8M SCF/bbl once-through H₂. The results are set forth in Table XVII.

10 Example 8

 The catalyst of Example 6 was mixed with a 10-fold excess of 5 wt.% Mg CO₃ in water, filtered, dried for 18 hours at 93°C, and calcined for 12 hours at 538°C. The Mg content was 22.7 wt.%.
15 This catalyst was used to isomerize the slack wax of Table XI at 0.3 LHSV and 8 MSCF/bbl H₂, both at 500 psig and 160 psig. The results are set forth in Table XVIII, showing a higher yield for this catalyst than

This Sheet Has Been Replaced



TABLE XVII

Isomerizing Slack Wax from 900°F+ Hydrocracked VGO
at 500 psig, 0.3 LHSV and 8 M SCF/bbl H₂ over Pt/ZSM-22

5	Catalyst Temperature, °F	Yield, Wt. %	700°F+ Yield, Wt. %	Pour/Cloud, °C	Viscosity at		VI
					40/100°C, cst		
10	600		53.4	-3/+9	59.64/9.363		138
	620		51.3	-18/<-63	61.50/9.442		134
	640		52.4	-30/<-63	57.97/8.971		133

This Sheet Has Been Replaced



This Sheet Has Been Replaced



TABLE XVIII

Isomerizing Slack Wax from 900°F+ Hydrocracked
VGO at 0.3 LHSV and 8 M SCF/bbl H₂ over Pt-Mg/ZSM-22

Pressure psig	Catalyst Temperature, °F	700°F+ Yield, Wt. %	Pour/Cloud, °C	Viscosity at 40/100°C, cSt	VI
500	645	63.3	-18/+2	55.09/8.990	143
	660	61.8	-24/<-63	54.08/8.835	142
160	640	76.1	-27/-4	45.55/8.003	149
	660	69.5	-39/-8	46.10/7.886	142

that of Example 6 without Mg. The beneficial effect of low pressure on yield is also shown.

Example 9

5 The catalyst of Example 6 was used to isomerize a deoiled slack wax derived from a 900°F+ solvent refined vacuum gas oil (Table XIX). Conditions were the same as Example 7. The results are set forth in Table XX.

10 Example 10

 The catalyst of Example 8 was used to isomerize a slack wax (not deoiled) derived from a 700-800°F solvent refined vacuum gas oil (the same used to prepare the feed of Table XII).
15 Inspections of the feed are given in Table XXI. Isomerization conditions were the same as in Example 7. The results are set forth in Table XXII.

20 Example 11

 ZSM-23 was prepared as in U.S. Patent No. 4,076,842, and identified as such by X-ray diffraction analysis after calcination at 1000°F in air. It was exchanged four times with excess
25 NH₄NO₃ and calcined again at 1000°F. The sieve was impregnated with 0.5% Pt and calcined in the same manner as the catalyst of Example 1.

This Sheet Has Been Replaced



TABLE XIX

Decoiled Slack Wax from 900°F+ Solvent Refined VGO

5	Gravity, °API	36.7
	N, ppm	12
	S, ppm	326
	Viscosity, cSt, 100°C	7.307
10	70°C	14.03

Simulated Distillation, LV%, °F

15	ST/5	47/678
	10/30	808/899
	50	931
	70/90	965/1011
	95/99	1035/1090
20		

This Sheet Has Been Replaced



This Sheet Has Been Replaced



-53-

TABLE XX

Isomerizing Decilled Slack Wax from 900°F+ Solvent Refined
Oil at 0.3 LHSV, 500 psig, and 8 M SCF/bbl H₂ over Pt/ZSM-22

5	Catalyst Temperature, °F	700°F+ Yield, Wt. %	Pour/Cloud, °C	Viscosity at		VI
				40/100°C, cSt		
10	665	54.9	-10/-6	44.67/7.928		150
	680	54.9	-24/<-63	48.11/8.170		143
	700	51.0	-33/-4	41.30/7.442		148

TABLE XXI

5	<u>Slack Wax From 700-800°F+ Solvent Refined VGO</u>		
	Gravity, °API		40.0
	N, ppm		20
	S, ppm		300
10	Viscosity, 100°C, cSt		3.246
	70°C		5.482
	Pour Point, °C		+42
15	Simulated Distillation, LV%, °F		
	ST/5		575/670
	10/30		685/723
	50		759
20	70/90		794/842
	95/99		861/902

This Sheet Has Been Replaced



TABLE XXII

Isomerizing Slack Wax from 700-800°F Solvent Refined
VGO at 0.3 LHSV, 500 psig, and 8 M SCF/bbl H₂ over Pt-Mg/ZSM-22

5	Catalyst Temperature, °F	700°F+ Yield, Wt. %	Pour/Cloud, °C	Viscosity at 40/100°C, cst	VI
10	640	49.1	-9/-6	14.55/3.893	174
	700	45.1	-24/<-63	14.66/3.594	130
	720	42.8	-33/<-63	14.78/3.893	169

This Sheet Has Been Replaced



Example 12

5 The catalyst of Example 11 was used to
isomerize the feed of Table XI at 0.3 LHSV, 500
psig, and 8 MSCF/bbl H_2 . The results are set forth
in Table XXIII.

Example 13

10 The catalyst of Example 8 was used to
isomerize a C_{30} + normal alphaolefin wax (Table
XXIV) at 0.3 LHSV and 8 MSCF/bbl H_2 , both at 500
psig and 300 psig. The results are set forth in
Table XXV.

This Sheet Has Been Replaced



TABLE XXIII

Isomerizing Slack Wax from 900°F+ Hydrocracked VGO
at 500 psig, 0.3 LHSV, and 8 M SCF/bbl H₂ over Pt/ZSM-23

S	Catalyst	700°F+	Pour/Cloud, °C	Viscosity at		VI
	Temperature, °F	Yield, Wt. %		40/100°C. cst		
10	610	50.3	+9/+10	48.87/7.887		130
	630	43.3	-27/-14	47.53/7.445		120

This Sheet Has Been Replaced



TABLE XXIV

C30+ Normal Alphaolefin Wax

5

Pour Point, °C +72
Viscosity, 100°C, cSt 7.478

10

Simulated Distillation, LV%, °F

ST/5	802/807
10/30	809/844
50	893
70/90	931/1026
95/99	1087/1139

15

This Sheet Has Been Replaced



TABLE XXV

Isomerizing C₃₀+ Normal Alphaolefin Wax
at 0.3 LHSV, and 8 M SCF/bbl H₂ over Pt-Mg/ZSM-22

	Pressure psig	Catalyst Temperature, °F	700°F+ Yield, Wt. %	Pour/Cloud, °C	Viscosity at 40/100°C, cSt	VI
5	500	685	44.4	-48/-10	51.88/9.383	166
		700	41.9	-57/-26	54.42/9.467	158
	300	640	52.8	-36/-4	47.60/8.998	173
		660	47.9	-51/<-63	50.87/9.192	165
10		685	46.5	<-63/<-63	51.67/9.063	157

This Sheet Has Been Replaced



5 While the invention has been described in
connection with specific embodiments thereof, it
will be understood that it is capable of further
modification, and this application is intended to
cover any variations, uses, or adaptations of the
invention following, in general, the principles of
the invention and including such departures from
the present disclosure as come within known or
10 customary practice in the art to which the
invention pertains and as may be applied to the
essential features hereinbefore set forth, and as
fall within the scope of the invention and the
limits of the appended claims.

This Sheet Has Been Replaced





Claims

That Which Is Claimed Is:

1. A process for producing lube oil comprising isomerizing a waxy feed 1) having greater than about 50% wax and/or 2) exhibiting a high pour point above about 0°C and having greater than about 70% paraffinic carbon over a catalyst comprising a molecular sieve having generally oval 1-D pores having a minor axis between about 4.2 Å and about 4.8 Å and a major axis between about 5.4 Å and about 7.0 Å and at least one Group VIII metal at a pressure of from about 15 psig to about 2000 psig.
2. The process of claim 1, wherein said waxy feed contains at least about 80% wax.
3. The process of claim 1, wherein said waxy feed contains at least about 90% wax.
4. The process of claim 1, wherein said waxy feed contains at least about 80% paraffinic carbon.
5. The process of claim 1, wherein said waxy feed contains at least about 90% paraffinic carbon.

This Sheet Has Been Replaced





-62-

5 6. The process of claim 1, wherein said waxy feed is selected from the group consisting of gas oil, lubricating oil stock, synthetic oil, focts oil, slack wax, deoiled wax, normal alphaolefin wax and microcrystalline wax.

5 7. The process of claim 1, wherein said molecular sieve is selected from the group consisting of SAPO-11, SAPO-31, SAPO-41, ZSM-22, ZSM-23, and ZSM-35 and said metal compound is selected from the group consisting of at least one of platinum and palladium.

8. The process of claim 7 wherein said molecular sieve further comprises a platinum hydrogenation component.

9. The process of claim 1, wherein said molecular sieve is a SAPO-11 crystalline silicoaluminophosphate.

10. The process of claim 9 wherein said molecular sieve further comprises a platinum hydrogenation component.

11. The process of claim 1, wherein isomerization is carried out at a temperature of from about 200°C to about 475°C and a pressure of from about 15 to about 2000 psig.

12. The process of claim 11, wherein said pressure is from about 50 to about 1000 psig.

This Sheet Has Been Replaced





13. The process of claim 11, wherein the temperature is from about 250°C to about 450°C and the pressure is from about 100 psig to about 600 psig.

14. The process of claim 1, wherein the liquid hourly space velocity during isomerization is from about 0.1 to about 20.

15. The process of claim 14, wherein the liquid hourly space velocity is from about 0.1 to about 5.

16. The process of claim 1, wherein isomerization is carried out in the presence of hydrogen.

17. The process of claim 1, further comprising hydrofinishing the isomerized lube oil.

18. The process of claim 1, wherein hydrofinishing is carried out at a temperature of from about 190°C to about 340°C and a pressure of from about 400 psig to about 3000 psig.

19. The process of claim 18, wherein hydrofinishing is carried out in the presence of a metallic hydrogenation catalyst.

20. The process of claim 1, wherein said waxy feed has an organic nitrogen content of less than about 50 ppmw.





-64-

21. The process of claim 20, wherein said organic nitrogen content is less than about 10 ppmw.

22. The process of claim 1, wherein the waxy feed comprises $C_{20}+$ paraffins and boils above about 230°C.

23. The process of claim 22, wherein the waxy feed boils above about 315°C.

24. A lube oil prepared by the process of claim 1.

25. A lube oil prepared by the process of claim 1 having a viscosity index of from about 120 to about 180 and a pour point of from less than about -63°C to about -9°C.

26. The lube oil of claim 25, wherein the viscosity index is at least about 140 and the pour point is no greater than about -12°C.

27. The lube oil of claim 25, wherein the viscosity index is at least about 120 and the pour point is no greater than about -40°C.

28. The process of claim 1, wherein said molecular sieve is a ZSM-22.

29. The process of claim 28, wherein said molecular sieve further comprises a platinum hydrogenation component.

This Sheet Has Been Replaced





30. The process of claim 1, wherein said catalyst contains a Group IIA metal.

5 31. A process for producing oil comprising isomerizing a waxy feed 1) having greater than about 50% wax and/or 2) exhibiting a high pour point above about 0°C and having greater than about 70% paraffinic carbon over a catalyst comprising (a) an intermediate pore size nonzeolitic molecular sieve containing AlO_2 and PO_2 tetrahedral oxide units and (b) at least one Group VIII metal at a pressure of from about 15 psig to 10 about 2000 psig.

32. The process of claim 31, wherein said waxy feed contains at least about 80% wax.

33. The process of claim 31, wherein said waxy feed contains at least about 80% paraffinic carbon.

5 34. The process of claim 31, wherein said waxy feed is selected from the group consisting of gas oil stock, lubricating oil stock, synthetic oil, foots oil, slack wax, deoiled wax, normal alphaolefin wax and microcrystalline wax.

35. The process of claim 31, wherein the liquid hourly space velocity during isomerization is from about 0.1 to about 20.

36. The process of claim 31, further comprising hydrofinishing the isomerized lube oil.

This Sheet Has Been Replaced





-66-

37. A lube oil prepared by the process of claim 31.

38. A lube oil having a pour point below about -24°C and a viscosity index above 125.

39. A lube oil as set forth in claim 38 having a viscosity index of from about 125 to about 180 and a pour point of from about -63°C to -24°C .

40. The lube oil of claim 39, wherein the viscosity index is at least about 130.

41. The lube oil of claim 38, wherein the viscosity index is at least about 140 and the pour point is no greater than about -30°C .

42. The lube oil of claim 41, wherein the pour point is no greater than about -40°C .

This Sheet Has Been Replaced.



WAX ISOMERIZATION USING
CATALYST OF SPECIFIC PORE GEOMETRY

5

Abstract Of The Disclosure

10

15

The present invention relates to a process for producing a lube oil having a low pour point and excellent viscosity and viscosity index comprising isomerizing a waxy feed over a catalyst comprising a molecular sieve having generally oval 1-D pores having a minor axis between about 4.2 Å and about 4.8 Å and a major axis between about 5.4 Å and about 7.0 Å and at least one group VIII metal. SAPO-11, SAPO-31, SAPO-41, ZSM-22, ZSM-23 and ZSM-35 are examples of useful catalysts.

This Sheet Has Been Replaced





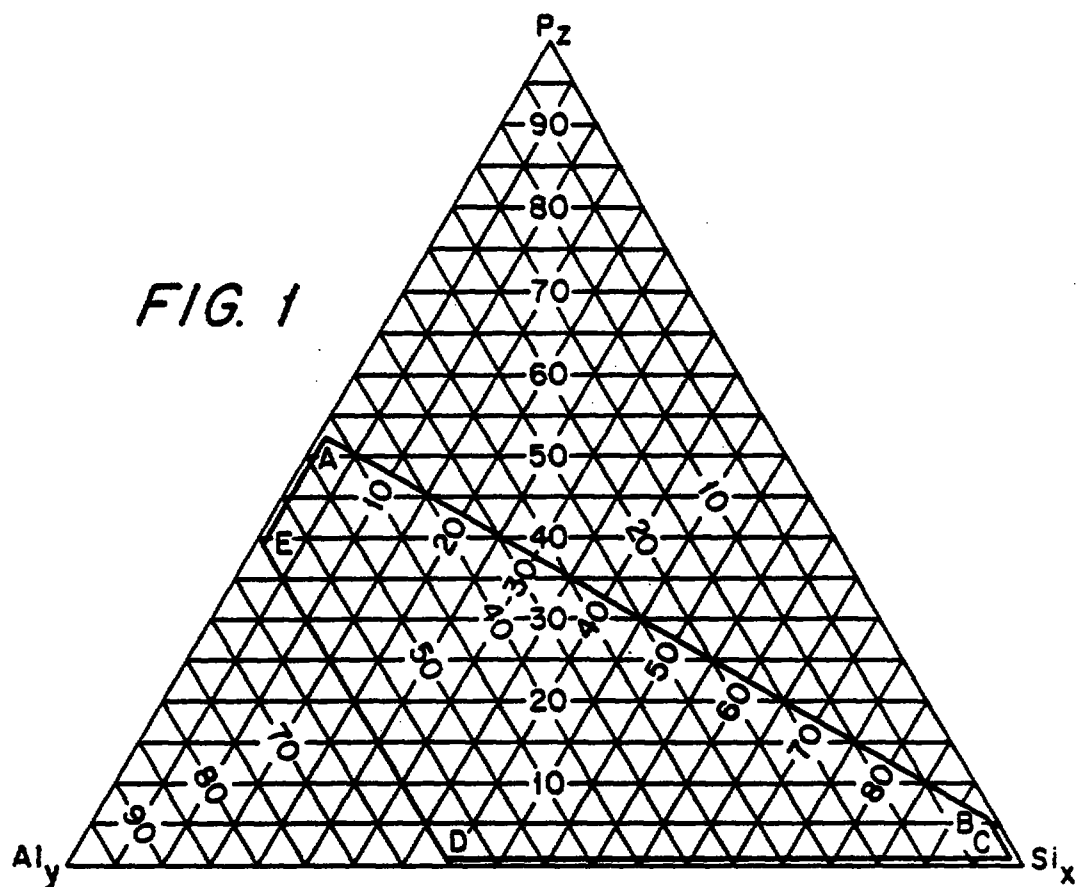


FIG. 3

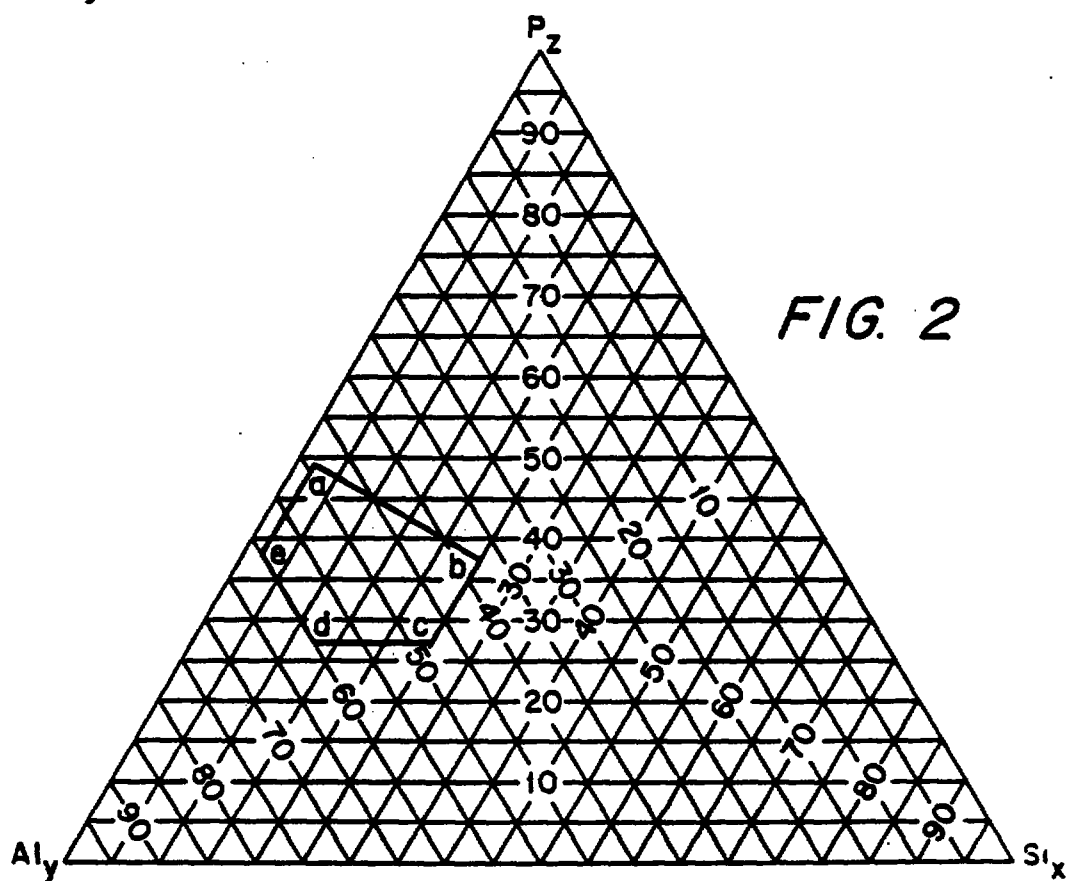

This Sheet Has Been Replaced

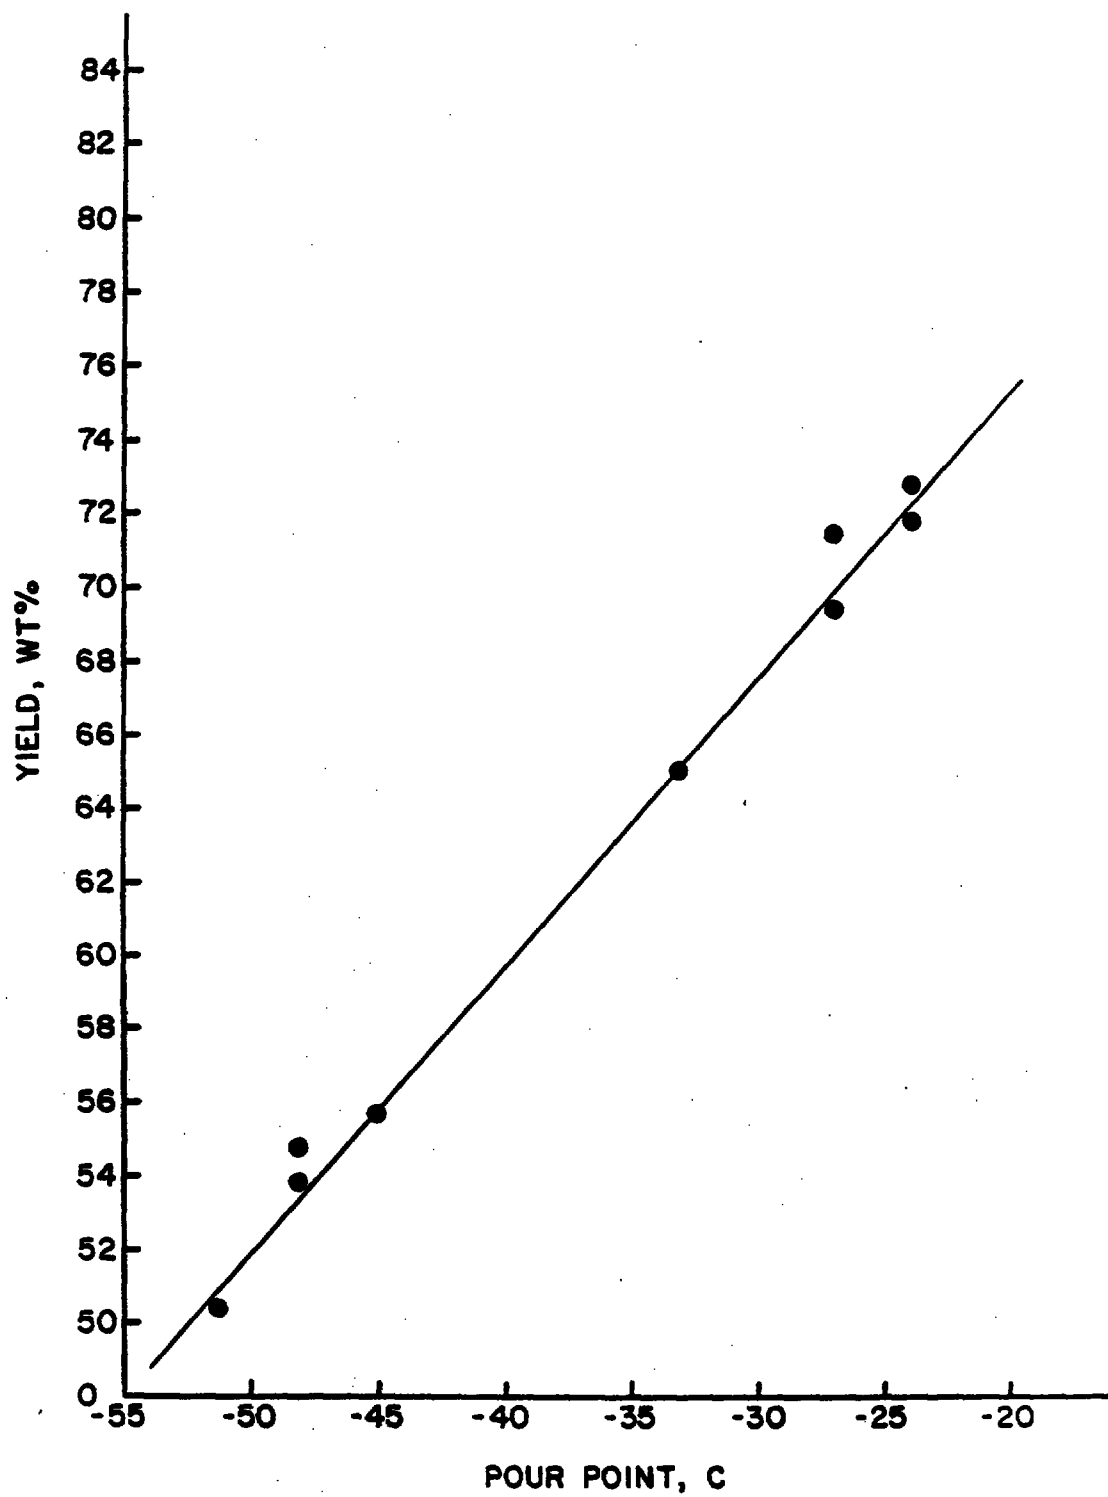

-1-

REPLACEMENT SHEETS		95
✓ Description :	pages 1. to page 60	
✓ Claim(s) :	pages 61. to page 66	
✓ Drawing(s) :	pages 67. to page 74	
✓ Abstract :	pages 67. to page 67	
DATE OF RECEIPT		30/10/95

WAX ISOMERIZATION USING CATALYST OF SPECIFIC PORE GEOMETRY

Cross-Reference

This application is a continuation-in-part of co-pending application Serial No. 07/311,969, filed February 17, 1989.

Field Of The Invention

The present invention relates to a process for isomerizing a waxy feed, including petroleum waxes, over a catalyst having a particular pore geometry and including at least one Group VIII metal to produce a lube oil having a low pour point and excellent viscosity and viscosity index properties.

Background Of The Invention

High-quality lubricating oils are critical for the operation of modern machinery and automobiles. Unfortunately, the supply of natural crude oils having good lubricating properties is not adequate for present demands. Due to uncertainties in world crude oil supplies, high-quality lubricating oils must be produced from ordinary crude feedstocks and can even be produced from paraffinic synthetic polymers. Numerous processes have been proposed for producing lubricating oils that can be converted into other products by upgrading the ordinary and low-quality stocks.

It is desirable to upgrade a crude fraction otherwise unsuitable for lubricant manufacture into one from which good yields of lube oils can

This is the replacement sheet

Date: 30 OCT 1996

8-5225030

be obtained. Dewaxing is required when highly paraffinic oils are to be used in products which need to remain mobile at low temperatures, e.g., lubricating oils, heating oils and jet fuels. The higher molecular weight straight chain normal and slightly branched paraffins which are present in oils of this kind are waxes which cause high pour points and high cloud points in the oils. If adequately low pour points are to be obtained, these waxes must be wholly or partly removed. In the past, various solvent removal techniques were used such as propane dewaxing and MEK dewaxing but these techniques are costly and time consuming. Catalytic dewaxing processes are more economical and achieve this end by selectively cracking the longer chain n-paraffins to produce lower molecular weight products, some of which may be removed by distillation.

Because of their selectivity, prior art dewaxing catalysts generally comprise an aluminosilicate zeolite having a pore size which admits the straight chain n-paraffins either alone or with only slightly branched chain paraffins (sometimes referred to herein as waxes), but which excludes more highly branched materials, cycloaliphatics and aromatics. Zeolites such as ZSM-5, ZSM-11, ZSM-12, ZSM-23, ZSM-35 and ZSM-38 have been proposed for this purpose in dewaxing processes and are described in U.S. Patents Nos. 3,894,938; 4,176,050; 4,181,598; 4,222,855; 4,229,282 and 4,247,388. Such processes as are set forth in the above-mentioned patents are used to accomplish dewaxing on feeds which contain relatively low amounts of waxes, generally well

This is the replacement sheet

Date: 30 OCT 1996

below 50%, and they operate by selectively cracking the waxes. These processes are not readily adapted for treating high wax content feeds since, due to the large amount of cracking which occurs, such waxes would tend to be cracked to provide very low molecular weight products.

Since dewaxing processes of this kind function by means of cracking reactions, a number of useful products become degraded to lower molecular weight materials. For example, waxy paraffins may be cracked to butane, propane, ethane and methane as may the lighter n-paraffins which do not contribute to the waxy nature of the oil. Because these lighter products are generally of lower value than the higher molecular weight materials, it would obviously be desirable to limit the degree of cracking which takes place during a catalytic dewaxing process.

Although U.S. Patents Nos. 3,700,585; 3,894,938; 4,176,050; 4,181,598; 4,222,855; 4,222,282; 4,247,388 and 4,859,311 teach dewaxing of waxy feeds, the processes disclosed therein do not disclose a process for producing high yields of a lube oil having a very low pour point and high viscosity index from feeds containing a very high wax content, i.e., greater than 80% wax, such as slack wax, deoiled wax or synthetic liquid polymers such as low molecular weight polyethylene.

Also, the prior art does not disclose a lube oil characterized by having both a low pour point (below about -24°C) and a viscosity index greater than 125. It is believed that the closest that the prior art comes to accomplishing this is

This is the replacement sheet

Date: 30 OCT 1996

set forth in one or more of U.S. Patents 3,365,390 (pour point -23°C, viscosity index 124); 3,658,689 (pour point -54°C, viscosity index 92 as calculated from Table III of the patent); 3,764,516 (same as 3,658,689); 3,487,005 (pour point -29°C, viscosity index 121 and 125 and pour point -46°C, viscosity index 122) and 4,547,283 pour point not specified but probably above 0°C as made by solvent dewaxing, viscosity index 154-156).

Since processes which remove wax will give a low yield with very waxy feeds, isomerization processes are preferred. U.S. Patent No. 4,734,539 discloses a method for isomerizing a naphtha feed using an intermediate pore size zeolite catalyst, such as an H-offretite catalyst. U.S. Patent No. 4,518,485 discloses a process for dewaxing a hydrocarbon feedstock containing paraffins by a hydrotreating and isomerization process.

U.S. Patent No. 4,689,138 discloses an isomerization process for reducing the normal paraffin content of a hydrocarbon oil feedstock using a catalyst comprising an intermediate pore size silicoaluminophosphate molecular sieve containing a Group VIII metal component which is occluded in the crystals during growth.

Lube oils may also be prepared from feeds having a high wax content such as slack wax by an isomerization process. In prior art wax isomerization processes, however, either the yield is low and thus the process is uneconomical, or the feed is not completely dewaxed. When the feed is not completely dewaxed it must be recycled to a

This is the replacement sheet

Date: 30 OCT 1996

dewaxing process, e.g., a solvent dewaxer, which limits the throughput and increases cost. U.S. Patent No. 4,547,283 discloses converting wax to lube. However, the MEK dewaxing following isomerization disclosed therein severely limits pour reduction and thus, very low pour points cannot be achieved. Further, the catalyst disclosed therein is much less selective than the catalysts used in the present invention.

Summary Of The Invention

The present invention overcomes the problems and disadvantages of the prior art by providing a process for preparing a lube oil comprising isomerizing a waxy feed over a catalyst comprising an inorganic oxide molecular sieve having generally oval 1-D pores having a minor axis between about 4.2Å and about 4.8Å and a major axis between about 5.4Å and about 7.0Å as determined by X-ray crystallography and at least one Group VIII metal.

It is an object of the invention to produce a lube oil having excellent viscosity and viscosity index properties and a very low pour point.

It is a further object of the invention to provide a lube oil having low frictional resistance.

It is an additional object of the invention to provide a lube oil which causes less engine wear than prior art mineral oils.

It is an additional object of the invention to provide a lube oil which provides increased fuel efficiency.

This is the replacement sheet

Date: 30 OCT 1996

It is yet a further object of the invention to provide a lube oil having improved oxidation resistance compared to conventional mineral oils. The term "oxidation resistance" refers to the resistance of the oil to oxygen addition, i.e., how rapidly oxygen is picked up and added to molecular species within the oil. Oxidation resistance is indicated by the oxidator BN measured in hours. Oxidator BN measures the time required for 100 grams of oil to absorb one liter of oxygen and is described in U.S. Patent No. 3,852,207 at column 6, lines 15-30 which is incorporated herein by reference.

Additional objects and advantages of the invention will be set forth in part in the description which follows, and in part will be obvious from the description, or may be learned by practice of the invention. The objects and advantages of the invention will be realized and attained by means of the instrumentalities and combinations, particularly pointed out in the appended claims.

In accordance with one embodiment the invention provides a process for producing a lube oil having excellent viscosity and viscosity index properties and a low pour point comprising isomerizing a waxy feed over a catalyst comprising an intermediate pore size silicoaluminophosphate molecular sieve and at least one Group VIII metal.

In accordance with another embodiment of the invention the catalyst in the process comprises an intermediate pore size ZSM-22, ZSM-23 or ZSM-35 zeolite.

This is the replacement sheet

Date: 30 OCT 1996

The lube oil of the invention has a high paraffinic content which provides a low viscosity for its boiling range. Such properties result in less frictional resistance, less engine wear and increased fuel efficiency. The low viscosity and low pour point of the lube oil result in easier cold engine starting than prior art mineral oils. The lube oil has a high viscosity index ranging from about 125 to about 180 and a very low pour point, ranging from less than about -63°C to about -24°C . Since little or no viscosity index improver compositions or pour point depressant compositions are necessary for use with the lube oil of the invention, fewer performance-decreasing deposits are formed. The high paraffinic nature of the oil gives it improved oxidation resistance compared to conventional mineral oils.

Brief Description Of The Drawings

The invention will be better understood by reference to figures of the drawings wherein like numbers denote like parts throughout and wherein:

Figure 1 is a ternary diagram showing the compositional parameters of the silicoaluminophosphates of U.S. Patent No. 4,440,871 in terms of mole fractions of silicon, aluminum and phosphorus.

Figure 2 is a ternary diagram showing the preferred compositional parameters of the silicoaluminophosphates of mole fractions of silicon, aluminum and phosphorus.

Figure 3 is a plot of 700 F+ lube yield versus pour point for the process set forth in Example 3.

This is the replacement sheet

Date: 30 OCT 1996

Figure 4 is a plot of viscosity index versus pour point for the process set forth in Example 3.

Detailed Description Of The Preferred Embodiments

Reference will now be made in detail to the present preferred embodiments of the invention.

As used herein, the term "waxy feed" includes petroleum waxes. The feedstock employed in the process of the invention preferably contains greater than about 50% wax, more preferably greater than about 80% wax, most preferably greater than about 90% wax. However, a highly paraffinic feed having a high pour point, generally above about 0°C, more usually above about 10°C, but containing less than 50% wax is also suitable for use in the process of the invention. Such a feed should preferably contain greater than about 70% paraffinic carbon, more preferably greater than about 80% paraffinic carbon, most preferably greater than about 90% paraffinic carbon.

Exemplary additional suitable feeds for use in the process of the invention include waxy distillate stocks such as gas oils, lubricating oil stocks, synthetic oils such as those by Fischer-Tropsch synthesis, high pour point polyalphaolefins, foots oils, synthetic waxes such as normal alphaolefin waxes, slack waxes, deoiled waxes and microcrystalline waxes. Foots oil is prepared by separating oil from the wax. The isolated oil is referred to as foots oil.

Feeds also suitable for use in the process of the invention are partially dewaxed oils

This is the replacement sheet

Date: 30 OCT 1996

wherein dewaxing to an intermediate pour point has been carried out by a process other than that claimed herein, for example, conventional catalytic dewaxing processes and solvent dewaxing processes. Exemplary suitable solvent dewaxing processes are set forth in U.S. Patent No. 4,547,287.

The process of the invention may also be employed in combination with conventional dewaxing processes to achieve a lube oil having particular desired properties. For example, the process of the invention can be used to reduce the pour point of a lube oil to a desired degree. Further reduction of the pour point can then be achieved using a conventional dewaxing process. Under such circumstances, immediately following the isomerization process of the invention, the lube oil may have a pour point greater than about 15°F. Further, the pour point of the lube oil produced by the process of the invention can be reduced by adding pour point depressant compositions thereto.

The feedstock will normally be a C_{20}^{+} feedstock generally boiling above about 600°F. However, the process of the invention is particularly useful with waxy distillate stocks such as gas oils, lubricating oil stocks, heating oils and other distillate fractions whose pour point and viscosity need to be maintained within certain specification limits. Lubricating oil stocks will generally boil above 230°C (450°F), more usually above 315°C (600°F). Hydroprocessed stocks are a convenient source of stocks of this kind and also of other distillate fractions since they normally contain significant amounts of waxy

This is the replacement sheet

Date: 30 OCT 1996

n-paraffins. The feedstock of the present process will normally be a $C_{20}+$ feedstock containing paraffins, olefins, naphthenes, aromatics and heterocyclic compounds and a substantial proportion of higher molecular weight n-paraffins and slightly branched paraffins which contribute to the waxy nature of the feedstock. During processing, the n-paraffins and the slightly branched paraffins undergo some cracking or hydrocracking to form liquid range materials which contribute to a low viscosity product. The degree of cracking which occurs is, however, limited so that the yield of low boiling products is reduced, thereby preserving the economic value of the feedstock.

Slack wax can be obtained from either a hydrocracked lube oil or a solvent refined lube oil. Hydrocracking is preferred because that process can also reduce the nitrogen content to low values. With slack wax derived from solvent refined oils, deoiling can be used to reduce the nitrogen content. Optionally, hydrotreating of the slack wax can be carried out to lower the nitrogen content thereof. Slack waxes possess a very high viscosity index, normally in the range of from 140 to 200, depending on the oil content and the starting material from which the wax has been prepared. Slack waxes are therefore eminently suitable for the preparation of lubricating oils having very high viscosity indices, i.e., from about 120 to about 180.

The present invention provides a unique lube oil product as characterized by its combination of low pour point and high viscosity

This is the replacement sheet

Date: 30 OCT 1996

index. The lube oil is characterized by a pour point below -24°C (generally between -24°C and -63°C) and a viscosity index between 125 and 180, suitably greater than about 130. Preferably the pour point is below -30°C , more preferably below -40°C , and the viscosity index is greater than about 140.

While the process of the invention can be practiced with utility when the feed contains organic (nitrogen containing impurities), it is preferred that the organic nitrogen content of the feed be less than about 50 ppmw (parts per million by weight), more preferably less than about 10 ppmw. Particularly good results, in terms of activity and length of catalyst cycle (period between successive regenerations or start-up and first regeneration) are experienced when the feed contains less than about 10 ppmw of organic nitrogen.

The phrase "intermediate pore size", as used herein means an effective pore aperture in the range of from about 5.3 to about 6.5 Å when the porous inorganic oxide is in the calcined form. Molecular sieves having pore apertures in this range tend to have unique molecular sieving characteristics. Unlike small pore zeolites such as erionite and chabazite, they will allow hydrocarbons having some branching into the molecular sieve void spaces. Unlike larger pore zeolites such as the faujasites and mordenites, they can differentiate between n-alkanes and slightly branched alkanes, and larger branched alkanes having, for example, quaternary carbon atoms.

This is the replacement sheet

Date: 30 OCT 1996

The effective pore size of the molecular sieves can be measured using standard adsorption techniques and hydrocarbonaceous compounds of known minimum kinetic diameters. See Breck, Zeolite Molecular Sieves, 1974 (especially Chapter 8); Anderson, et al., J. Catalysis 58, 114 (1979); and U.S. Patent No. 4,440,871, the pertinent portions of which are incorporated herein by reference.

In performing adsorption measurements to determine pore size, standard techniques are used. It is convenient to consider a particular molecule as excluded if it does not reach at least 95% of its equilibrium adsorption value on the molecular sieve in less than about 10 minutes ($p/p_o = 0.5$; 25°C).

Intermediate pore size molecular sieves will typically admit molecules having kinetic diameters of 5.3 to 6.5 Å with little hindrance. Examples of such compounds (and their kinetic diameters in Å) are: n-hexane (4.3), 3-methylpentane (5.5), benzene (5.85), and toluene (5.8). Compounds having kinetic diameters of about 6 to 6.5 Å can be admitted into the pores, depending on the particular sieve, but do not penetrate as quickly and in some cases are effectively excluded. Compounds having kinetic diameters in the range of 6 to 6.5 Å include: cyclohexane (6.0), 2,3-dimethylbutane (6.1), and m-xylene (6.1). Generally, compounds having kinetic diameters of greater than about 6.5 Å do not penetrate the pore apertures and thus are not absorbed into the interior of the molecular sieve lattice. Examples of such larger compounds

This is the replacement sheet

Date: 30 OCT 1996

include: o-xylene (6.8), 1,3,5-trimethylbenzene (7.5), and tributylamine (8.1).

The preferred effective pore size range is from about 5.5 to about 6.2 Å.

While the effective pore size as discussed above is important to the practice of the invention not all intermediate pore size molecular sieves having such effective pore sizes are advantageously usable in the practice of the present invention. Indeed, it is essential that the intermediate pore size molecular sieve catalysts used in the practice of the present invention have a very specific pore shape and size as measured by X-ray crystallography. First, the intracrystalline channels must be parallel and must not be interconnected. Such channels are conventionally referred to as 1-D diffusion types or more shortly as 1-D pores. The classification of intrazeolite channels as 1-D, 2-D and 3-D is set forth by R. M. Barrer in Zeolites, Science and Technology, edited by F. R. Rodrigues, L. D. Rollman and C. Naccache, NATO ASI Series, 1984 which classification is incorporated in its entirety by reference (see particularly page 75). Known 1-D zeolites include cancrinite hydrate, laumontite, mazzite, mordenite and zeolite L.

None of the above listed 1-D pore zeolites, however, satisfies the second essential criterion for catalysts useful in the practice of the present invention. This second essential criterion is that the pores must be generally oval in shape, by which is meant the pores must exhibit two unequal axes referred to herein as a minor axis and a major axis. The term oval as used

This is the replacement sheet

Date: 30 OCT 1996

herein is not meant to require a specific oval or elliptical shape but rather to refer to the pores exhibiting two unequal axes. In particular, the 1-D pores of the catalysts useful in the practice of the present invention must have a minor axis between about 4.2 Å and about 4.8 Å and a major axis between about 5.4 Å and about 7.0 Å as determined by conventional X-ray crystallography measurements.

The catalyst used in the isomerization process of the invention has an acidic component and a platinum and/or palladium hydrogenation component. In accordance with one embodiment of the invention the acidic component can suitably comprise an intermediate pore size silicoaluminophosphate molecular sieve which is described in U.S. Patent No. 4,440,871, the pertinent disclosure of which is incorporated herein by reference.


The most preferred intermediate pore size silicoaluminophosphate molecular sieve for use in the process of the invention is SAPO-11. SAPO-11 comprises a molecular framework of corner-sharing $[\text{SiO}_2]$ tetrahedra, $[\text{AlO}_2]$ tetrahedra and $[\text{PO}_2]$ tetrahedra, [i.e., $(\text{Si}_x\text{Al}_y\text{P}_z)\text{O}_2$ tetrahedral units]. When combined with a platinum or palladium hydrogenation component, the SAPO-11 converts the waxy components to produce a lubricating oil having excellent yield, very low pour point, low viscosity and high viscosity index.

SAPO-11 comprises a silicoaluminophosphate material having a three-dimensional microporous crystal framework structure of $[\text{PO}_2]$, $[\text{AlO}_2]$ and $[\text{SiO}_2]$ tetrahedral units whose unit empirical

This is the replacement sheet

Date: 30 OCT 1996

formula on an anhydrous basis is:



wherein "R" represents at least one organic templating agent present in the intracrystalline pore system; "m" represents the moles of "R" present per mole of $(Si_xAl_yP_z)O_2$ and has a value of from zero to about 0.3, "x", "y" and "z" represent respectively, the mole fractions of silicon, aluminum and phosphorous, said mole fractions being within the compositional area bounded by points A, B, C, D and E on the ternary diagram of Figure 1 or preferably within the area bounded by points a, b, c, d and e on the ternary diagram of Figure 2. The silicoaluminophosphate has a characteristic X-ray powder diffraction pattern which contains at least the d-spacings (as-synthesized and calcined) set forth below in Table I. When SAPO-11 is in the as-synthesized form "m" preferably has a value of from 0.02 to 0.3.

This is the replacement sheet

Date: 30 OCT 1996

TABLE I

<u>2θ</u>	<u>d(A)</u>	<u>Relative Intensity</u>
9.4 - 9.65	9.41 - 9.17	m
20.3 - 20.6	4.37 - 4.31	m
21.0 - 21.3	4.23 - 4.17	vs
22.1 - 22.35	4.02 - 3.99	m
22.5 - 22.9 (doublet)	3.95 - 3.92	m
23.15 - 23.35	3.84 - 3.81	m-s

All of the as-synthesized SAPO-11 compositions for which X-ray powder diffraction data have been obtained to date have patterns which are within the generalized pattern of Table II below.

These values were determined by standard techniques. The radiation was the K-alpha doublet of copper and a diffractometer equipped with a scintillation counter and an associated computer was used. The peak heights, I , and the positions as a function of 2θ , where θ is the Bragg angle, were determined using algorithms on the computer associated with the spectrometer. From these, the relative intensities, $100 I/I_0$, where I_0 is the intensity of the strongest line or peak, and d (obs.) the interplanar spacing in Angstroms, corresponding to the recorded lines, were determined. In the Tables, the relative intensities are given in terms of the symbols vs = very strong, s = strong, m = medium, w = weak, etc.

This is the replacement sheet

Date: 30 OCT 1996

TABLE II

<u>2θ</u>		<u>d(Å)</u>	<u>100XI/I₀</u>
8.05 - 8.3		10.98 - 10.65	20 - 42
9.4 - 9.65		9.41 - 9.17	36 - 58
13.1 - 13.4		6.76 - 6.61	12 - 16
15.6 - 15.85		5.68 - 5.59	23 - 38
16.2 - 16.4		5.47 - 5.40	3 - 5
18.95 - 19.2		4.68 - 4.62	5 - 6
20.3 - 20.6		4.37 - 4.31	36 - 49
21.0 - 21.3		4.23 - 4.17	100
22.1 - 22.35		4.02 - 3.99	47 - 59
22.5 - 22.9 (doublet)		3.95 - 3.92	55 - 60
23.15 - 23.35		3.84 - 3.81	64 - 74
24.5 - 24.9 (doublet)		3.63 - 3.58	7 - 10
26.4 - 26.8 (doublet)		3.38 - 3.33	11 - 19
27.2 - 27.3		3.28 - 3.27	0 - 1
28.3 - 28.5 (shoulder)		3.15 - 3.13	11 - 17
28.6 - 28.85		3.121 - 3.094	
29.0 - 29.2		3.079 - 3.058	0 - 3
29.45 - 29.65		3.033 - 3.013	5 - 7
31.45 - 31.7		2.846 - 2.823	7 - 9
32.8 - 33.1		2.730 - 2.706	11 - 14
34.1 - 34.4		2.629 - 2.607	7 - 9
35.7 - 36.0		2.515 - 2.495	0 - 3
36.3 - 36.7		2.475 - 2.449	3 - 4
37.5 - 38.0 (doublet)		2.398 - 2.368	10 - 13
39.3 - 39.55		2.292 - 2.279	2 - 3
40.3		2.238	0 - 2
42.2 - 42.4		2.141 - 2.132	0 - 2
42.8 - 43.1		2.113 - 2.099	3 - 6
44.8 - 45.2 (doublet)		2.023 - 2.006	3 - 5
45.9 - 46.1		1.977 - 1.969	0 - 2
46.8 - 47.1		1.941 - 1.929	0 - 1
48.7 - 49.0		1.870 - 1.859	2 - 3
50.5 - 50.8		1.807 - 1.797	3 - 4
54.6 - 54.8		1.681 - 1.675	2 - 3
55.4 - 55.7		1.658 - 1.650	0 - 2

This is the replacement sheet

Date: 30 OCT 1996

Another intermediate pore size silicoaluminophosphate molecular sieve preferably used in the process of the invention is SAPO-31. SAPO-31 comprises a silicoaluminophosphate having a three-dimensional microporous crystal framework of $[PO_2]$, $[AlO_2]$ and $[SiO_2]$ tetrahedral units whose unit empirical formula on an anhydrous basis is:



wherein R represents at least one organic templating agent present in the intracrystalline pore system; "m" represents the moles of "R" present per mole of $(Si_xAl_yP_z)_2O_2$ and has a value of from zero to 0.3; "x", "y" and "z" represent respectively, the mole fractions of silicon, aluminum and phosphorous, said mole fractions being within the compositional area bounded by points A, B, C, D and E on the ternary diagram of Figure 1, or preferably within the area bounded by points a, b, c, d and e on the ternary diagram of Figure 2. The silicoaluminophosphate has a characteristic X-ray powder diffraction pattern (as-synthesized and calcined) which contains at least the d-spacings set forth below in Table III. When SAPO-31 is in the as-synthesized form, "m" preferably has a value of from 0.02 to 0.3.

This is the replacement sheet

Date: 30 OCT 1996

TABLE III

<u>2θ</u>	<u>d(Å)</u>	<u>Relative Intensity</u>
8.5 - 8.6	10.40 - 10.28	m - s
20.2 - 20.3	4.40 - 4.37	m
21.9 - 22.1	4.06 - 4.02	w - m
22.6 - 22.7	3.93 - 3.92	vs
31.7 - 31.8	3.823 - 2.814	w - m

All of the as-synthesized SAPO-31 compositions for which X-ray powder diffraction data have presently been obtained have patterns which are within the generalized pattern of Table IV below.

This is the replacement sheet

Date: 30 OCT 1996

TABLE IV


<u>2θ</u>	<u>d(Å)</u>	<u>100XI/I₀</u>
6.1	14.5	0 - 1
8.5 - 8.6*	10.40 - 10.28	60 - 72
9.5*	9.31	7 - 14
13.2 - 13.3*	6.71 - 6.66	1 - 4
14.7 - 14.8	6.03 - 5.99	1 - 2
15.7 - 15.8*	5.64 - 5.61	1 - 8
17.05 - 17.1	5.20 - 5.19	2 - 4
18.3 - 18.4	4.85 - 4.82	2 - 3
20.2 - 20.3	4.40 - 4.37	44 - 55
21.1 - 21.2*	4.21 - 4.19	6 - 28
21.9 - 22.1*	4.06 - 4.02	32 - 38
22.6 - 22.7*	3.93 - 3.92	100
23.3 - 23.35	3.818 - 3.810	2 - 20
25.1*	3.548	3 - 4
25.65 - 25.75	3.473 - 3.460	2 - 3
26.5*	3.363	1 - 4
27.9 - 28.0	3.198 - 3.187	8 - 10
28.7*	3.110	0 - 2
29.7	3.008	4 - 5
31.7 - 31.8	2.823 - 2.814	15 - 18
32.9 - 33.0*	2.722 - 2.714	0 - 3
35.1 - 35.2	2.557 - 2.550	5 - 8
36.0 - 36.1	2.495 - 2.488	1 - 2
37.2	2.417	1 - 2
37.9 - 38.1*	2.374 - 2.362	2 - 4
39.3	2.292	2 - 3
43.0 - 43.1*	2.103 - 2.100	1
44.8 - 45.2*	2.023 - 2.006	1
46.6	1.949	1 - 2
47.4 - 47.5	1.918	1
48.6 - 48.7	1.872 - 1.870	2
50.7 - 50.8	1.801 - 1.797	1
51.6 - 51.7	1.771 - 1.768	2 - 3
55.4 - 55.5	1.658 - 1.656	1

* Possibly contains peak from a minor impurity.

SAPO-41, also suitable for use in the process of the invention, comprises a silicoaluminophosphate having a three-dimensional microporous crystal framework structure of [PO₂], [AlO₂] and [SiO₂] tetrahedral units, and whose unit empirical formula on an anhydrous basis is:

This is the replacement sheet

Date: 30 OCT 1996



wherein R represents at least one organic templating agent present in the intracrystalline pore system; "m" represents the moles of "R" present per mole of $(Si_xAl_yP_z)O_2$ and has a value of from zero to 0.3; "x", "y" and "z" represent respectively, the mole fractions of silicon, aluminum and phosphorous, said mole fractions being within the compositional area bounded by points A, B, C, D and E on the ternary diagram of Figure 1, or preferably within the area bounded by points a, b, c, d and e on the ternary diagram of Figure 2, and said silicoaluminophosphate having a characteristic X-ray powder diffraction pattern (as-synthesized and calcined) which contains at least the d-spacings set forth below in Table V. When SAPO-41 is in the as-synthesized form "m" preferably has a value of from 0.02 to 0.03.

TABLE V

<u>2θ</u>	<u>d(Å)</u>	<u>Relative Intensity</u>
13.6 - 13.8	6.51 - 6.42	w - m
20.5 - 20.6	4.33 - 4.31	w - m
21.1 - 21.3	4.21 - 4.17	vs
22.1 - 22.3	4.02 - 3.99	m - s
22.8 - 23.0	3.90 - 3.86	m
23.1 - 23.4	3.82 - 3.80	w - m
25.5 - 25.9	3.493 - 3.44	w - m

All of the as-synthesized SAPO-41 compositions for which X-ray powder diffraction data have presently been obtained have patterns which are within the generalized pattern of Table VI below.

This is the replacement sheet

Date: 30 OCT 1996

TABLE VI

<u>2θ</u>	<u>d(Å)</u>	<u>100 X I/I₀</u>
6.7 - 6.8	13.19 - 12.99	15 - 24
9.6 - 9.7	9.21 - 9.11	12 - 25
13.6 - 13.8	6.51 - 6.42	10 - 28
18.2 - 18.3	4.87 - 4.85	8 - 10
20.5 - 20.6	4.33 - 4.31	10 - 32
21.1 - 21.3	4.21 - 4.17	100
22.1 - 22.3	4.02 - 3.99	45 - 82
22.8 - 23.0	3.90 - 3.87	43 - 58
23.1 - 23.4	3.82 - 3.80	20 - 30
25.2 - 25.5	3.53 - 3.49	8 - 20
25.5 - 25.9	3.493 - 3.44	12 - 28
29.3 - 29.5	3.048 - 3.028	17 - 23
31.4 - 31.6	2.849 - 2.831	5 - 10
33.1 - 33.3	2.706 - 2.690	5 - 7
37.6 - 37.9	2.392 - 2.374	10 - 15
38.1 - 38.3	2.362 - 2.350	7 - 10
39.6 - 39.8	2.276 - 2.265	2 - 5
42.8 - 43.0	2.113 - 2.103	5 - 8
49.0 - 49.3	1.856 - 1.848	1 - 8
51.5	1.774	0 - 8

The process of the invention may also be carried out using a catalyst comprising an intermediate pore size nonzeolitic molecular sieve containing AlO_2 and PO_2 tetrahedral oxide units, and at least one Group VIII metal. Exemplary suitable intermediate pore size nonzeolitic molecular sieves are set forth in European patent Application No. 158,977 which is incorporated herein by reference.

The group of intermediate pore size zeolites of the present invention include ZSM-22, ZSM-23 and ZSM-35. These catalysts are generally considered to be intermediate pore size catalysts based on the measure of their internal structure as represented by their Constraint Index. Zeolites which provide highly restricted access to and egress from their internal structure have a high value for the Constraint Index, while

This is the replacement sheet

Date: 30 OCT 1996

zeolites which provide relatively free access to the internal zeolite structure have a low value for their Constraint Index. The method for determining Constraint Index is described fully in U.S. Patent No. 4,016,218 which is incorporated herein by reference.

Those zeolites exhibiting a Constraint Index value within the range of from about 1 to about 12 are considered to be intermediate pore size zeolites. Zeolites which are considered to be in this range include ZSM-5, ZSM-11, etc. Upon careful examination of the intermediate pore size zeolites, however, it has been found that not all of them are efficient as a catalyst for isomerization of a paraffin-containing feedstock which are high in $C_{20}+$ paraffins, and preferably which are high in $C_{22}+$ paraffins. In particular, it has been found that the group including ZSM-22, ZSM-23 and ZSM-35 used in combination with Group VIII metals can provide a means whereby a hydrocarbon feedstock having a paraffinic content with molecules of 20 carbon atoms or more undergoes unexpectedly efficient isomerization without destroying the ultimate yield of the feedstock.

It is known to use prior art techniques for formation of a great variety of synthetic aluminosilicates. These aluminosilicates have come to be designated by letter or other convenient symbols. One of the zeolites of the present invention, ZSM-22, is a highly siliceous material which includes crystalline three-dimensional continuous framework silicon containing structures or crystals which result

This is the replacement sheet

Date: 30 OCT 1996

when all the oxygen atoms in the tetrahedra are mutually shared between tetrahedral atoms of silicon or aluminum, and which can exist with a network of mostly SiO_2 , i.e., exclusive of any intracrystalline cations. The description of ZSM-22 is set forth in full in U.S. Patent No. 4,556,477, U.S. Patent No. 4,481,177 and European Patent Application No. 102,716 the contents of which are incorporated herein by reference.

As indicated in U.S. Patent No. 4,566,477 the crystalline material ZSM-22 has been designated with a characteristic X-ray diffraction pattern as set forth in Table VII.

TABLE VII

Most Significant Lines of ZSM-22

<u>Interplanar d-spacings (Å)</u>	<u>Relative Intensity(I/I₀)</u>
10.9 ± 0.2	M - VS
8.7 ± 0.16	W
6.94 ± 0.10	W - M
5.40 ± 0.08	W
4.58 ± 0.07	W
4.36 ± 0.07	VS
3.68 ± 0.05	VS
3.62 ± 0.05	S - VS
3.47 ± 0.04	M - S
3.30 ± 0.04	W
2.74 ± 0.02	W
2.52 ± 0.02	W

It should be understood that the X-ray diffraction pattern of Table VII is characteristic of all the species of ZSM-22 zeolite compositions. Ion exchange of the alkali metal cations with other ions results in a zeolite which reveals substantially the same X-ray diffraction pattern

This is the replacement sheet

Date: 30 OCT 1996

with some minor shifts in interplanar spacing and variation in relative intensity.

Furthermore, the original cations of the as-synthesized ZSM-22 can be replaced at least in part by other ions using conventional ion exchange techniques. It may be necessary to precalcine the ZSM-22 zeolite crystals prior to ion exchange. In accordance with the present invention, the replacement ions are those taken from Group VIII of the Periodic Table, especially platinum, palladium, iridium, osmium, rhodium and ruthenium.

ZSM-22 freely sorbs normal hexane and has a pore dimension greater than about 4 Å. In addition, the structure of the zeolite provides constrained access to larger molecules. The Constraint Index as determined by the procedure set forth in U.S. Patent No. 4,016,246 for ZSM-22 has been determined to be from about 2.5 to about 3.0.

Another zeolite which can be used with the present invention is the synthetic crystalline aluminosilicate referred to as ZSM-23, disclosed in U.S. Patent No. 4,076,842, the contents of which are incorporated herein by reference. The ZSM-23 composition has a characteristic X-ray diffraction pattern as set forth herein in Table VIII.

Other molecular sieves which can be used with the present invention include, for example, Theta-1, as described in U.S. Patents 4,533,649 and 4,836,910, both of which are incorporated in their entireties by reference, Nu-10, as described in European Patent Application 065,400 which is incorporated in its entirety by reference and SSZ-

This is the replacement sheet

Date: 30 OCT 1996

20 as described in U.S. Patent 4,483,835 which is incorporated in its entirety by reference.

TABLE VIII

<u>d(Å)</u>			<u>I/I₀</u>
11.2	±	0.23	M
10.1	±	0.20	W
7.87	±	0.15	W
5.59	±	0.10	W
5.44	±	0.10	W
4.90	±	0.10	W
4.53	±	0.10	S
3.90	±	0.08	VS
3.72	±	0.08	VS
3.62	±	0.07	VS
3.54	±	0.07	M
3.44	±	0.07	S
3.36	±	0.07	W
3.16	±	0.07	W
3.05	±	0.06	W
2.99	±	0.06	W
2.85	±	0.06	W
2.54	±	0.05	M
2.47	±	0.05	W
2.40	±	0.05	W
2.34	±	0.05	W


The ZSM-23 composition can also be defined in terms of mole ratios of oxides in the anhydrous state as follows:

$(0.58 - 3.4)M_{2/n}O: Al_2O_3: (40 - 250)SiO_2$
 wherein M is at least 1 cation and n is the valence thereof. As in the ZSM-22, the original cations of as-synthesized ZSM-23 can be replaced in accordance with techniques well-known in the art, at least in part by ionic exchange with other cations. In the present invention these cations include the Group VIII metals as set forth hereinbefore.

This is the replacement sheet

Date: 30 OCT 1996

The third intermediate pore size zeolite which has been found to be successful in the present invention is ZSM-35, which is disclosed in U.S. Patent No. 4,016,245, the contents of which are incorporated herein by reference. The synthetic crystalline aluminosilicate known as ZSM-35, has a characteristic X-ray diffraction pattern which is set forth in U.S. Patent No. 4,016,245. ZSM-35 has a composition which can be defined in terms of mole ratio of oxides in the anhydrous state as follows:



wherein R is organic nitrogen-containing cation derived from ethylenediamine or pyrrolidine and M is an alkali metal cation. The original cations of the as-synthesized ZSM-35 can be removed using techniques well known in the art which includes ion exchange with other cations. In the present invention the cation exchange is used to replace the as-synthesized cations with the Group VIII metals set forth herein. It has been observed that the X-ray diffraction pattern of ZSM-35 is similar to that of natural ferrierite with a notable exception being that natural ferrierite patterns exhibit a significant line at 1.33 Å.

X-ray crystallography of SAPO-11, SAPO-31, SAPO-41, ZSM-22, ZSM-23 and ZSM-35 shows these molecular sieves to have the following major and minor axes: SAPO-11, major 6.7 Å, minor 4.4 Å; (Benett, J. M., et al, Zeolites, 1, 160(87)), SAPO-31 and SAPO-41, believed to be slightly larger than SAPO-11, ZSM-22, major 5.5 Å, minor 4.5 Å (Kokotailo, G. T., et al, Zeolites, 5, 349(85)); ZSM-23, major 5.6 Å, minor 4.5 Å; ZSM-35, major

This is the replacement sheet

Date: 30 OCT 1996

5.4 Å, minor 4.2 Å (Meier, W. M. and Olsen, D. H., Atlas of Zeolite Structure Types, Butterworths, 1987).

The intermediate pore size molecular sieve is used in admixture with at least one Group VIII metal. Preferably the Group VIII metal is selected from the group consisting of at least one of platinum and palladium and optionally, other catalytically active metals such as molybdenum, nickel, vanadium, cobalt, tungsten, zinc and mixtures thereof. Most preferably, the Group VIII metal is selected from the group consisting of at least one of platinum and palladium. The amount of metal ranges from about 0.01% to about 10% by weight of the molecular sieve, preferably from about 0.2% to about 5% by weight of the molecular sieve. The techniques of introducing catalytically active metals into a molecular sieve are disclosed in the literature, and preexisting metal incorporation techniques and treatment of the molecular sieve to form an active catalyst such as ion exchange, impregnation or occlusion during sieve preparation are suitable for use in the present process. Such techniques are disclosed in U.S. Patent Nos. 3,236,761; 3,226,339; 3,236,762; 3,620,960; 3,373,109; 4,202,996; 4,440,781 and 4,710,485 which are incorporated herein by reference.

The term "metal" or "active metal" as used herein means one or more metals in the elemental state or in some form such as sulfide, oxide and mixtures thereof. Regardless of the state in which the metallic component actually exists, the

This is the replacement sheet

Date:~

30 OCT 1996

concentrations are computed as if they existed in the elemental state.

The catalyst may also contain metals which reduce the number of strong acid sites on the catalyst and thereby lower the selectivity for cracking versus isomerization. Especially preferred are the Group IIA metals such as magnesium and calcium.

It is preferred that relatively small crystal size catalyst be utilized in practicing the invention. Suitably, the average crystal size is no greater than about 10μ , preferably no more than about 5μ , more preferably no more than about 1μ and still more preferably no more than about 0.5μ .

Strong acidity may also be reduced by introducing nitrogen compounds, e.g., NH_3 or organic nitrogen compounds, into the feed; however, the total nitrogen content should be less than 50 ppm, preferably less than 10 ppm. The physical form of the catalyst depends on the type of catalytic reactor being employed and may be in the form of a granule or powder, and is desirably compacted into a more readily usable form (e.g., larger agglomerates), usually with a silica or alumina binder for fluidized bed reaction, or pills, prills, spheres, extrudates, or other shapes of controlled size to accord adequate catalyst-reactant contact. The catalyst may be employed either as a fluidized catalyst, or in a fixed or moving bed, and in one or more reaction stages.

The catalytic isomerization step of the invention may be conducted by contacting the feed

This is the replacement sheet

Date: 30 OCT 1996

with a fixed stationary bed of catalyst, with a fixed fluidized bed, or with a transport bed. A simple and therefore preferred configuration is a trickle-bed operation in which the feed is allowed to trickle through a stationary fixed bed, preferably in the presence of hydrogen.

The catalytic isomerization conditions employed depend on the feed used and the desired pour point. Generally, the temperature is from about 200°C to about 475°C, preferably from about 250°C and to about 450°C. The pressure is typically from about 15 psig and to about 2000 psig, preferably from about 50 to about 1000 psig, more preferably from about 100 psig to about 600 psig. The process of the invention is preferably carried out at low pressure. The liquid hourly space velocity (LHSV) is preferably from about 0.1 to about 20, more preferably from about 0.1 to about 5, and most preferably from about 0.1 to about 1.0. Low pressure and low liquid hourly space velocity provide enhanced isomerization selectivity which results in more isomerization and less cracking of the feed thus producing an increased yield.

Hydrogen is preferably present in the reaction zone during the catalytic isomerization process. The hydrogen to feed ratio is typically from about 500 to about 30,000 SCF/bbl (standard cubic feet per barrel), preferably from about 1,000 to about 10,000 SCF/bbl. Generally, hydrogen will be separated from the product and recycled to the reaction zone.

The intermediate pore size molecular sieve used in the isomerization step provides selective

This is the replacement sheet

Date: 30 OCT 1996

conversion of the waxy components to non-waxy components. During processing, isomerization of the paraffins occurs to reduce the pour point of the oil below that of the feed and form lube oil boiling range materials which contribute to a low pour point product having excellent viscosity index properties.

Because of the selectivity of the intermediate pore size molecular sieve used in the invention, the yield of low boiling products is reduced, thereby preserving the economic value of the feedstock.

The intermediate pore size molecular sieve catalyst can be manufactured into a wide variety of physical forms. The molecular sieves can be in the form of a powder, a granule, or a molded product, such as an extrudate having a particle size sufficient to pass through a 2-mesh (Tyler) screen and be retained on a 40-mesh (Tyler) screen. In cases wherein the catalyst is molded, such as by extrusion with a binder, the silicoaluminophosphate can be extruded before drying, or, dried or partially dried and then extruded.

The molecular sieve can be composited with other materials resistant to temperatures and other conditions employed in the isomerization process. Such matrix materials include active and inactive materials and synthetic or naturally occurring zeolites as well as inorganic materials such as clays, silica and metal oxides. The latter may be either naturally occurring or in the form of gelatinous precipitates, sols or gels including mixtures of silica and metal oxides.

This is the replacement sheet

Date:

30 OCT 1996

Inactive materials suitably serve as diluents to control the amount of conversion in the isomerization process so that products can be obtained economically without employing other means for controlling the rate of reaction. The molecular sieve may be incorporated into naturally occurring clays, e.g., bentonite and kaolin. These materials, i.e., clays, oxides, etc., function, in part, as binders for the catalyst. It is desirable to provide a catalyst having good crush strength because in petroleum refining, the catalyst is often subjected to rough handling. This tends to break the catalyst down into powder-like materials which cause problems in processing.

Naturally occurring clays which can be composited with the molecular sieve include the montmorillonite and kaolin families, which families include the sub-bentonites, and the kaolins commonly known as Dixie, McNamee, Georgia and Florida clays or others in which the main mineral constituent is halloysite, kaolinite, dickite, nacrite or anauxite. Fibrous clays such as halloysite, sepiolite and attapulgite can also be use as supports. Such clays can be used in the raw state as originally mined or initially subjected to calcination, acid treatment or chemical modification.

In addition to the foregoing materials, the molecular sieve can be composited with porous matrix materials and mixtures of matrix materials such as silica, alumina, titania, magnesia, silica-alumina, silica-magnesia, silica-zirconia, silica-thoria, silica-beryllia, silica-titania, titania-zirconia as well as ternary compositions

This is the replacement sheet

Date: 30 OCT 1996

such as silica-alumina-thoria, silica-alumina-titania, silica-alumina-magnesia and silica-magnesia-zirconia. The matrix can be in the form of a cogel.

The catalyst used in the process of this invention can also be composited with other zeolites such as synthetic and natural faujasites, (e.g., X and Y) erionites, and mordenites. It can also be composited with purely synthetic zeolites such as those of the ZSM series. The combination of zeolites can also be composited in a porous inorganic matrix.

It is often desirable to use mild hydrogenation referred to as hydrofinishing after isomerization to produce more stable lubricating oils. Hydrofinishing is typically conducted at temperatures ranging from about 190°C to about 340°C, at pressures from about 400 psig to about 3000 psig, at space velocities (LHSV) from about 0.1 to about 20, and hydrogen recycle rates of from about 400 to about 1500 SCF/bbl. The hydrogenation catalyst employed must be active enough not only to hydrogenate the olefins, diolefins and color bodies within the lube oil fractions, but also to reduce the aromatic content. The hydrofinishing step is beneficial in preparing an acceptably stable lubricating oil.

Suitable hydrogenation catalysts include conventional metallic hydrogenation catalysts, particularly the Group VIII metals such as cobalt, nickel, palladium and platinum. The metals are typically associated with carriers such as bauxite, alumina, silica gel, silica-alumina composites, and crystalline aluminosilicate

This is the replacement sheet

Date: 30 OCT 1996

zeolites. Palladium is a particularly preferred hydrogenation metal. If desired, non-noble Group VIII metals can be used with molybdates. Metal oxides or sulfides can be used. Suitable catalysts are disclosed in U.S. Patent Nos. 3,852,207; 4,157,294; 3,904,513 and 4,673,487, which are incorporated herein by reference.

The high viscosity index lube oil produced by the process of the present invention can be used as a blending component to raise the viscosity index of lube oils to a higher value. Since yield decreases with increasing viscosity index in either hydrocracking or solvent refining, the use of an isomerized wax to increase the viscosity index improves yield.

The invention will be further clarified by the following examples, which are intended to be purely exemplary of the invention.

The wax content of the oil set forth in the following Examples was determined as follows:

300 g of oil was diluted 50/50 with a 4:1 mixture of methyl ethyl ketone and toluene which was cooled to -20°C in a refrigerator. The mixture was filtered through a Coors funnel at -15°C using Whatman No. 3 filter paper. The wax was removed from the filter and placed in a tared 2 liter flask. The solvent was removed on a hot plate and the wax weighed.

Example 1


SAPO-11 was prepared as follows:

472.4 g of 85% H_3PO_4 were added to 1208 g of distilled H_2O in a Teflon beaker in an ice bath. 816.8 g of aluminum isopropoxide ($\text{Al}[\text{OC}_2\text{H}_5]_3$) were

This is the replacement sheet

Date: 30 OCT 1996

slowly added with mixing and then mixed until homogenous. Then 120 g of fumed silica (Cabosil M-5) were added with mixing. Next, 182.4 g of di-n-propylamine (Pr_2NH) were added, followed by 9.0 g of 85% H_3PO_4 . Final mixing was done using a Polytron. The mixture had a pH of 6.5 and the following composition, expressed in molar ratio of oxides:



The mixture was placed in a Teflon bottle in a stainless steel pressure vessel and heated for 5 days at 200°C with no stirring and autogenous pressure. The supernatant liquid was removed and the product was filtered, washed with water, dried overnight at 121°C, and calcined in air for 8 hours at 566°C. The average crystallite size was less than 0.5 micron. The product was identified as SAPO-11 by X-ray diffraction analysis. Elemental analysis of the calcined sieve showed it to have the following anhydrous molar composition:



The sieve was bound with 35% Catapal alumina and made into 1/10 inch extrudate. The extrudate was dried 3 hours at 121°C, calcined in air for 4 hours at 454°C, then impregnated with 0.5% Pt (as $\text{Pt}(\text{NH}_3)_4\text{Cl}_2 \cdot \text{H}_2\text{O}$) by the pore-fill method. It was then dried for 2 hours at 93°C, 2 hours at 149°C, and calcined in air for 8 hours at 454°C. For the following examples, the catalyst was crushed and screened to 24-42 mesh.

This is the replacement sheet

Date: 30 OCT 1996

Example 2

The catalyst of Example 1 was used to isomerize a 800°F+ hydrocracked waxy vacuum gas oil (Table IX) at 2200 psig, 1 LHSV, and 8 M SCF/bbl once-through H₂. The catalyst was also run at 400 psig. The results are set forth in Table X and demonstrate that high lube yield at very low pour point is achieved by the present process. The data also evidences the substantial yield benefit from operating at a lower reactor pressure. Lube yield is

This is the replacement sheet

Date: 30 OCT 1996

TABLE IX

800°F+ Hydrocracked Waxy VGO

Gravity, °API	40.0
Wax, Wt. %	25.0
Pour Point, °C	+39
Viscosity at 100°C, cSt	4.585
VI	152

Simulated Distillation, LV%, °F

ST/5	749/769
10/30	778/803
50	826
70/90	857/920
95/99	956/1016

Hydrocarbon Distribution, LV%

Paraffins	54
Naphthenes	29
Aromatics	17

Carbon Type Distribution, ndM, (D3238-85), wt%

Paraffinic	92
Naphthenic	8
Aromatic	0

This is the replacement sheet

Date: 30 OCT 1996

TABLE X

Isomerizing 800°F+ Hydrocracked Waxy VGO at 1 LHSV and 8 M SCF/bbl H₂ (Pt/SAPO-11)

Pressure, psig	Catalyst Temperature, °F	Yield, Wt. %	Pour/Cloud, °C	Viscosity at 40/100°C, cSt	VI
2200	670	74.5	-12/-6	18.87/4.305	139
	690	63.3	-24/-19	19.08/4.301	136
	710	44.9	-48/-47	19.56/4.294	129
400	650	69.7	-45/-28	19.43/4.349	136
	670	55.0	<-63/<-63	19.64/4.304	128

-38-

This is the replacement sheet

Date: 30 OCT 1996

defined as $\frac{g(\text{product})}{g(\text{feed})} \times 100\%$ where the product

has the same 5 LV% boiling point as the feed.

Example 3

The catalyst of Example 1 was used to isomerize a slack wax derived from a 900°F+ hydrocracked vacuum gas oil (Table XI). Conditions were 160 psig reactor pressure, 0.3 LHSV, and 8 M SCF/bbl once-through H₂. At a catalyst temperature of 680°F, a -27°C pour point oil of 7.1 cSt viscosity at 100°C and 149 viscosity index was produced. Pour point reduction could be increased by raising the catalyst temperature. Figure 3 shows a plot of 700°F+ lube yield versus pour point, where 700°F+ lube yield is defined as:

$$\left(\frac{g_{700^\circ\text{F}+}(\text{feed}) - g_{700^\circ\text{F}+}(\text{product})}{g_{700^\circ\text{F}+}(\text{feed})} \right) \times 100\%$$

Figure 4 shows a plot of viscosity index versus pour point.

A -30°C pour point oil prepared in this example was subsequently hydrofinished over a 0.5% Pd on silica-alumina catalyst at 500°F, 2200 psig,

This is the replacement sheet

Date:

30 OCT 1996

TABLE XI

Slack Wax From 900°F+ Hydrocracked VGO

Gravity, °API	23.2
Sulfur, ppm	2.2
Nitrogen, ppm	<1
Pour Point, °C	+63
Viscosity, cSt, 100°C	8.30
70°C	16.55
Oil in Wax, Wt%	14.5

Simulated Distillation, LV%, °F

ST/5	802/860
10/30	885/933
50	960
70/90	995/1038
95/99	1063/1118

This is the replacement sheet

Date: 30 OCT 1996

0.25 LHSV, and 8 M SCF/bbl H_2 . Inspections of the hydrofinished oil are given in Table XVI.

Example 4

The catalyst of Example 1 was used to isomerize a deoiled slack wax derived from a 700-800°F solvent refined vacuum gas oil (Table XII). Conditions were 160 psig, 0.3 LHSV, and 8 M SCF/bbl once-through H_2 . The results are set forth in Table XIII.

Example 5

The catalyst of Example 1 was used to isomerize a deoiled slack wax derived from a 800-900°F solvent refined vacuum gas oil (Table XIV). Conditions were the same as in Example 4. The results are set forth in Table XV.

This is the replacement sheet

Date: 30 OCT 1996

TABLE XII

Deoiled Slack Wax from
700-800°F Solvent Refined VGO

Gravity, °API	41.0
Pour Point, °C	+51
Viscosity, cSt, 100°C	3.141
Sulfur, ppm	383
Nitrogen, ppm	8.9
N-paraffins, Wt.%	77.2

Simulated Distillation, LV%, °F

ST/5	617/674
10/30	695/732
50	760
70/90	795/842
95/99	861/903

This is the replacement sheet

Date: 30 OCT 1996

TABLE XIII

Isomerizing Deoiled Slack Wax from 700-800°F

Solvent Refined Oil at 160 psig. 0.3 LHSV and 8 M SCF/bbl H₂ over Pt/SAPO-11

Catalyst	650°F+	Pour/Cloud,	Viscosity at	
Temperature, °F	Yield, Wt. %	°C	40/100°C, cSt	VI
640	72.0	-18/-5	9.563/2.817	151
650	77.1	-15/-2	9.883/2.889	154
655	81.1	-15/0	10.10/2.918	150

This is the replacement sheet

Date:

30 OCT 1996

TABLE XIV

Deoiled Slack Wax from
800-900°F Solvent Refined VGO

Gravity, °API	40.2
Pour Point, °C	+57
Viscosity, cSt, 100°C	4.317
70°C	7.554
Sulfur, ppm	122
Nitrogen, ppm	3.4
N-paraffins, Wt.%	57.1

Simulated Distillation, LV%, °F

ST/5	565/714
10/30	738/808
50	843
70/90	873/909
95/99	928/965

This is the replacement sheet

Date: 30 OCT 1996

TABLE XV

Isomerizing Deoiled Slack Wax from 800-900°F

Solvent Refined Oil at 160 psig, 0.3 LHSV and 8 M SCF/bbl H₂ over Pt/SAPO-11

Catalyst	700°F+	Pour/Cloud,	Viscosity at	
Temperature, °F	Yield, Wt. %	°C	40/100°C, cSt	VI
655	90.4	+ 6/+17	15.44/4.017	169
670	85.3	- 9/+3	15.58/3.938	155
685	79.5	-24/-6	16.16/3.997	152
700	77.4	-27/-9	16.73/4.050	147

This is the replacement sheet

Date: 30 OCT 1996

Example 6

ZSM-22 was prepared as follows:

The following reactants were combined to produce a gel: N,N'-dimethyl imidazolium hydroxide, Ludox AS-30 silica sol, aluminum sulfate, sodium hydroxide, and water in the ratios:

$$\text{SiO}_2/\text{Al}_2\text{O}_3 = 100$$

$$\text{H}_2\text{O}/\text{SiO}_2 = 30$$

$$\text{template}/\text{SiO}_2 = 0.15$$

$$\text{NaOH}/\text{SiO}_2 = 0.10$$

$$\text{OH}^-/\text{SiO}_2 = 0.25$$

The reaction was run at autogenous pressure in a stainless steel autoclave at 150°C for 6 days. The product was filtered, calcinated to 1000°F in air, ion-exchanged four times with excess NH_4NO_3 and calcined again to 1000°F. The product was identified by X-ray diffraction analysis as ZSM-22. The $\text{SiO}_2/\text{Al}_2\text{O}_3$ mole ratio was about 100. The sieve was bound with 35% Catapal and the extrudate impregnated

This is the replacement sheet

Date: 30 OCT 1996

TABLE XVI

Hydrofinished Oil from Example 3

Color	< 1.0
Gravity, °API	37.0
Aniline Pt, °F	259.6
Pour Point, °C	-30
Cloud Point, °C	-7
Sulfur, ppm	0.4
Nitrogen, ppm	<1
Viscosity, cSt	
40°C	39.33
100°C	7.073
VI	143
Oxidator BN, hr	40.9
Carbon Type Distribution, ndM, Wt. %	
Paraffinic	80.27
Naphthenic	19.73
Aromatic	0.00
Simulated Distillation, LV%, °F	
ST/5	630/702
10/30	749/862
50	916
70/90	957/1005
95/99	1030/1084

This is the replacement sheet

Date: 30 OCT 1996

with 1% Pt and calcined in the same manner as the catalyst of Example 1.

Example 7

The catalyst of Example 6 was used to isomerize the slack wax of Table XI at 500 psig, 0.3 LHSV, and 8M SCF/bbl once-through H_2 . The results are set forth in Table XVII.

Example 8

The catalyst of Example 6 was mixed with a 10-fold excess of 5 wt.% $Mg\ CO_3$ in water, filtered, dried for 18 hours at 93°C, and calcined for 12 hours at 538°C. The Mg content was 22.7 wt.%. This catalyst was used to isomerize the slack wax of Table XI at 0.3 LHSV and 8 MSCF/bbl H_2 , both at 500 psig and 160 psig. The results are set forth in Table XVIII, showing a higher yield for this catalyst than

This is the replacement sheet

Date: 30 OCT 1996

TABLE XVII

Isomerizing Slack Wax from 900°F+ Hydrocracked VGO
at 500 psig, 0.3 LHSV and 8 M SCF/bbl H₂ over Pt/ZSM-22

Catalyst Temperature, °F	700°F+ Yield, Wt. %	Pour/Cloud, °C	Viscosity at 40/100°C, cSt	VI
600	53.4	-3/+9	59.64/9.363	138
620	51.3	-18/<-63	61.50/9.442	134
640	52.4	-30/<-63	57.97/8.971	133

This is the replacement sheet

Date: 30 OCT 1996

TABLE XVIII

Isomerizing Slack Wax from 900°F+ Hydrocracked
VGO at 0.3 LHSV and 8 M SCF/bbl H₂ over Pt-Mg/ZSM-22

Pressure psig	Catalyst Temperature, °F	700°F+ Yield, Wt. %	Pour/Cloud, °C	Viscosity at 40/100°C, cSt	VI
500	645	63.3	-18/+2	55.09/8.990	143
	660	61.8	-24/<-63	54.08/8.835	142
160	640	76.1	-27/-4	45.55/8.003	149
	660	69.5	-39/-8	46.10/7.886	142

This is the replacement sheet

Date:

30 OCT 1996

that of Example 6 without Mg. The beneficial effect of low pressure on yield is also shown.

Example 9

The catalyst of Example 6 was used to isomerize a deoiled slack wax derived from a 900°F+ solvent refined vacuum gas oil (Table XIX). Conditions were the same as Example 7. The results are set forth in Table XX.

Example 10

The catalyst of Example 8 was used to isomerize a slack wax (not deoiled) derived from a 700-800°F solvent refined vacuum gas oil (the same used to prepare the feed of Table XII). Inspections of the feed are given in Table XXI. Isomerization conditions were the same as in Example 7. The results are set forth in Table XXII.

Example 11

ZSM-23 was prepared as in U.S. Patent No. 4,076,842, and identified as such by X-ray diffraction analysis after calcination at 1000°F in air. It was exchanged four times with excess NH_4NO_3 and calcined again at 1000°F. The sieve was impregnated with 0.5% Pt and calcined in the same manner as the catalyst of Example 1.

This is the replacement sheet

Date: 30 OCT 1996

TABLE XIX

Deoiled Slack Wax from 900°F+ Solvent Refined VGO

Gravity, °API	36.7
N, ppm	12
S, ppm	326
Viscosity, cSt, 100°C	7.307
70°C	14.03

Simulated Distillation, LV%, °F

ST/5	47/678
10/30	808/899
50	931
70/90	965/1011
95/99	1035/1090

This is the replacement sheet

Date: 30 OCT 1996

TABLE XX

Isomerizing Deoiled Slack Wax from 900°F+ Solvent Refined
Oil at 0.3 LHSV, 500 psig, and 8 M SCF/bbl H₂ over Pt/ZSM-22

Catalyst Temperature, °F	700°F+ Yield, Wt. %	Pour/Cloud, °C	Viscosity at 40/100°C, cst	VI
665	54.9	-10/-6	44.67/7.928	150
680	54.9	-24/<-63	48.11/8.170	143
700	51.0	-33/-4	41.30/7.442	148

This is the replacement sheet

Date: 30 OCT 1996

TABLE XXI

Slack Wax From 700-800°F+ Solvent Refined VGO

Gravity, °API	40.0
N, ppm	20
S, ppm	300
Viscosity, 100°C, cSt	3.246
70°C	5.482
Pour Point, °C	+42

Simulated Distillation, LV%, °F

ST/5	575/670
10/30	685/723
50	759
70/90	794/842
95/99	861/902

This is the replacement sheet

Date: 30 OCT 1996

TABLE XXII

Isomerizing Slack Wax from 700-800°F Solvent Refined
YGO at 0.3 LHSV, 500 psig, and 8 M SCF/bbl H₂ over Pt-Mg/ZSM-22

Catalyst Temperature, °F	700°F+ Yield, Wt. %	Pour/Cloud, °C	Viscosity at 40/100°C, cSt	VI
640	49.1	-9/-6	14.55/3.893	174
700	45.1	-24/<-63	14.66/3.594	130
720	42.8	-33/<-63	14.78/3.893	169

This is the replacement sheet

Date: 30 OCT 1996

Example 12

The catalyst of Example 11 was used to isomerize the feed of Table XI at 0.3 LHSV, 500 psig, and 8 MSCF/bbl H_2 . The results are set forth in Table XXIII.

Example 13

The catalyst of Example 8 was used to isomerize a $C_{30}+$ normal alphaolefin wax (Table XXIV) at 0.3 LHSV and 8 MSCF/bbl H_2 , both at 500 psig and 300 psig. The results are set forth in Table XXV.

This is the replacement sheet

Date:

30 OCT 1966

TABLE XXIII

Isomerizing Slack Wax from 900°F+ Hydrocracked VGO
at 500 psig, 0.3 LHSV, and 8 M SCF/bbl H₂ over Pt/ZSM-23

Catalyst Temperature, °F	700°F+ Yield, Wt. %	Pour/Cloud, °C	Viscosity at 40/100°C, cSt	VI
610	50.3	+9/+10	48.87/7.887	130
630	43.3	-27/-14	47.53/7.445	120

This is the replacement sheet

Date: 30 OCT 1996

TABLE XXIV

C30+ Normal Alphaolefin Wax

Pour Point, °C	+72
Viscosity, 100°C, cSt	7.478

Simulated Distillation, LV%, °F

ST/5	802/807
10/30	809/844
50	893
70/90	931/1026
95/99	1087/1139

This is the replacement sheet

Date: 30 OCT 1996

TABLE XXV

Isomerizing C₃₀+ Normal Alphaolefin Wax
at 0.3 LHSV, and 8 M SCF/bbl H₂ over Pt-Mg/ZSM-22

Pressure psig	Catalyst Temperature, °F	700°F+ Yield, Wt. %	Pour/Cloud, °C	Viscosity at 40/100°C, cSt	VI
500	685	44.4	-48/-10	51.88/9.383	166
	700	41.9	-57/-26	54.42/9.467	158
300	640	52.8	-36/-4	47.60/8.998	173
	660	47.9	-51/<-63	50.87/9.192	165
	685	46.5	<-63/<-63	51.67/9.063	157

This is the replacement sheet

Date: 30 OCT 1996

While the invention has been described in connection with specific embodiments thereof, it will be understood that it is capable of further modification, and this application is intended to cover any variations, uses, or adaptations of the invention following, in general, the principles of the invention and including such departures from the present disclosure as come within known or customary practice in the art to which the invention pertains and as may be applied to the essential features hereinbefore set forth, and as fall within the scope of the invention and the limits of the appended claims.

This is the replacement sheet

Date: 30 OCT 1996

Claims

That Which Is Claimed Is:

1. A process for producing lube oil comprising isomerizing a waxy feed 1) having greater than about 50% wax and/or 2) exhibiting a high pour point above about 0°C and having greater than about 70% paraffinic carbon over a catalyst comprising a molecular sieve having generally oval 1-D pores having a minor axis between about 4.2 Å and about 4.8 Å and a major axis between about 5.4 Å and about 7.0 Å and at least one Group VIII metal at a pressure of from about 15 psig to about 2000 psig.
2. The process of claim 1, wherein said waxy feed contains at least about 80% wax.
3. The process of claim 1, wherein said waxy feed contains at least about 90% wax.
4. The process of claim 1, wherein said waxy feed contains at least about 80% paraffinic carbon.
5. The process of claim 1, wherein said waxy feed contains at least about 90% paraffinic carbon.



This is the replacement sheet

Date: 30 OCT 1996

6. The process of claim 1, wherein said waxy feed is selected from the group consisting of gas oil, lubricating oil stock, synthetic oil, foote oil, slack wax, deoiled wax, normal alphaolefin wax and microcrystalline wax.

7. The process of claim 1, wherein said molecular sieve is selected from the group consisting of SAPO-11, SAPO-31, SAPO-41, ZSM-22, ZSM-23, and ZSM-35 and said metal compound is selected from the group consisting of at least one of platinum and palladium.

8. The process of claim 7 wherein said molecular sieve further comprises a platinum hydrogenation component.

9. The process of claim 1, wherein said molecular sieve is a SAPO-11 crystalline silicoaluminophosphate.

10. The process of claim 9 wherein said molecular sieve further comprises a platinum hydrogenation component.

11. The process of claim 1, wherein isomerization is carried out at a temperature of from about 200°C to about 475°C and a pressure of from about 15 to about 2000 psig.

12. The process of claim 11, wherein said pressure is from about 50 to about 1000 psig.

This is the replacement sheet



* C L M S *

Date: 30 OCT 1996

13. The process of claim 11, wherein the temperature is from about 250°C to about 450°C and the pressure is from about 100 psig to about 600 psig.

14. The process of claim 1, wherein the liquid hourly space velocity during isomerization is from about 0.1 to about 20.

15. The process of claim 14, wherein the liquid hourly space velocity is from about 0.1 to about 5.

16. The process of claim 1, wherein isomerization is carried out in the presence of hydrogen.

17. The process of claim 1, further comprising hydrofinishing the isomerized lube oil.

18. The process of claim 1, wherein hydrofinishing is carried out at a temperature of from about 190°C to about 340°C and a pressure of from about 400 psig to about 3000 psig.

19. The process of claim 18, wherein hydrofinishing is carried out in the presence of a metallic hydrogenation catalyst.

20. The process of claim 1, wherein said waxy feed has an organic nitrogen content of less than about 50 ppmw.

This is the replacement sheet

Date:

30 OCT 1995



21. The process of claim 20, wherein said organic nitrogen content is less than about 10 ppmw.

22. The process of claim 1, wherein the waxy feed comprises $C_{20}+$ paraffins and boils above about 230°C.

23. The process of claim 22, wherein the waxy feed boils above about 315°C.

24. A lube oil prepared by the process of claim 1.

25. A lube oil prepared by the process of claim 1 having a viscosity index of from about 120 to about 180 and a pour point of from less than about -63°C to about -9°C.

26. The lube oil of claim 25, wherein the viscosity index is at least about 140 and the pour point is no greater than about -12°C.

27. The lube oil of claim 25, wherein the viscosity index is at least about 120 and the pour point is no greater than about -40°C.

28. The process of claim 1, wherein said molecular sieve is a ZSM-22.

29. The process of claim 28, wherein said molecular sieve further comprises a platinum hydrogenation component.

This is the replacement sheet

Date: 30 OCT 1996



30. The process of claim 1, wherein said catalyst contains a Group IIA metal.

31. A process for producing oil comprising isomerizing a waxy feed 1) having greater than about 50% wax and/or 2) exhibiting a high pour point above about 0°C and having greater than about 70% paraffinic carbon over a catalyst comprising (a) an intermediate pore size nonzeolitic molecular sieve containing AlO_2 and PO_2 tetrahedral oxide units and (b) at least one Group VIII metal at a pressure of from about 15 psig to about 2000 psig.

32. The process of claim 31, wherein said waxy feed contains at least about 80% wax.

33. The process of claim 31, wherein said waxy feed contains at least about 80% paraffinic carbon.

34. The process of claim 31, wherein said waxy feed is selected from the group consisting of gas oil stock, lubricating oil stock, synthetic oil, foote's oil, slack wax, deoiled wax, normal alphaolefin wax and microcrystalline wax.

35. The process of claim 31, wherein the liquid hourly space velocity during isomerization is from about 0.1 to about 20.

36. The process of claim 31, further comprising hydrofinishing the isomerized lube oil.

This is the replacement sheet



Date: 30 OCT 1996

37. A lube oil prepared by the process of claim 31.

38. A lube oil having a pour point below about -24°C and a viscosity index above 125.

39. A lube oil as set forth in claim 38 having a viscosity index of from about 125 to about 180 and a pour point of from about -63°C to -24°C .

40. The lube oil of claim 39, wherein the viscosity index is at least about 130.

41. The lube oil of claim 38, wherein the viscosity index is at least about 140 and the pour point is no greater than about -30°C .

42. The lube oil of claim 41, wherein the pour point is no greater than about -40°C .



This is the replacement sheet

Date: 30 OCT 1996

**WAX ISOMERIZATION USING
CATALYST OF SPECIFIC PORE GEOMETRY**

Abstract Of The Disclosure

The present invention relates to a process for producing a lube oil having a low pour point and excellent viscosity and viscosity index comprising isomerizing a waxy feed over a catalyst comprising a molecular sieve having generally oval 1-D pores having a minor axis between about 4.2 Å and about 4.8 Å and a major axis between about 5.4 Å and about 7.0 Å and at least one group VIII metal. SAPO-11, SAPO-31, SAPO-41, ZSM-22, ZSM-23 and ZSM-35 are examples of useful catalysts.

(no appropriate figure)

This is the replacement sheet

Date: 30 OCT 1996

1/2

FIG. 1


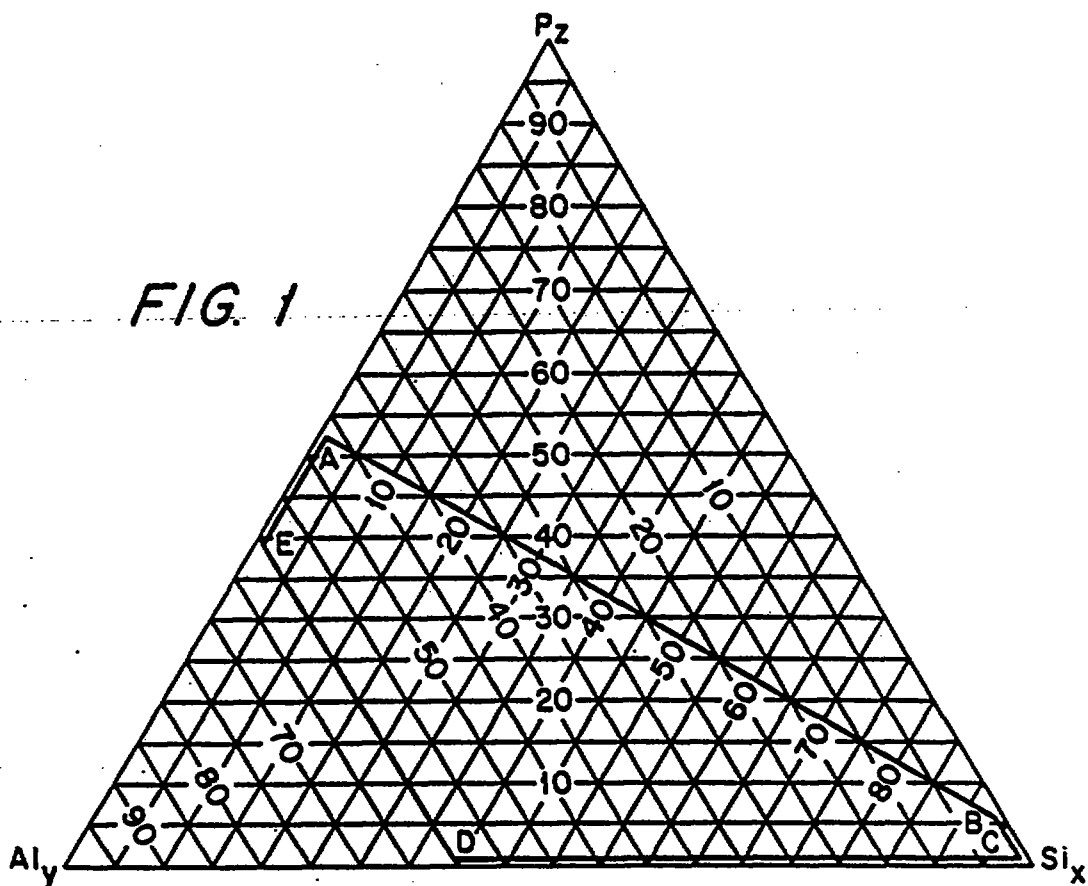


FIG. 2

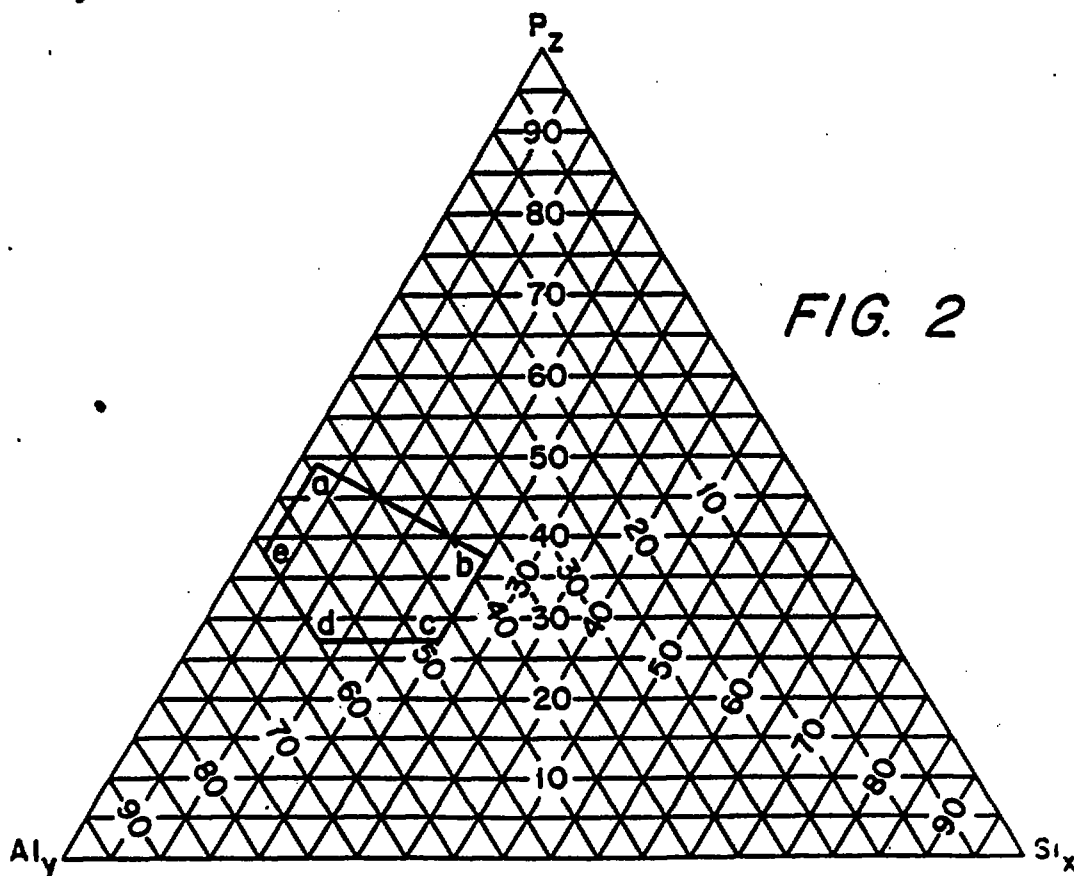


This is the replacement sheet

Date: 30 OCT 1996

8-2227080

FIG. 3

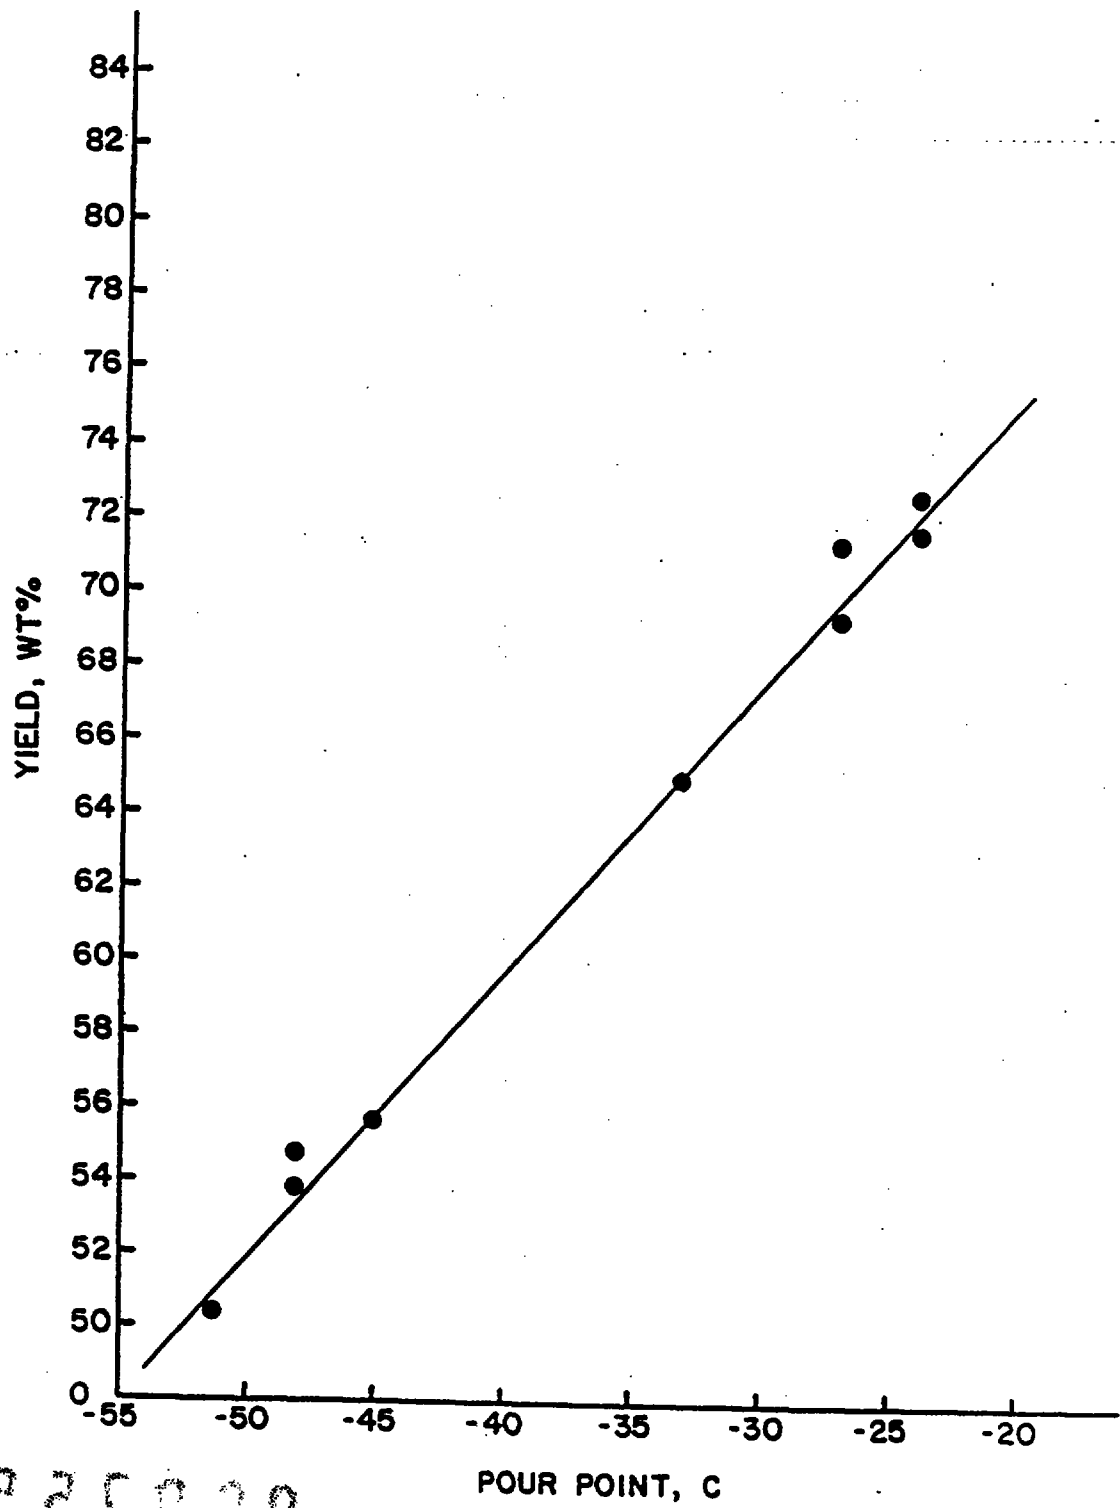

8-5225030

This is the replacement sheet

Date: 30 OCT 1996