



(51) **International Patent Classification:**
H04B 7/026 (2017.01) *H04W 84/04* (2009.01)
H04W 4/80 (2018.01)

(21) **International Application Number:**
PCT/SG2020/050135

(22) **International Filing Date:**
13 March 2020 (13.03.2020)

(25) **Filing Language:** English

(26) **Publication Language:** English

(30) **Priority Data:**
10201902330U 15 March 2019 (15.03.2019) SG

(71) **Applicants:** NATIONAL UNIVERSITY OF SINGAPORE [SG/SG]; 21 Lower Kent Ridge Road, Singapore 119077 (SG). SUBNERO PTE LTD [SG/SG]; The

Hangar, I-Cube, 21 Heng Mui Keng Terrace, #01-01/02, Singapore 119613 (SG).

(72) **Inventors:** ANJANGI, Prasad; c/o Subnero Pte Ltd, The Hangar, I-Cube, 21 Heng Mui Keng Terrace, #01-01/02, Singapore 119613 (SG). CHITRE, Mandar; c/o National University of Singapore, Faculty of Engineering, Department of Electrical and Computer Engineering, 21 Lower Kent Ridge Road, Singapore 119077 (SG). IGNATIUS, Manu; c/o Subnero Pte Ltd, The Hangar, I-Cube, 21 Heng Mui Keng Terrace, #01-01/02, Singapore 119613 (SG). PENDHARKAR, Chinmay Prafulla; c/o Subnero Pte Ltd, The Hangar, I-Cube, 21 Heng Mui Keng Terrace, #01-01/02, Singapore 119613 (SG).

(74) **Agent:** VIERING, JENTSCHURA & PARTNER LLP; P.O. Box 1088, Rochor Post Office, Rochor Road, Singapore 911833 (SG).

(54) **Title:** A RECEIVER SYSTEM AND A METHOD FOR RECEIVING A TRANSMITTED SIGNAL VIA A LONG-RANGE LINK

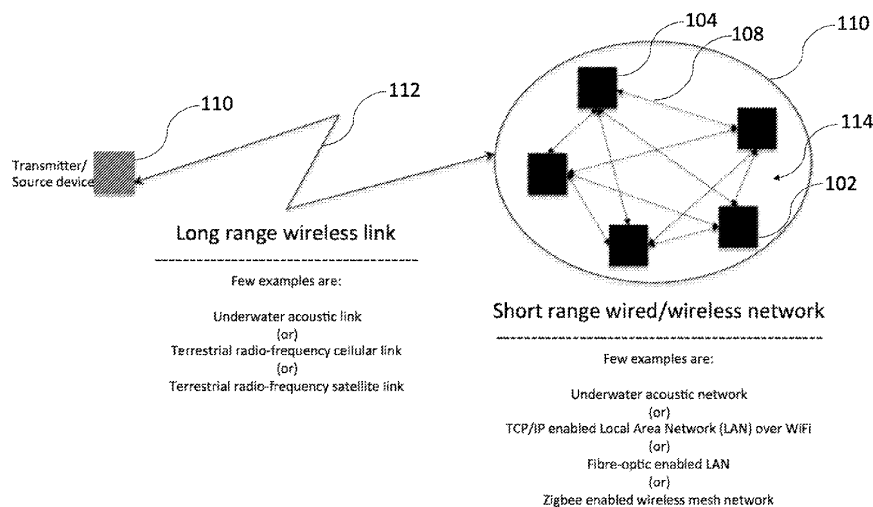


Figure 1

(57) **Abstract:** A receiver system and a method for receiving a transmitted signal via a long-range link. The system comprises a plurality of interconnected devices in a short-range network, the plurality of devices including at least one main device and one or more assisting devices, the at least one main device and the one or more assisting devices each configured to receive the transmitted signal via the long-range link; wherein the one or more assisting devices are configured to transmit a relayed signal representing the received transmitted signal at the assisting device to the at least one main device via the short-range network; and wherein the at least one main device is configured to generate output data representing the content of the transmitted signal based on the transmitted signal received at the at least one main device and the one or more relayed signals received from the one or more assisting devices.

[Continued on next page]

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*