



(51) International Patent Classification:

B01L 3/14 (2006.01) **B65D 51/00** (2006.01)
B65D 41/20 (2006.01) **B65D 51/22** (2006.01)

(21) International Application Number:

PCT/EP2011/073460

(22) International Filing Date:

20 December 2011 (20.12.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1060947 21 December 2010 (21.12.2010) FR
61/452,426 14 March 2011 (14.03.2011) US

(71) Applicant (for all designated States except US): **BIO-RAD INNOVATIONS** [FR/FR]; 3 Boulevard Raymond Poincaré, F-92430 Marnes la Coquette (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FOURNIER, Laurent** [FR/FR]; 4 Rue du Pont Colbert, F-78000 Versailles (FR). **VENTURI, Gilles** [FR/FR]; 34 Route de Port Royal des Champs, F-78114 Magny-les-Hameaux (FR).


(74) Agents: **BESNARD, Christophe** et al.; Cabinet Beau de Lomenie, 158 Rue de l'Université, F-75340 Paris Cedex 07 (FR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: CAP FOR SEALING A CONTAINER

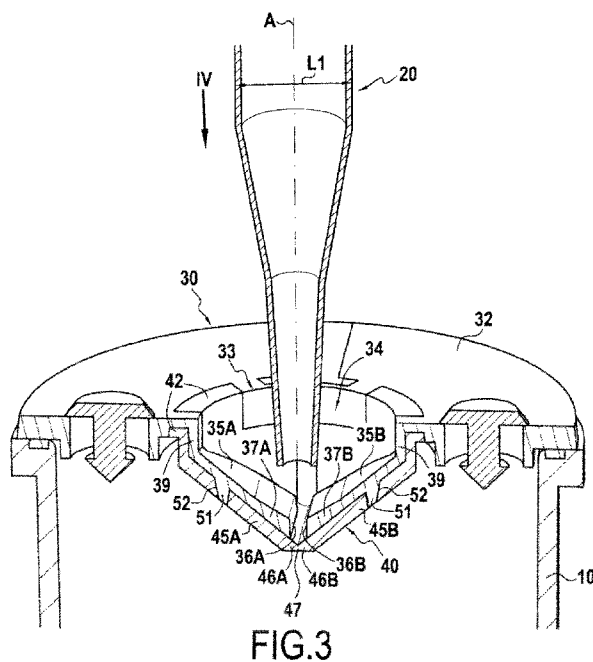

(57) Abstract: The present invention relates to a cap comprising a body (32), an opening (34) passing through the cap (30) and adapted in turn to be passed through by at least one product transfer member (20), and a membrane (40) which, at rest, covers the opening (34). The membrane (40) has a main portion that extends through the opening (34) and defines two inclined faces (45A, 45B), each inclined face having a distal edge (46A, 46B). The two inclined faces (45A, 45B) form a dihedron when the membrane (40) is at rest, the distal edges (46A, 46B) of the two inclined faces coming together at the apex (47) of the dihedron. The cap comprises at least two flaps (35A, 35B) that extend through the opening (34), above the membrane (40), the two inclined faces (45A, 45B) of the membrane being respectively covered by two flaps (35A, 35B), each flap having a free edge (36A, 36B) that extends along the distal edge of the corresponding inclined face.



Published:

— *with international search report (Art. 21(3))*