



- (51) **International Patent Classification:** Not classified
- (21) **International Application Number:**
PCT/DK2011/050435
- (22) **International Filing Date:**
14 November 2011 (14.11.2011)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
PA 2010 70482 12 November 2010 (12.11.2010) DK
- (71) **Applicant (for all designated States except US):** ALFA
LAVAL CORPORATE AB [SE/SE]; Box 73, S-221 00
Lund (SE).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** REIFF, Henrik
[DK/DK]; Syrenvænget 21, DK-3520 Farum (DK).
MADSEN, Bent [DK/DK]; Snøgegaardsvej 29, DK-2820
Gentofte (DK).

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- (74) **Agents:** JØRGENSEN, Bjørn, Barker et al.; Awapatent A/S, Rigersgade 11, DK-1316 København K (DK). — as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

[Continued on next page]

(54) **Title:** A CENTRIFUGAL SEPARATOR

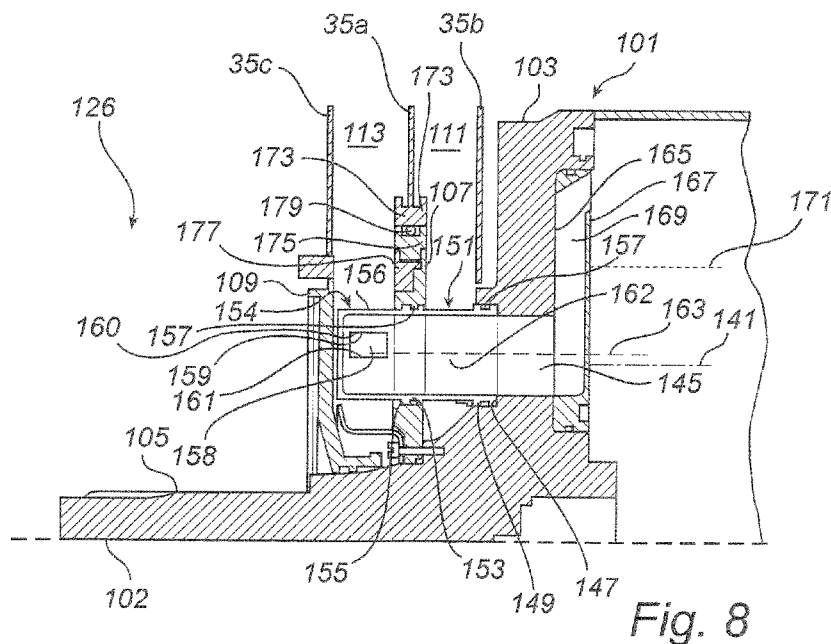


Fig. 8

(57) **Abstract:** A centrifugal separator for liquids with two phases of different density comprises a bowl with a base (103) defining a first rear area (111) in a casing. At least two outlet passages (145, 169) extend through the base (103). A first outlet passages communicates with a first outlet opening discharging liquid in the first rear area (111), and the second outlet passages (145) communicates with a second outlet opening (158) discharging liquid in a second rear area (113) rear of said first rear area (111). A flange (107) attached to the bowl and a partition (35a) of the casing with an annular sealing (175, 179) in between separates the first and the second rear area.



Published:

- *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*