



(51) International Patent Classification:
F42B 12/40 (2006.01)

(21) International Application Number:
PCT/US2011/057485

(22) International Filing Date:
24 October 2011 (24.10.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/406,152 24 October 2010 (24.10.2010) US

(71) Applicant (for all designated States except US):
CYALUME TECHNOLOGIES, INC. [US/US]; 96
Windsor Street, West Springfield, MA 01089 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **CRANOR, Earl** [US/
US]; 24 Lincoln Park, Longmeadow, MA 01106 (US).

(74) Agent: **GARRETT, Arthur, S.**; Finnegan, Henderson,
Farabow, Garrett & Dunner, LLP, 901 New York Av-
enue, N.W., Washington, DC 20001-4313 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: MULTI-MARKER MARKING SYSTEM

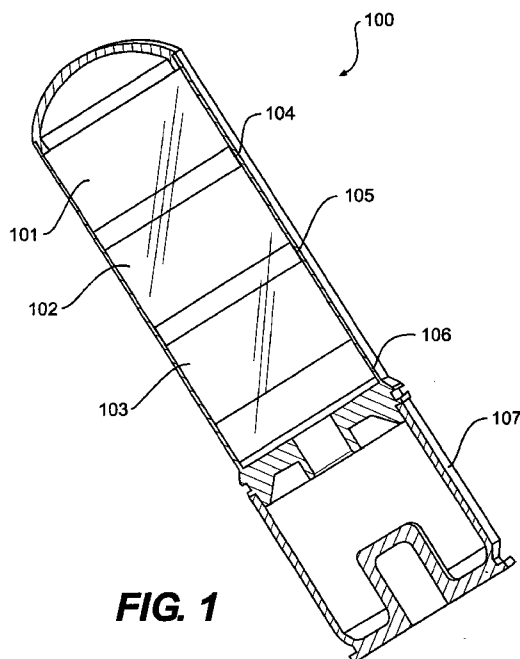


FIG. 1

(57) Abstract: The disclosure relates to a marking system comprising at least one module (100), which comprises at least two sections (101, 102), wherein the at least one module fails upon an expulsion charge initiation or a delayed expulsion charge (104, 105, 106) initiation, and wherein the at least two sections each independently comprise at least one system chosen from a fluorescent system, a thermal - generating system, and a chemical light system. In some embodiments, a section of a module as disclosed herein comprises a heat/light system that generates both heat and light signals. The heat/light system comprises at least one first part comprising at least one oxalate ester, at least one fluorescer, and at least one inorganic salt, and at least one second part comprising at least one peroxide and at least one catalyst.



Published:

— *with international search report (Art. 21(3))*