

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 October 2001 (11.10.2001)

PCT

(10) International Publication Number
WO 01/76016 A1

(51) International Patent Classification⁷: H01R 12/20

(21) International Application Number: PCT/US01/12231

(22) International Filing Date: 27 March 2001 (27.03.2001)

(25) **Filing Language:** English

(26) Publication Language: English

(30) Priority Data:
09/541,015 31 March 2000 (31.03.2000) US

(71) Applicant: TYCO ELECTRONICS CORPORATION
[US/US]; 2901 Fulling Mill Road, Middletown, PA 17057
(US).

(72) Inventor: LONG, Michael, David; 2530 Wicklow Drive,
Harrisburg, PA 17112 (US).

(74) Agents: KAPALKA, Robert, J. et al.; Tyco Technology Resources, Suite 450, 4550 New Linden Hill Road, Willmington, DE 19808 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published:

— *with international search report*

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CONNECTOR ASSEMBLY WITH STABILIZED MODULES

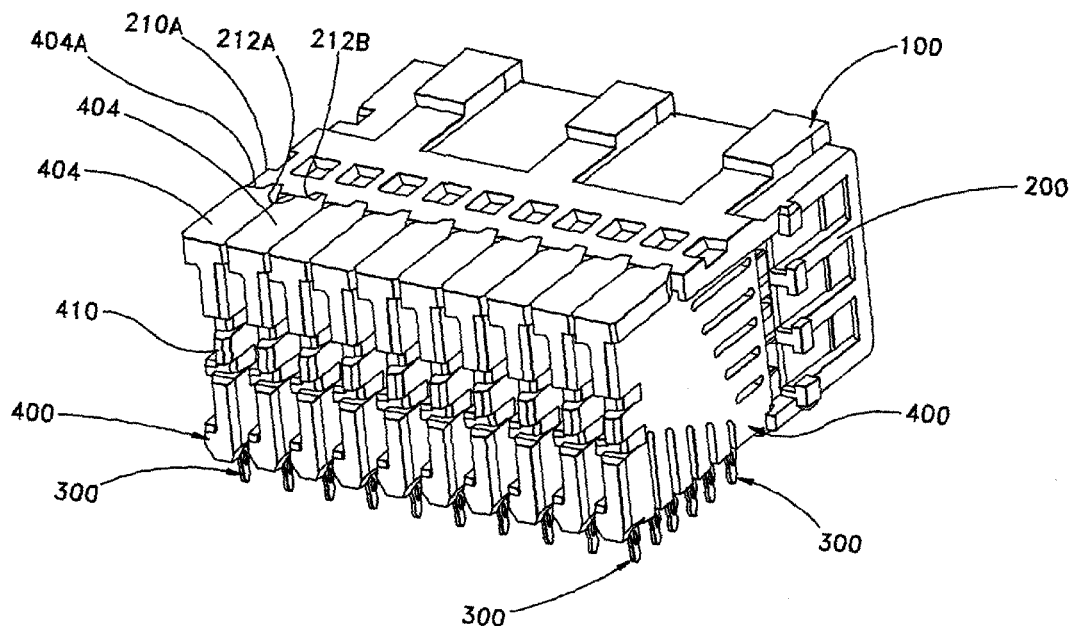

(57) Abstract: A connector assembly (100) includes a housing (200) receiving electrical terminals (300) that accompany insulating modules (400). The housing has a front mating end (204) and a rear (206), and cavities (202) that receive mating ends of the terminals through the rear of the housing. The housing has a first shroud (210A) projecting in a rearward direction. The first shroud has a rear edge (212) and notches (212B) disposed along the rear edge. Each of the modules has a wedge (404B) that is interfitted in a respective one of the notches, whereby the first shroud holds the modules in straight alignments relative to the housing.

WO 01/76016 A1