

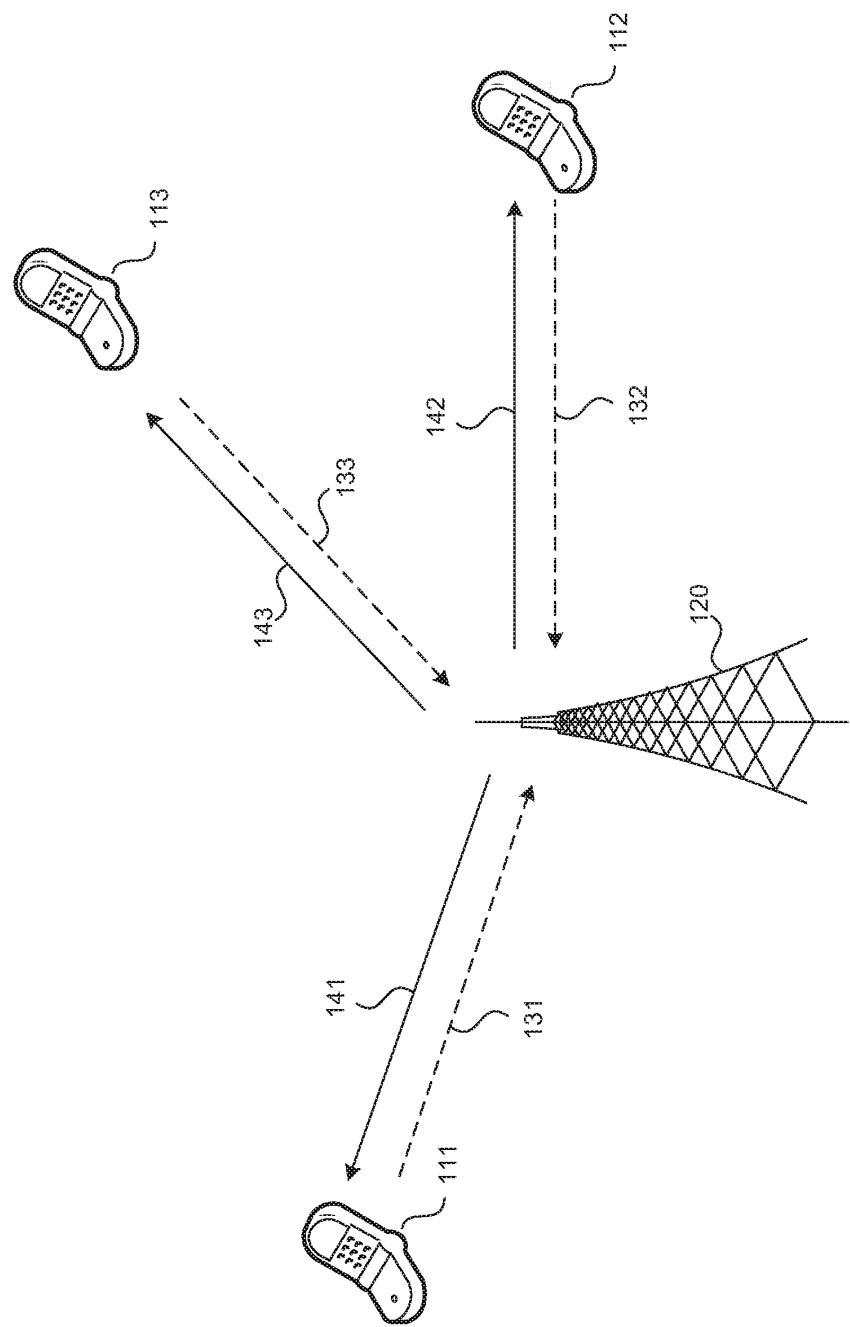


FIG. 1

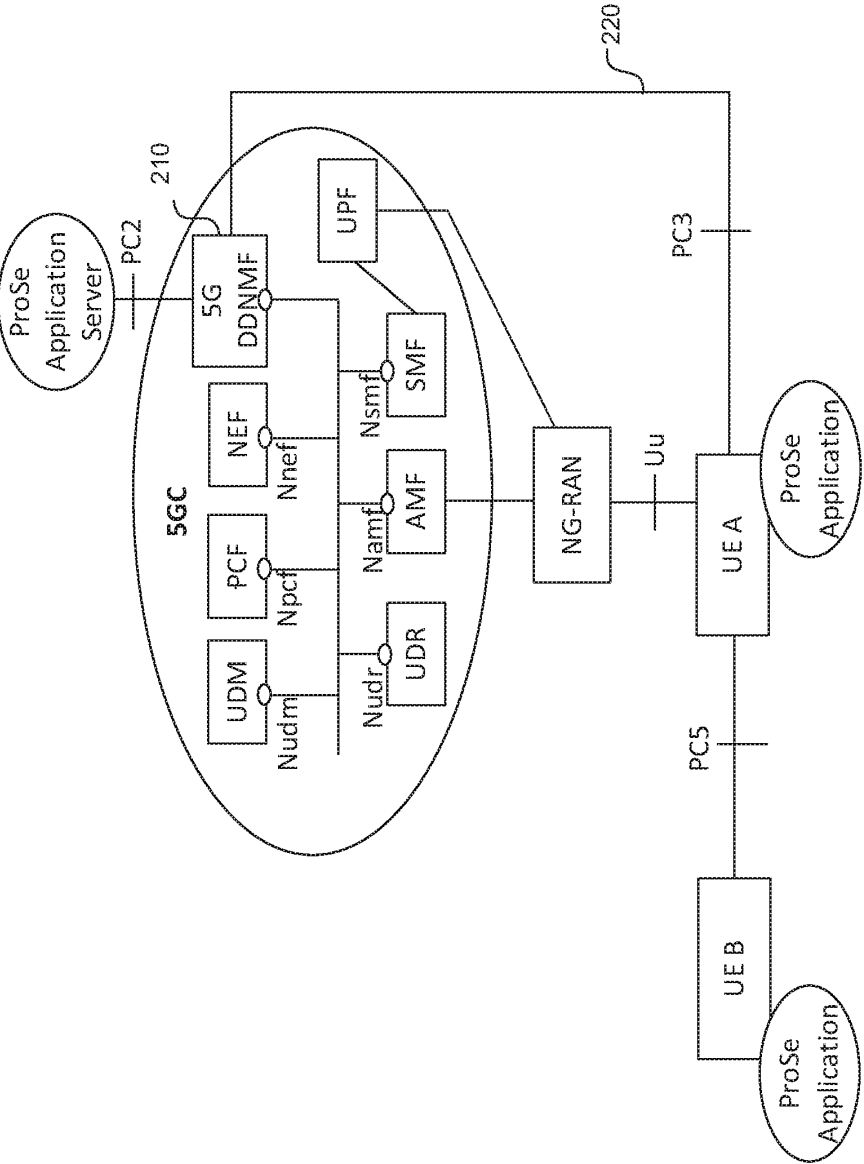


FIG. 2

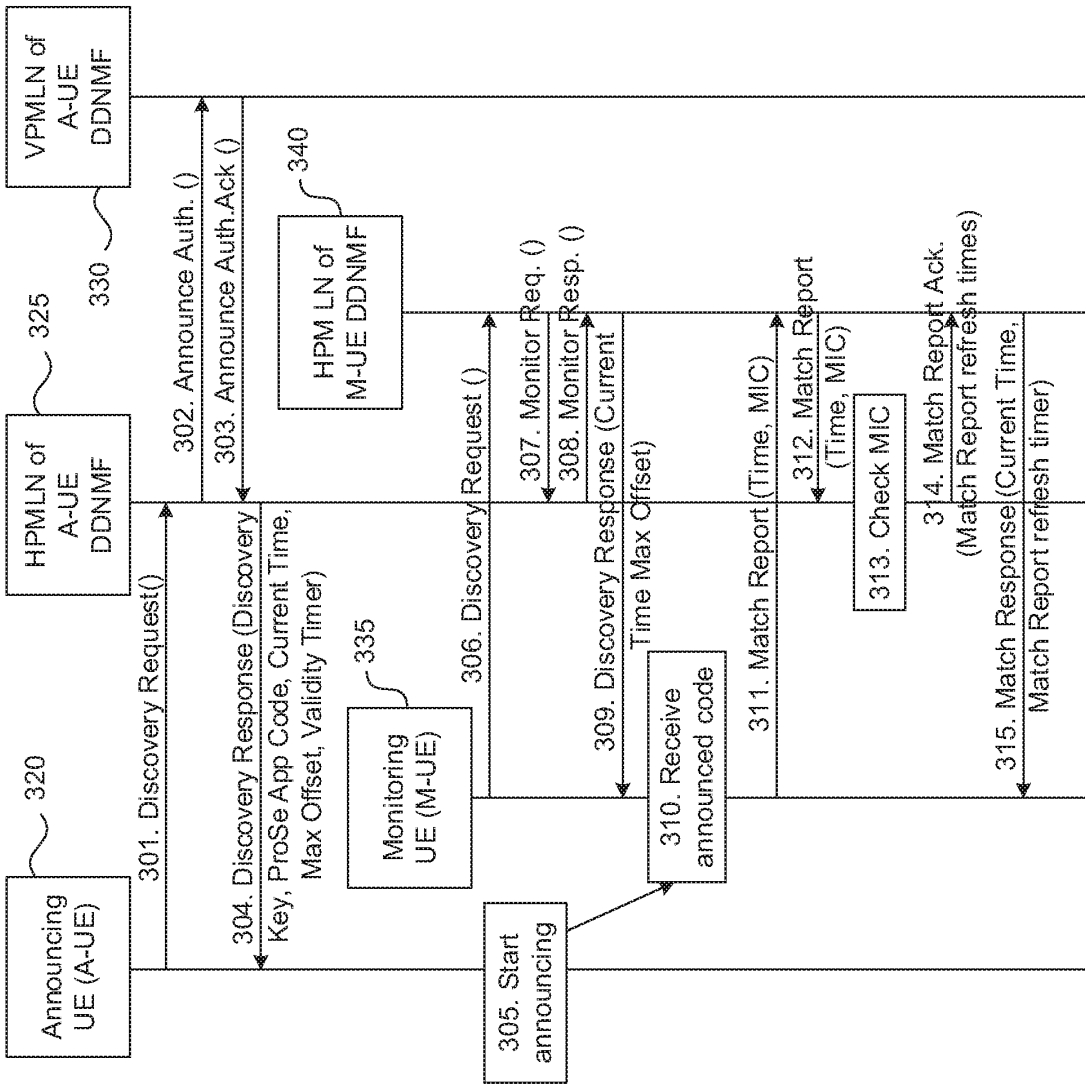


FIG. 3

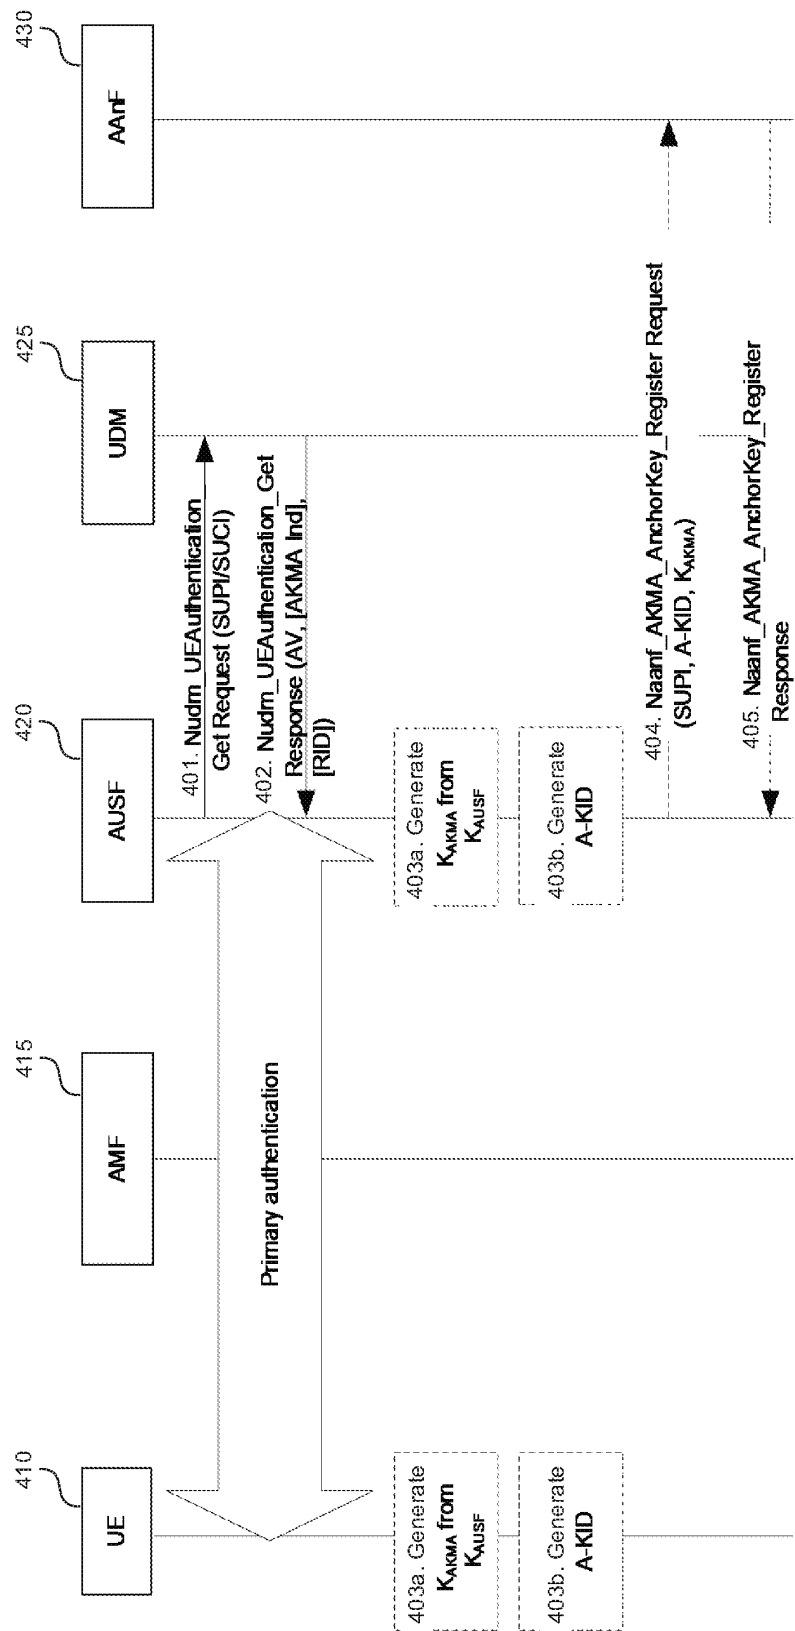


FIG. 4

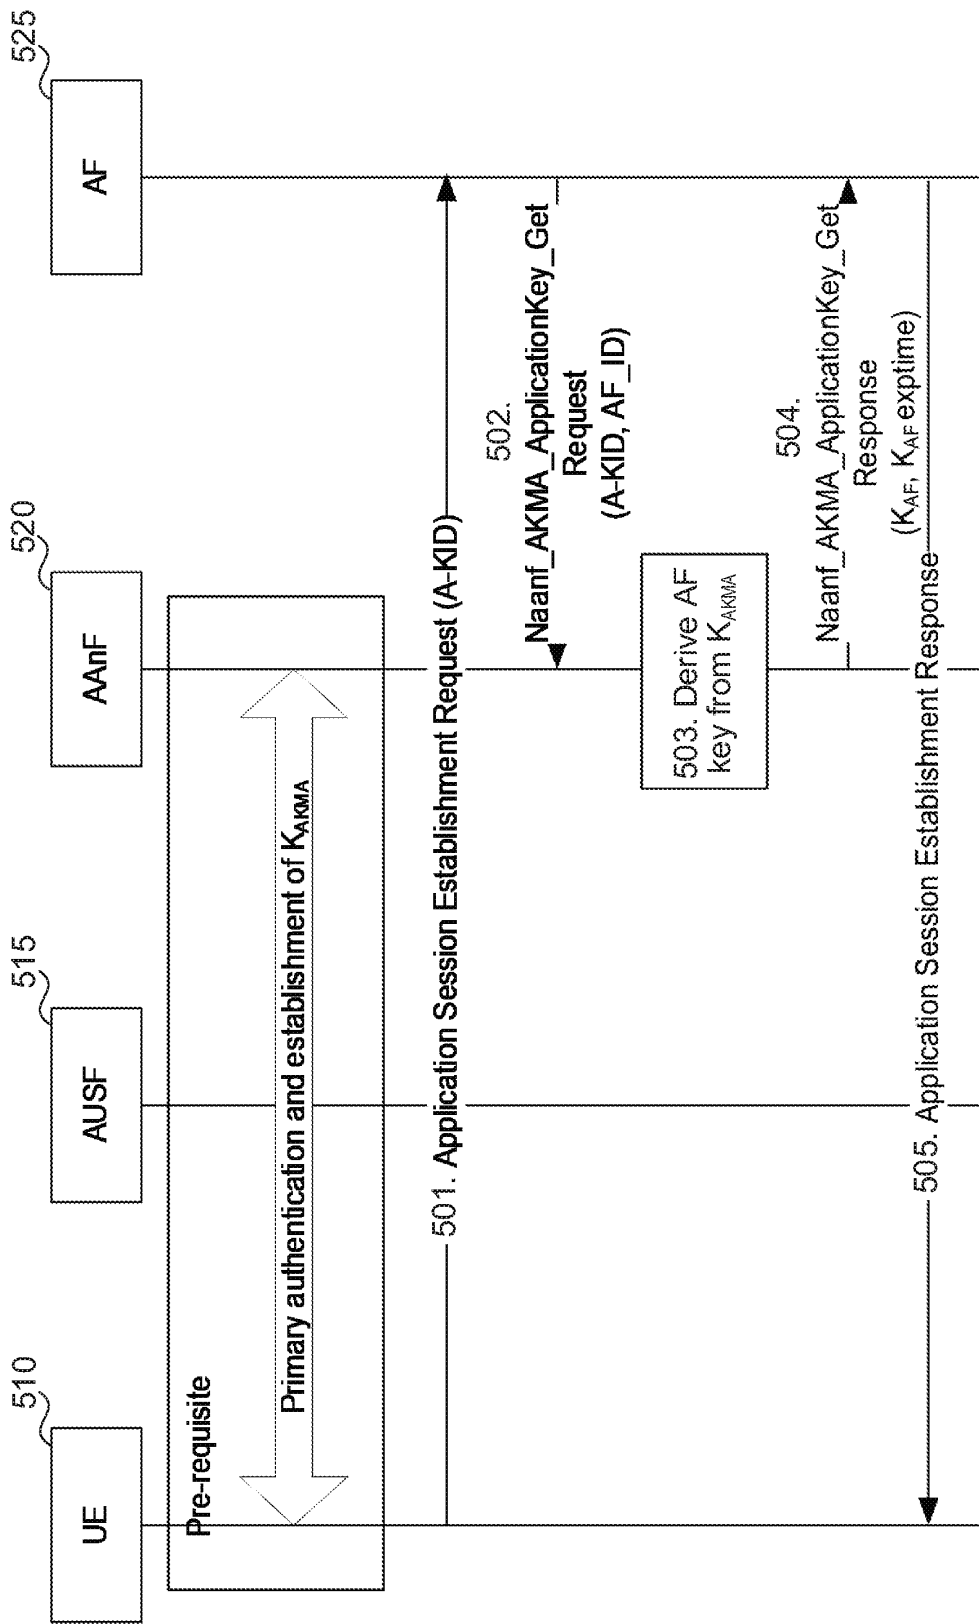


FIG. 5

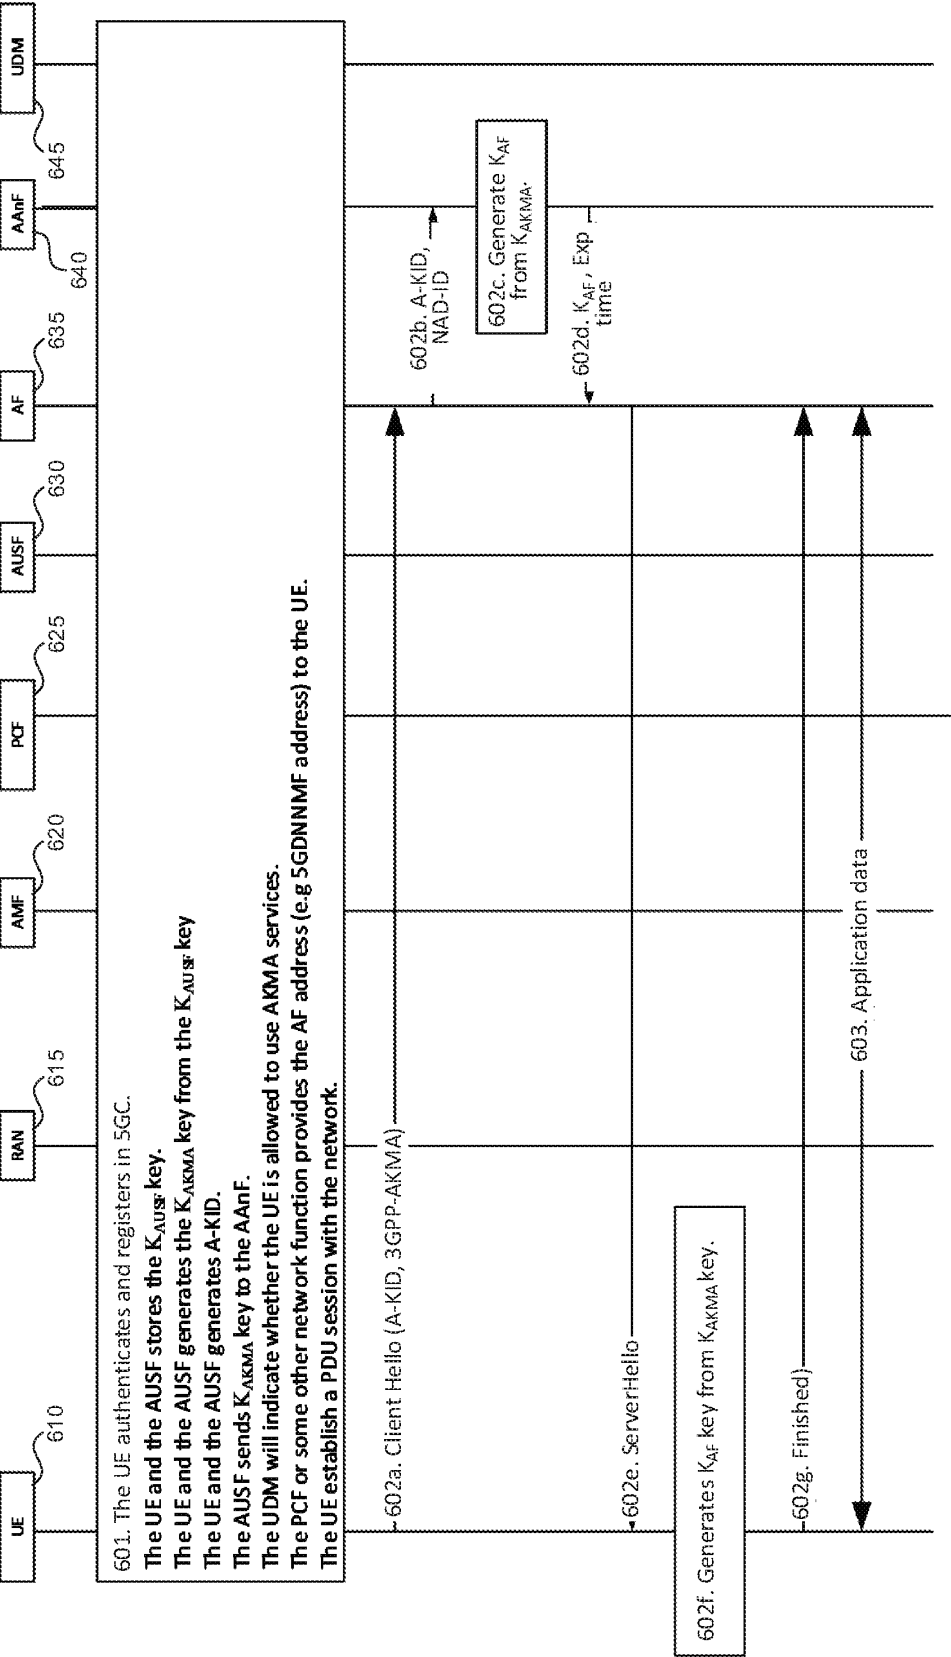


FIG. 6

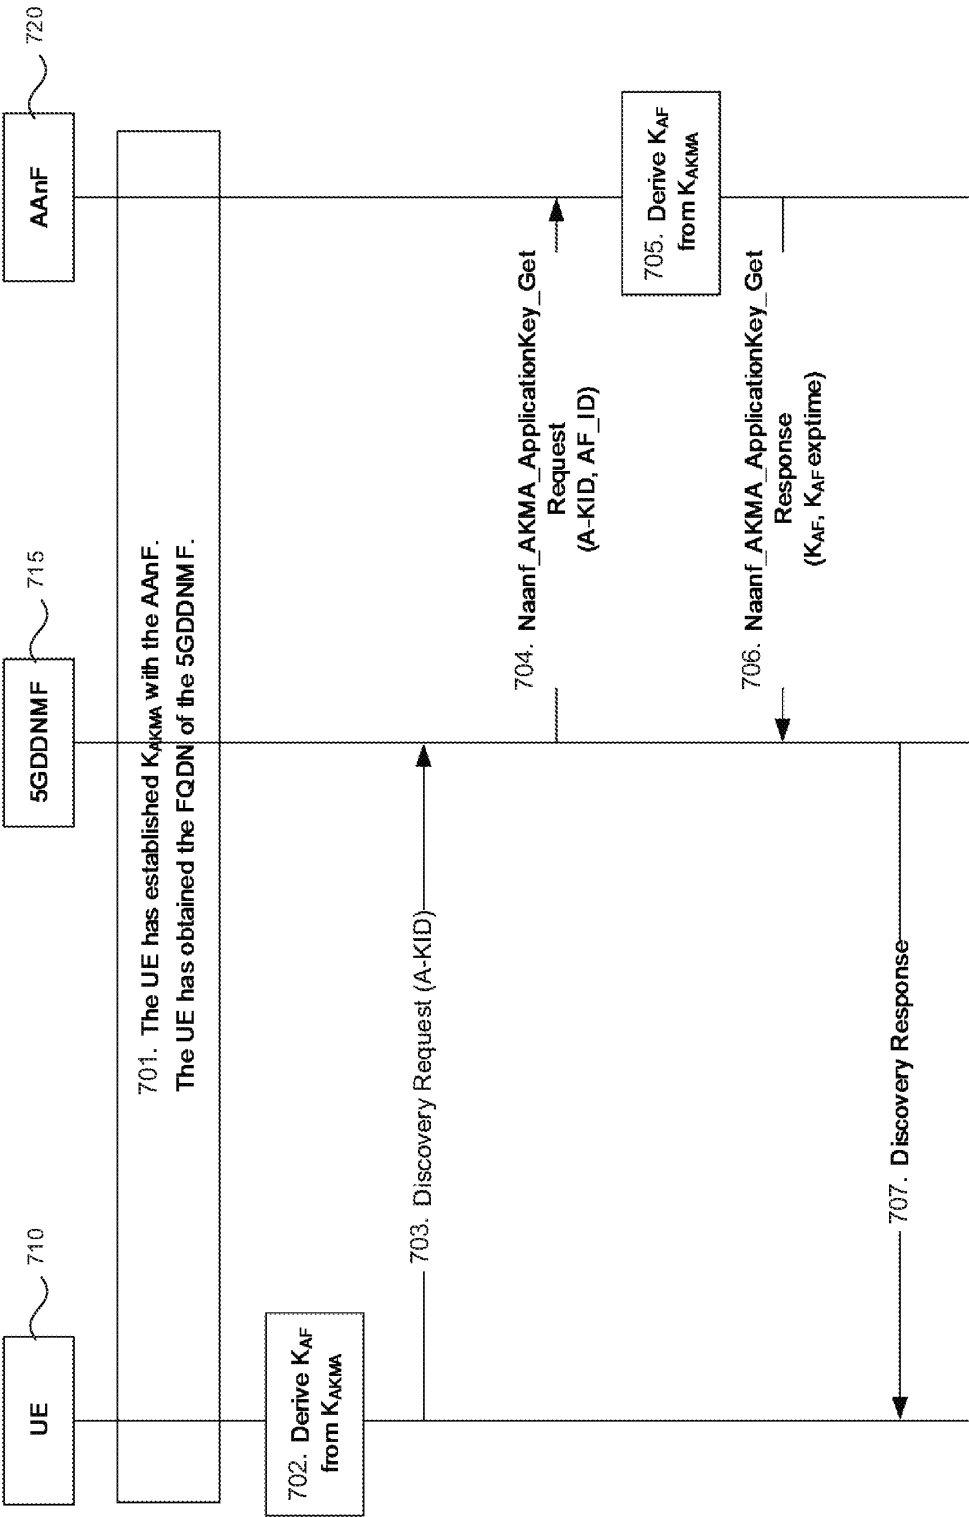


FIG. 7

800 →

Transmit, by a wireless device to a first network function, an encrypted and integrity-protected message,
wherein the encrypted and integrity-protected message is encrypted using a first key that is derived from a second key,
wherein the wireless device has established the second key using a communication with a second network function, and
wherein the encrypted and integrity-protected message is obtained by encrypting and integrity-protecting a message.

810

FIG. 8

900 →

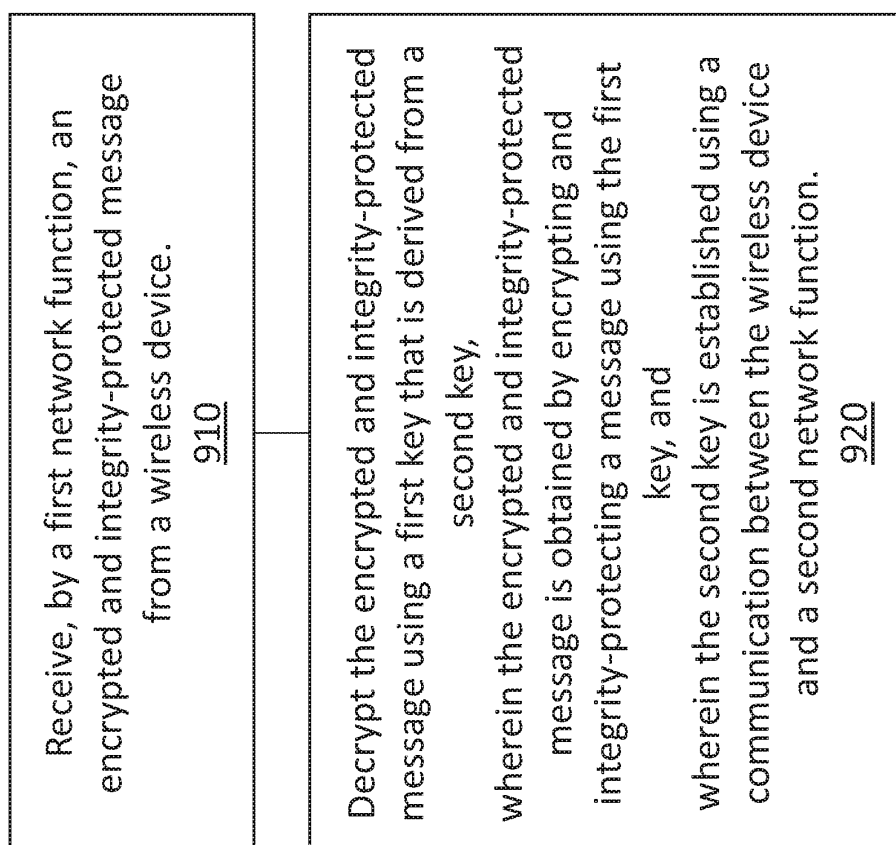


FIG. 9

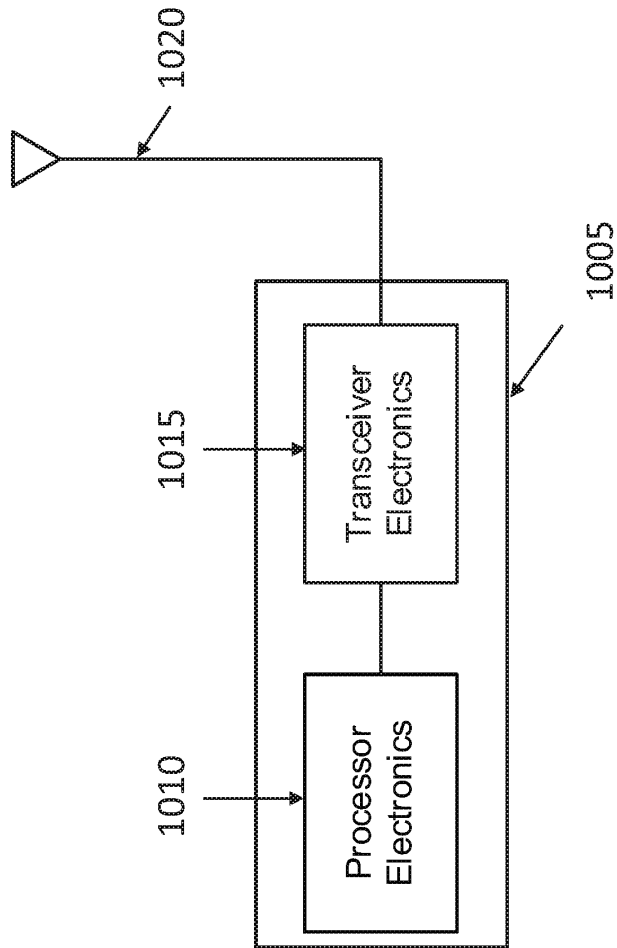


FIG. 10