

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
16 April 2009 (16.04.2009)

PCT

(10) International Publication Number
WO 2009/047382 A1

(51) International Patent Classification:
B66B 1/20 (2006.01)

(74) Agent: **KONE Corporation**; Patent Department, P.O.Box 677, FIN-05801 Hyvinkää (FI).

(21) International Application Number:
PCT/FI2008/000101

(22) International Filing Date:
12 September 2008 (12.09.2008)

(25) Filing Language: Finnish

(26) Publication Language: English

(30) Priority Data:
20070766 11 October 2007 (11.10.2007) FI

(71) Applicant (for all designated States except US): **KONE CORPORATION** [FI/FI]; Kartanontie 1, FIN-00330 Helsinki (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LAIHANEN, Pentti** [FI/FI]; Valtakatu 1, FIN-05800 Hyvinkää (FI). **TURPEINEN, Jukka** [FI/FI]; Lenkkitie 10, FIN-05200 Rajamäki (FI). **DE JONG, Johannes** [FI/FI]; Kauha-joenkuja 1, FIN-04430 Järvenpää (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,

[Continued on next page]

(54) Title: ELEVATOR SYSTEM

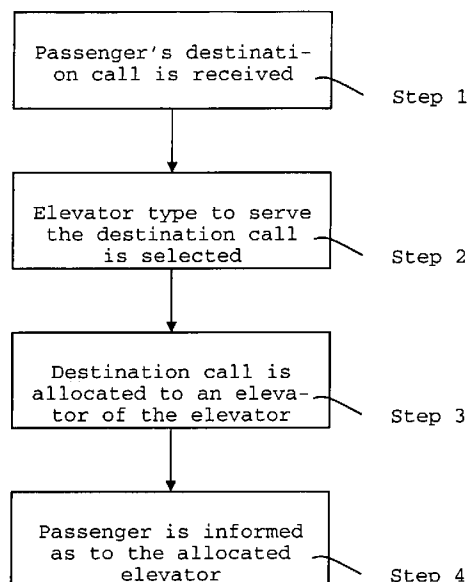


Fig. 2

(57) Abstract: The invention relates to a solution for the allocation of destination calls in an elevator system comprising one or more single-deck elevators and one or more multi-deck elevators, in which system the passenger enters a destination call via a destination call device. The destination call entered by the passenger is received, an elevator type to serve the destination call is selected on the basis of an elevator type selection criterion, and the destination call is allocated to an elevator consistent with the elevator type thus selected.

WO 2009/047382 A1



NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*