

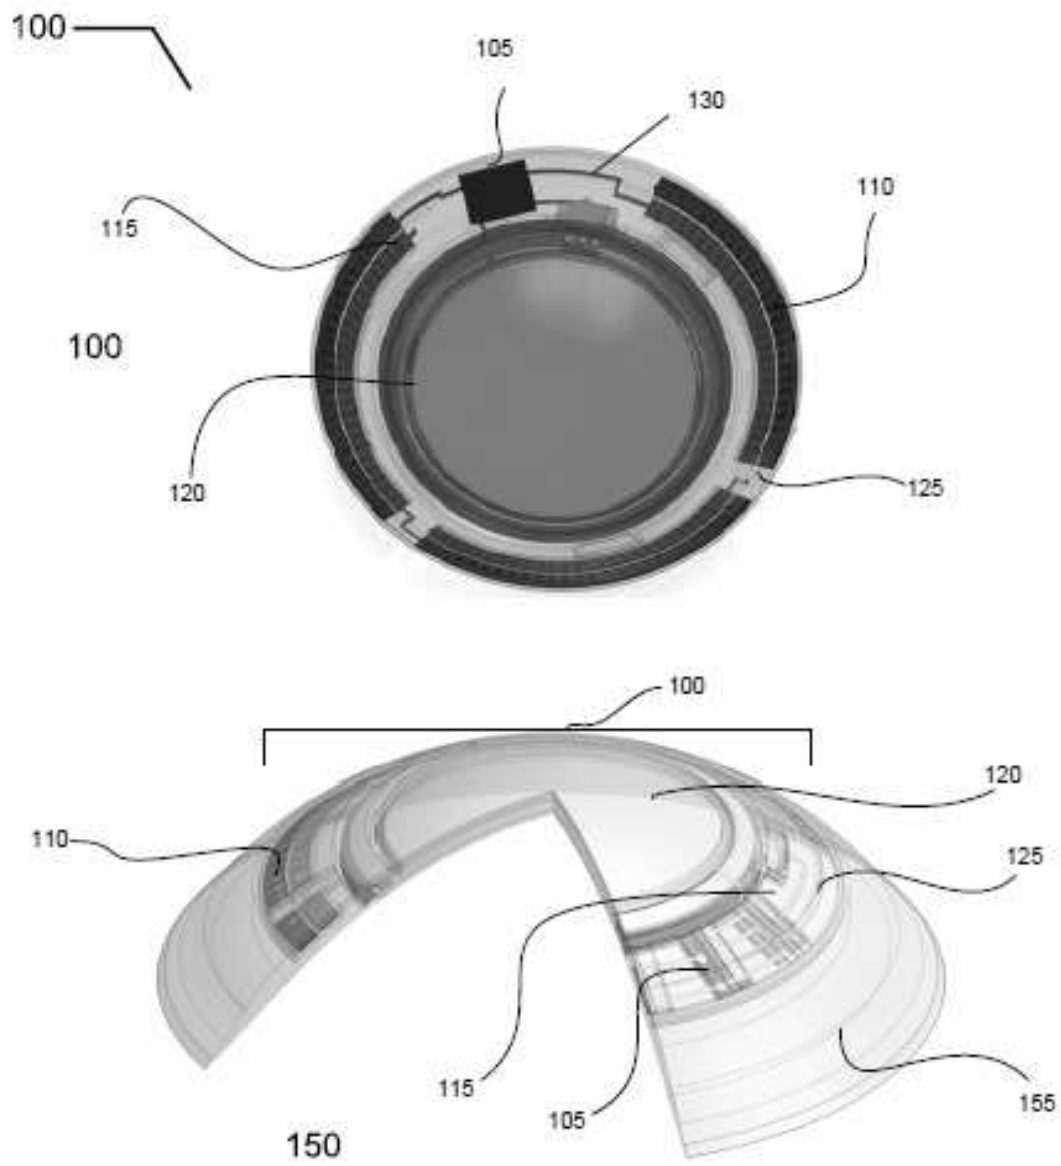


Figure 1

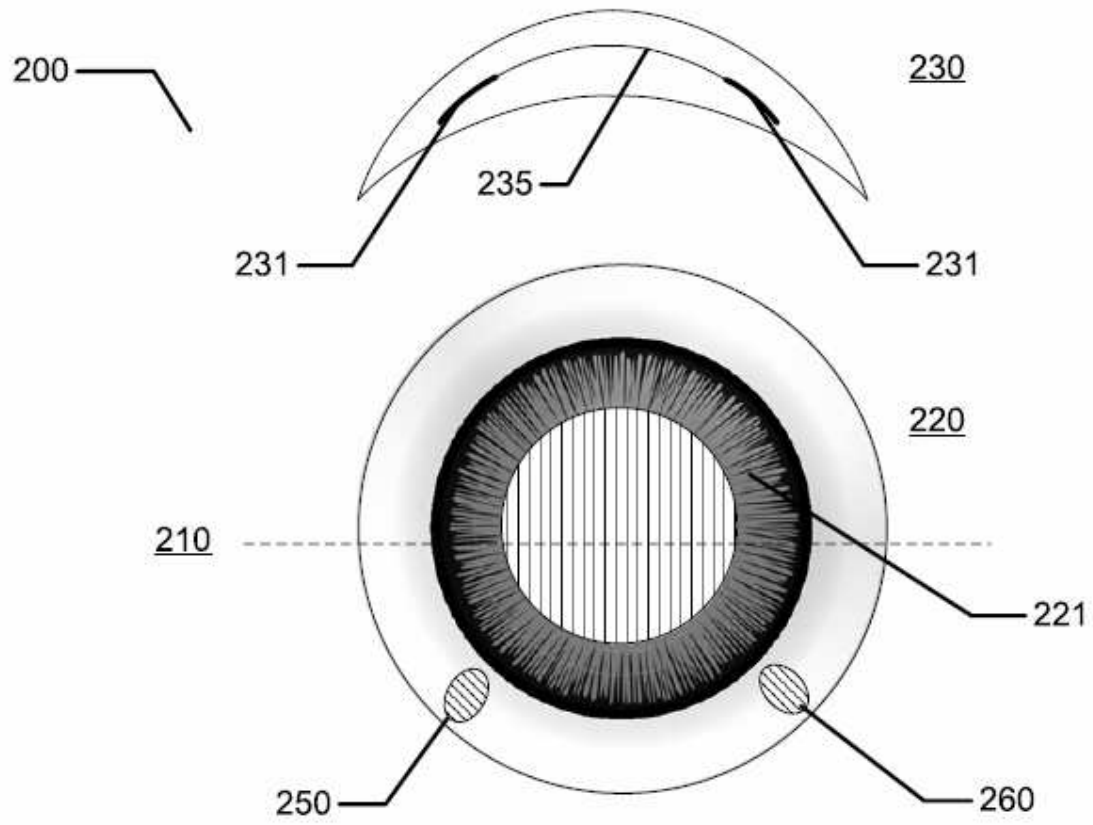


FIG. 2

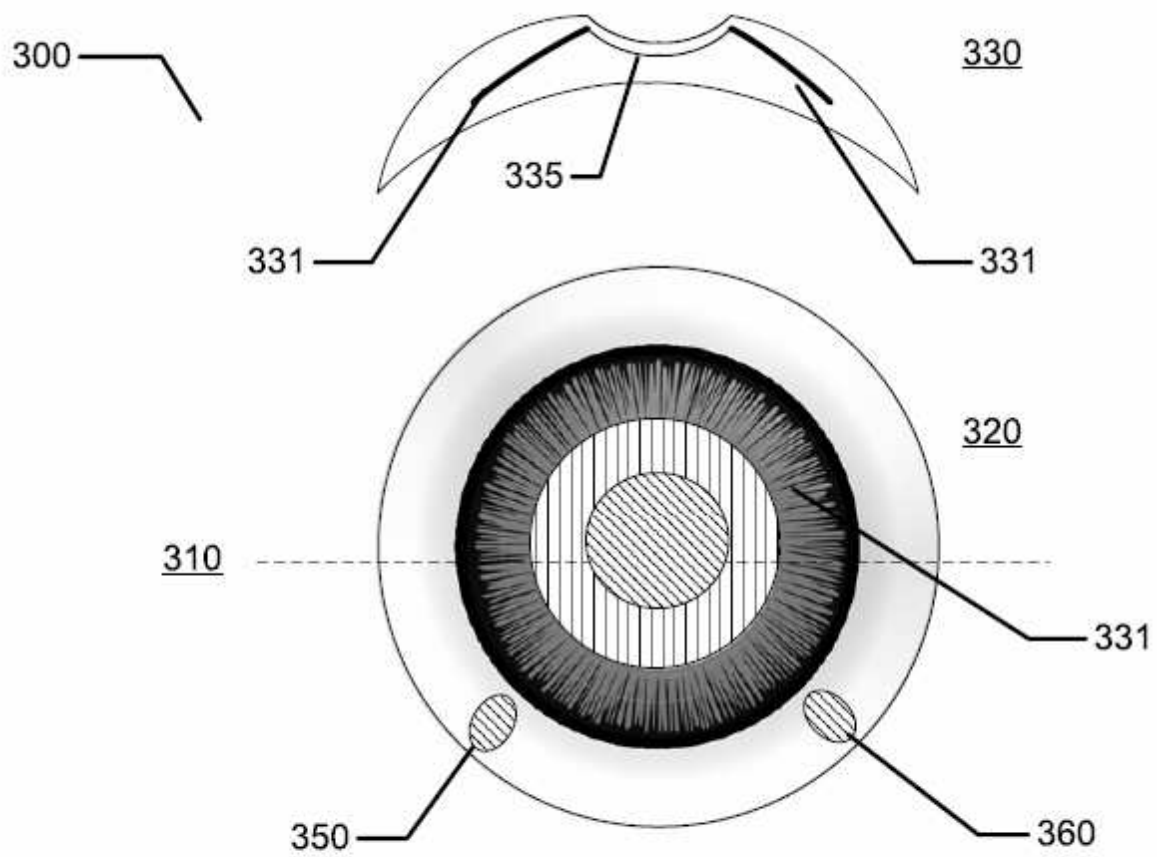


FIG. 3

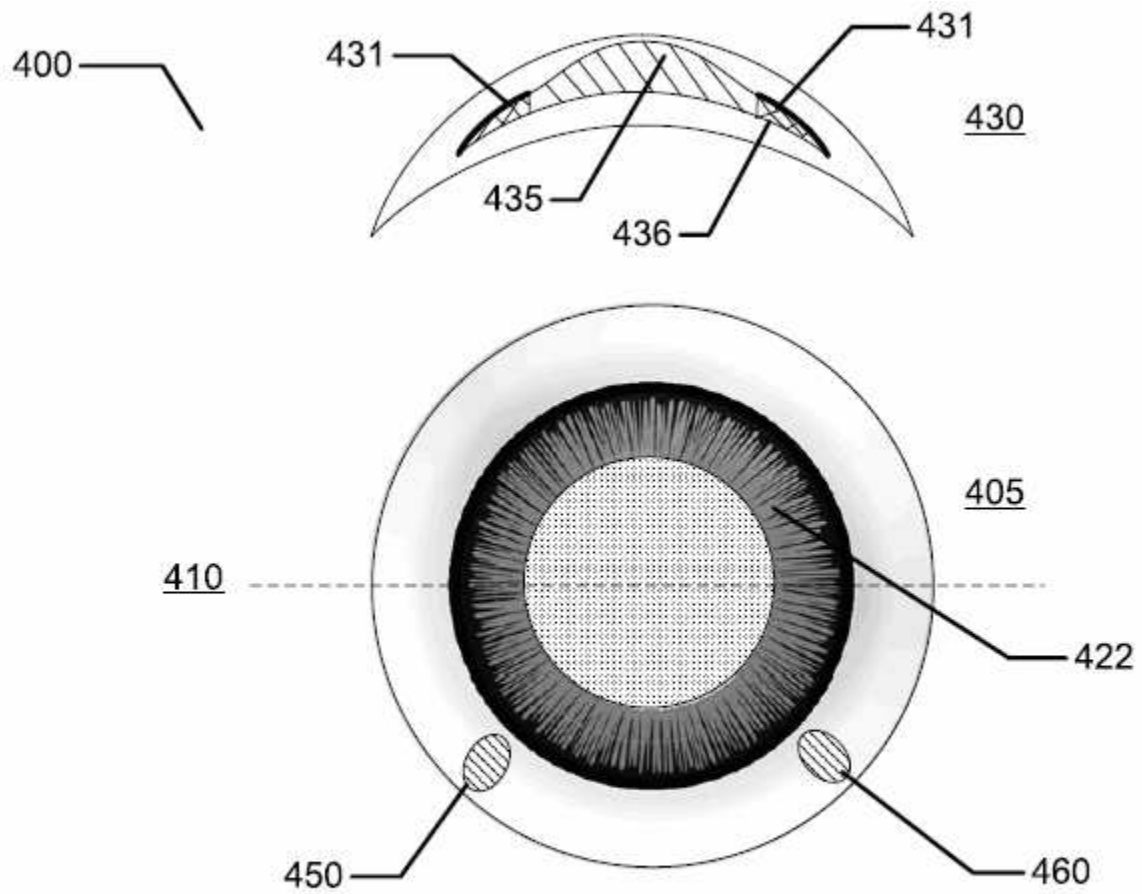


FIG. 4

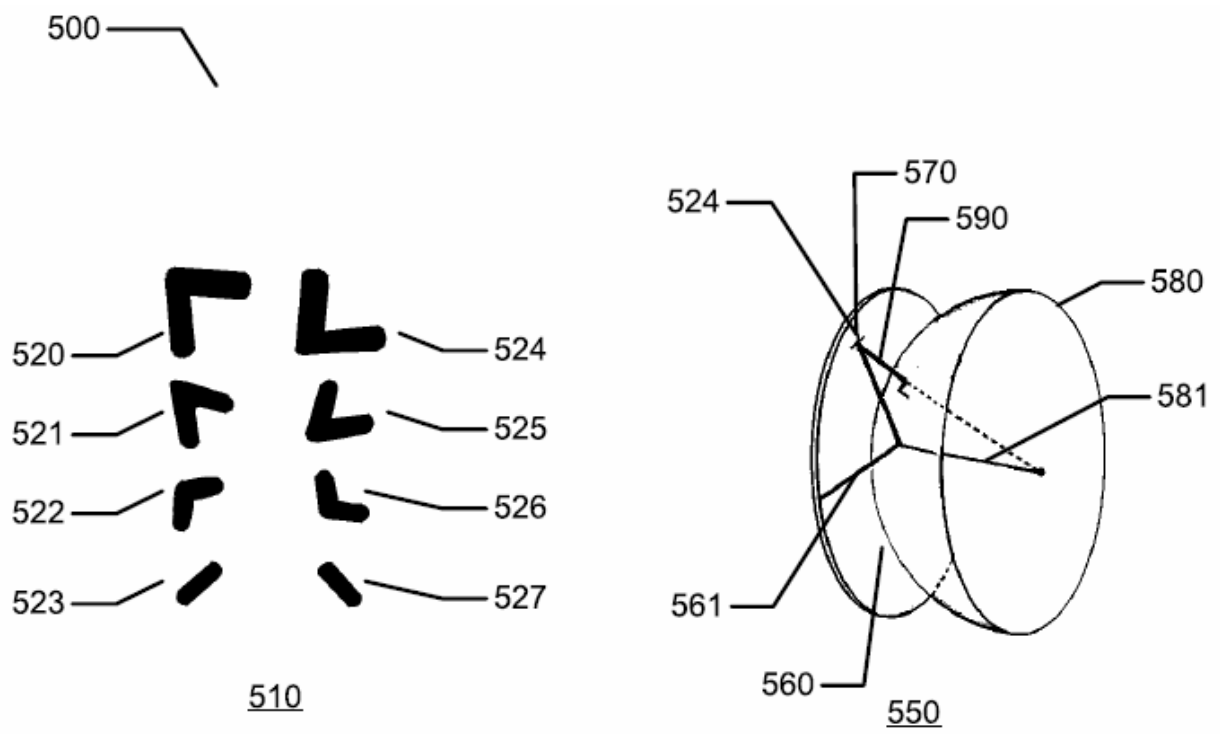


FIG. 5 (Prior art)

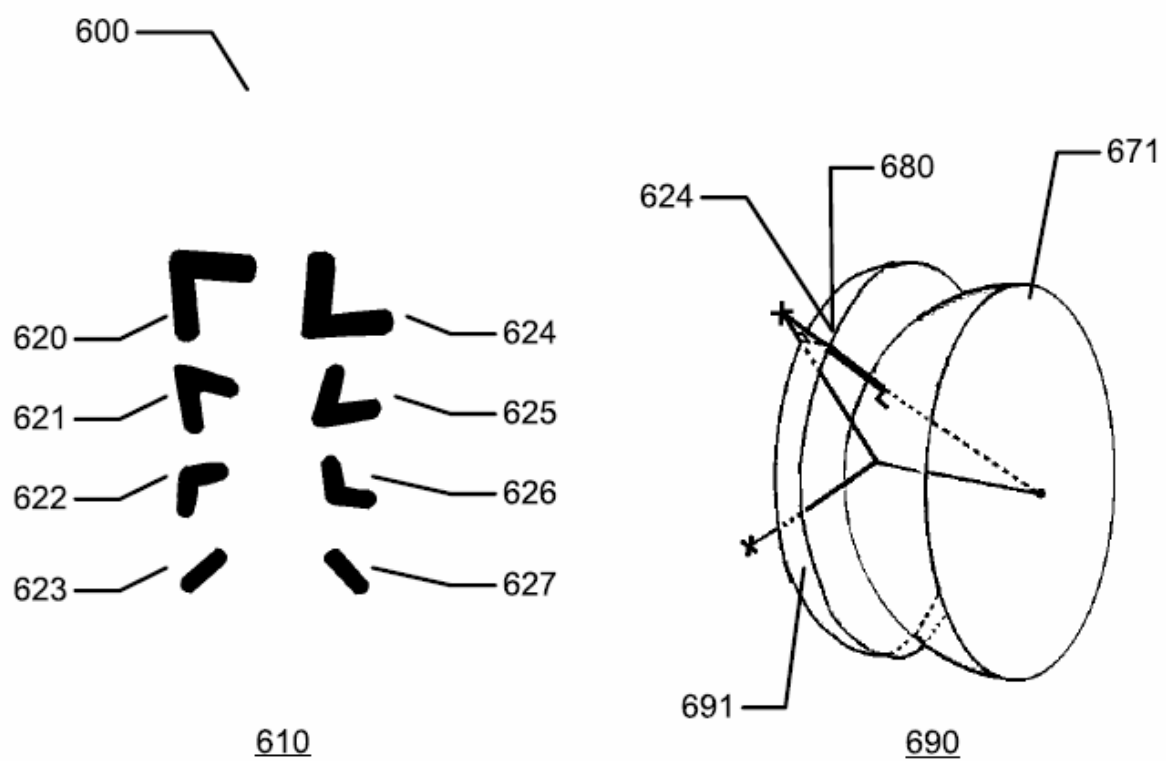


FIG. 6

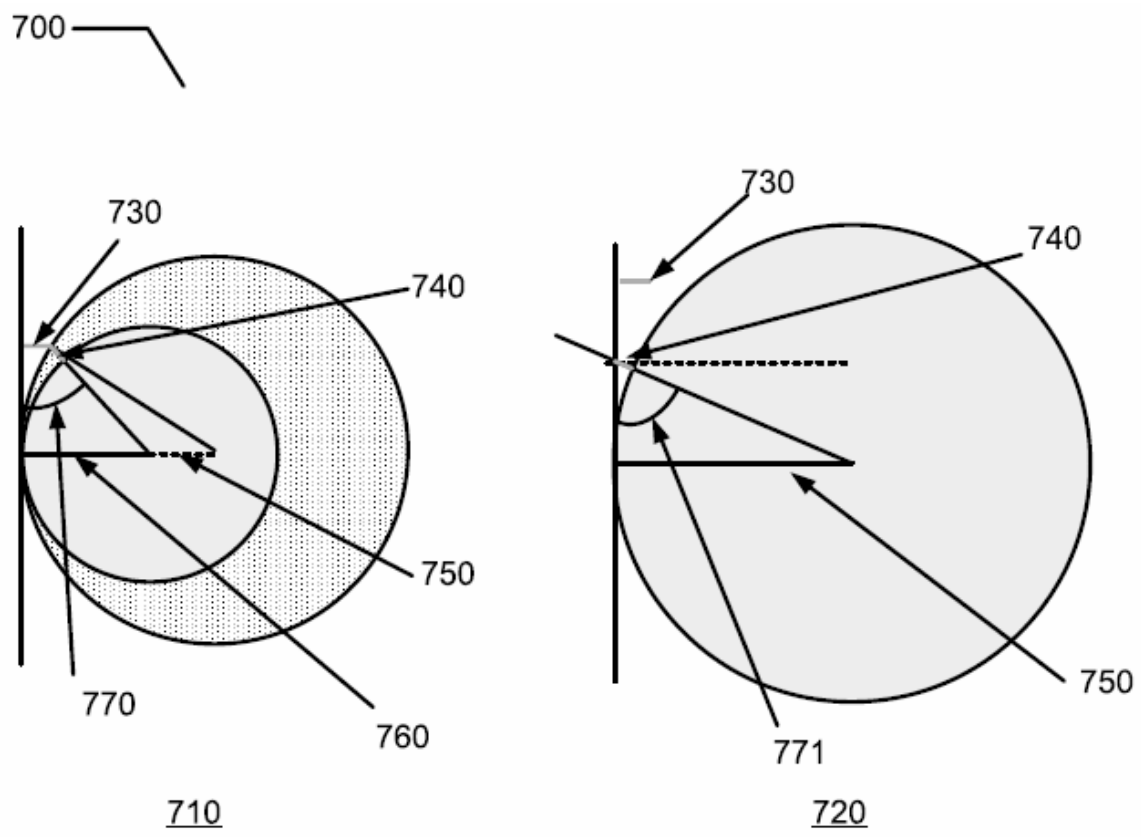


FIG. 7

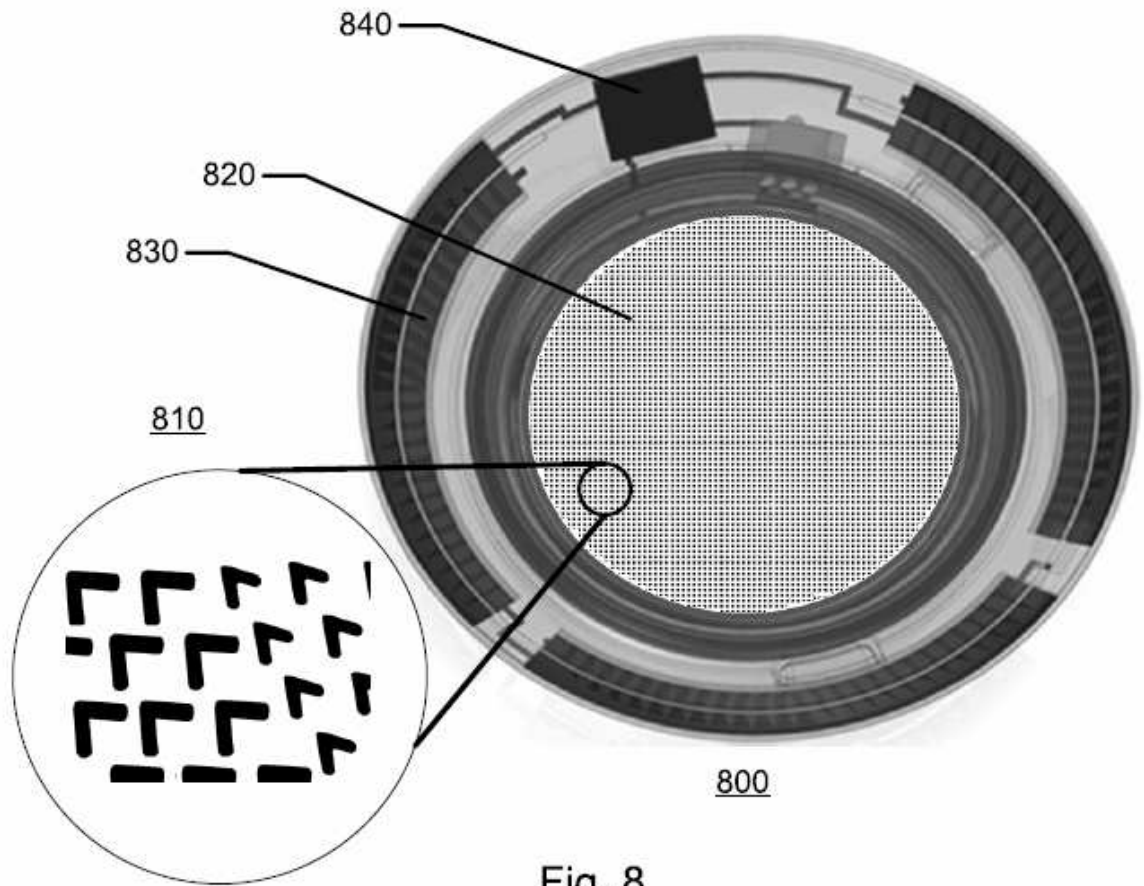


Fig. 8

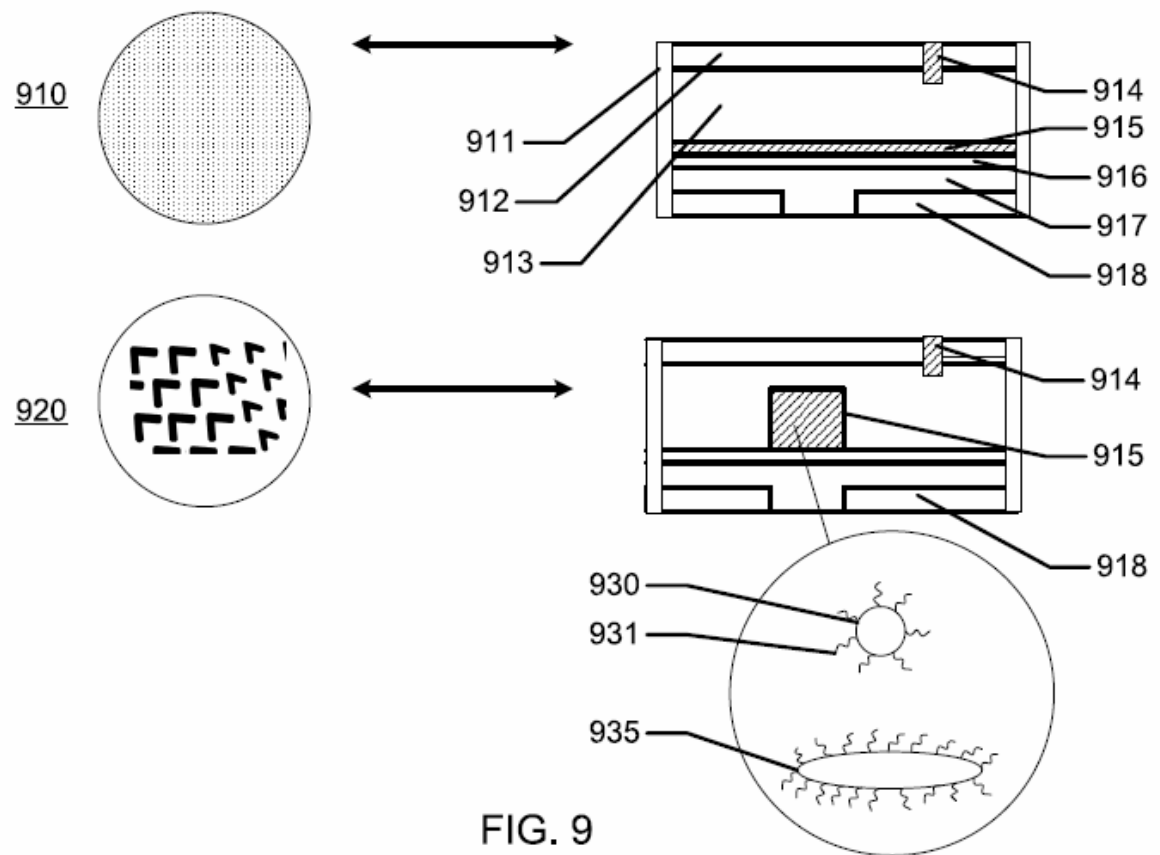


FIG. 9

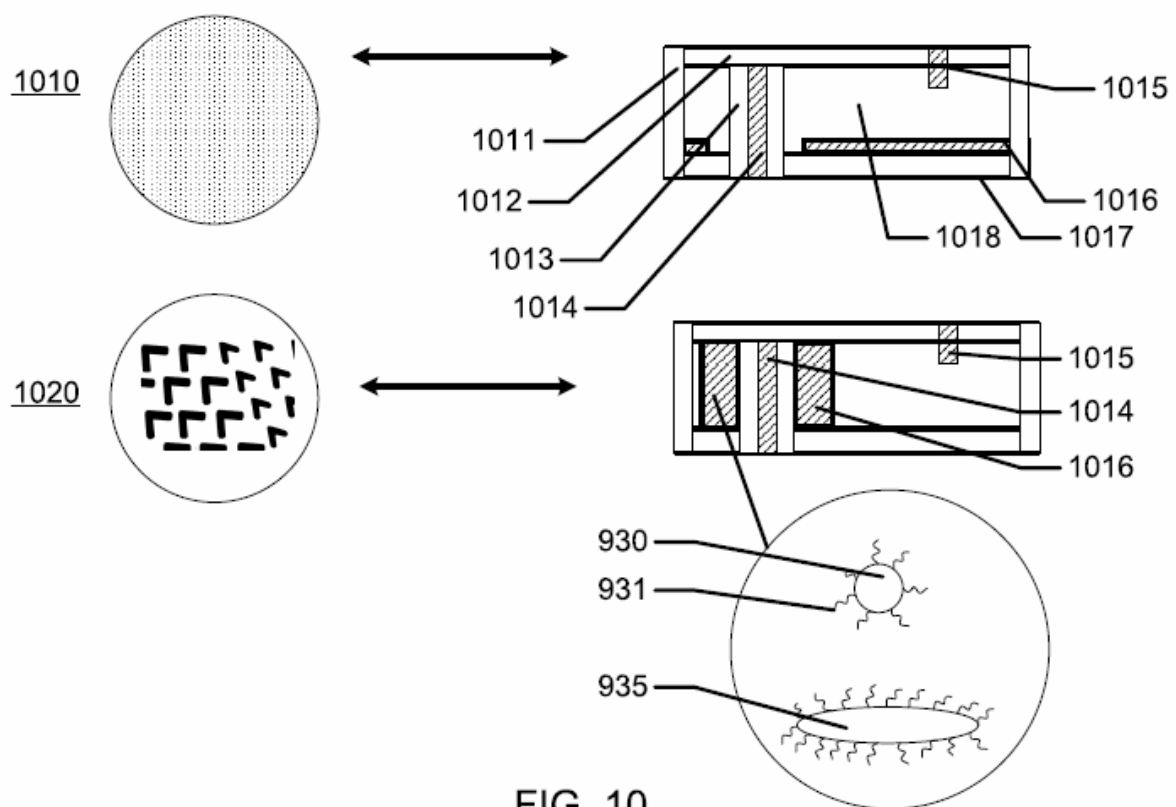


FIG. 10

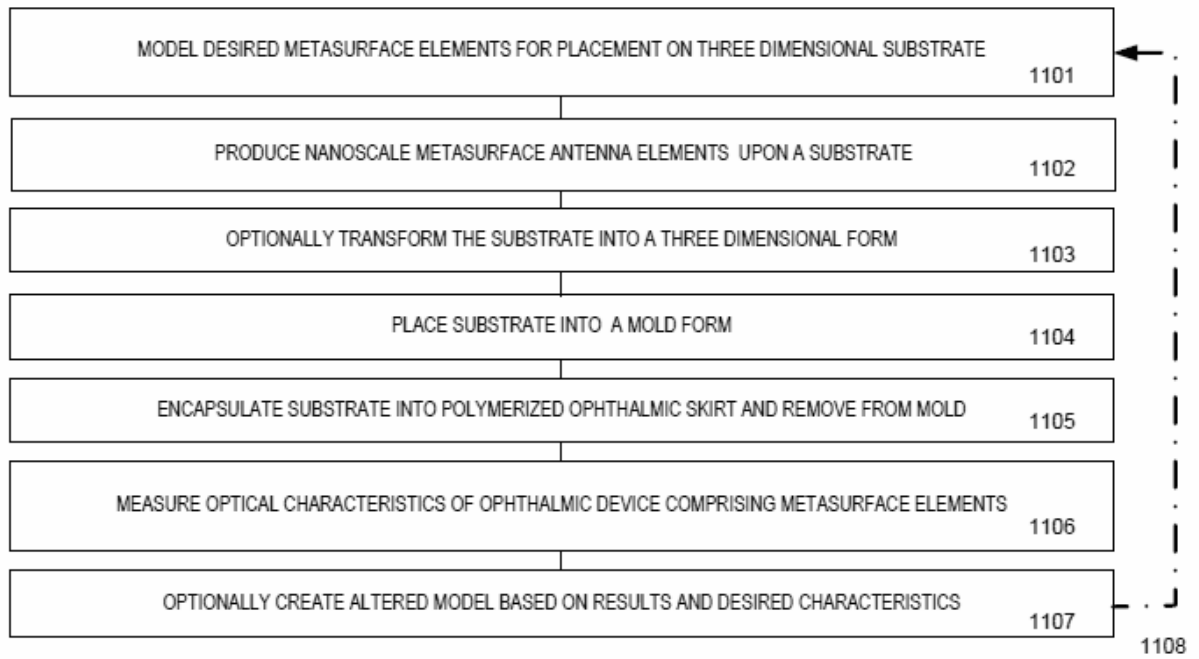
1100

FIG. 11

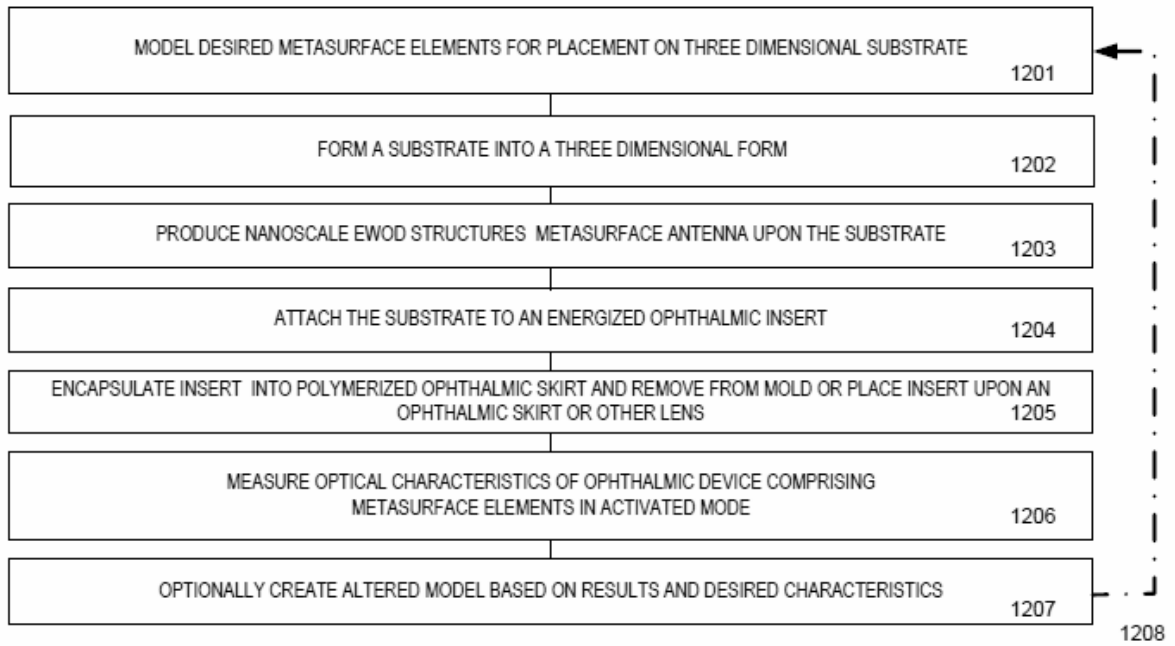
1200

FIG. 12

1300

OPTAIN AN OPHTHALMIC DEVICE COMPRISING DYNAMIC METASURFACE ELEMENTS	1301
POSITION OPHTHALMIC DEVICE BETWEEN EYE SURFACE AND EYELID	1302
PROVIDE AN ACTIVATION SIGNAL TO OPHTHALMIC DEVICE	1303
OBSERVE AN ALTERED OPHTHALMIC STATE THROUGH LENS	1304
PROVIDE A SECOND ACTIVATION SIGNAL TO OPHTHALMIC DEVICE	1305
REMOVE OPHTHALMIC DEVICE FROM EYE	1306

FIG. 13