



(51) International Patent Classification:

B01D 63/04 (2006.01) *B01D 65/00* (2006.01)
B01D 29/52 (2006.01) *B01D 65/02* (2006.01)
B01D 63/06 (2006.01) *B01D 65/08* (2006.01)

(21) International Application Number:

PCT/EP2013/060647

(22) International Filing Date:

23 May 2013 (23.05.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1209327.4 23 May 2012 (23.05.2012) GB

(71) Applicant: VEOLIA WATER SOLUTIONS & TECHNOLOGIES SUPPORT [FR/FR]; 1 place Montgolfier, F-94410 Saint-Maurice (FR).

(72) Inventor: LANGE, Neville Ernest; 109 Seymour Road, Gloucestershire GL1 5PT (GB).


(74) Agent: DOCHERTY, Andrew; Marks & Clerk LLP, Aurora, 120 Bothwell Street, Glasgow G2 7JS (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) Title: FILTRATION APPARATUS

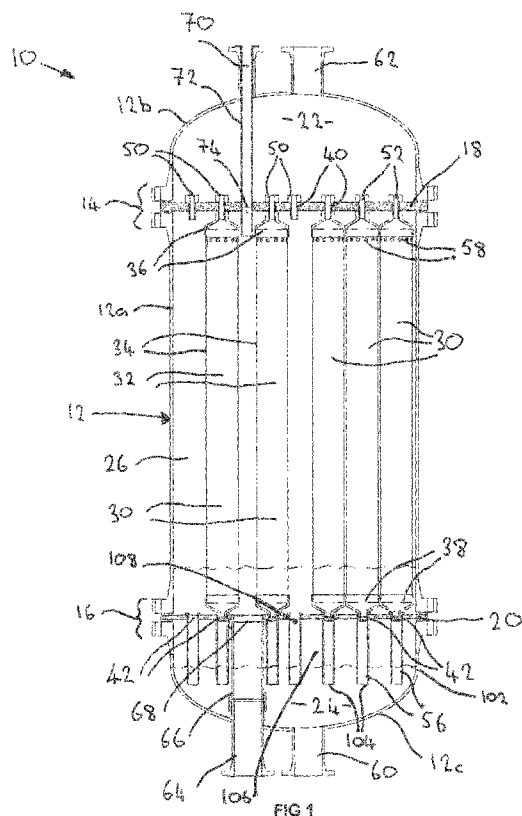

(57) Abstract: A filtration apparatus (10) for treating a fluid comprises a vessel (12), a first partition plate (18) dividing the vessel into first and second chambers (22, 26) and defining a through hole (40), and a filtration module (30) located within the second chamber (26) and including a body section (32) defining an outer diameter which is greater than the diameter of the through hole (40) in the first partition plate (18). The apparatus (10) further comprises a reducing connector (36) having a first end secured to the body section (32) of the filtration module (30) and a second end sealed relative to the through hole (40) in the first partition plate (18) to permit communication between the filtration module (30) and the first chamber (22). In a disclosed embodiment the apparatus (10) includes a second partition plate (20) such that the vessel is divided into first, second and third chambers (22, 24, 26), wherein the filtration module (30) is mounted between the partition plates (18, 20).



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, —
ML, MR, NE, SN, TD, TG).

*before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*