



(43) International Publication Date
25 September 2014 (25.09.2014)

- (51) International Patent Classification:
B66C 1/12 (2006.01)
- (21) International Application Number:
PCT/US2014/027232
- (22) International Filing Date:
14 March 2014 (14.03.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/789,830 15 March 2013 (15.03.2013) US
- (71) Applicant: **YALE CORDAGE INC.** [US/US]; 77 Industrial Park Road, Saco, Maine 04072 (US).
- (72) Inventors: **YALE, Thomas L.**; 270 Western Avenue, PO Box 317, West Boothbay Harbor, Maine 04575 (US).
HILDEBRAND, Richard W.; 63 Black Point Road, New Gloucester, Maine 04260 (US).
- (74) Agents: **CERNOTA, Andrew P.** et al.; Maine Cernota & Rardin, 547 Amherst St., 3rd Floor, Nashua, New Hampshire 03063 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

[Continued on next page]

(54) Title: MULTI PART SYNTHETIC EYE AND EYE SLING

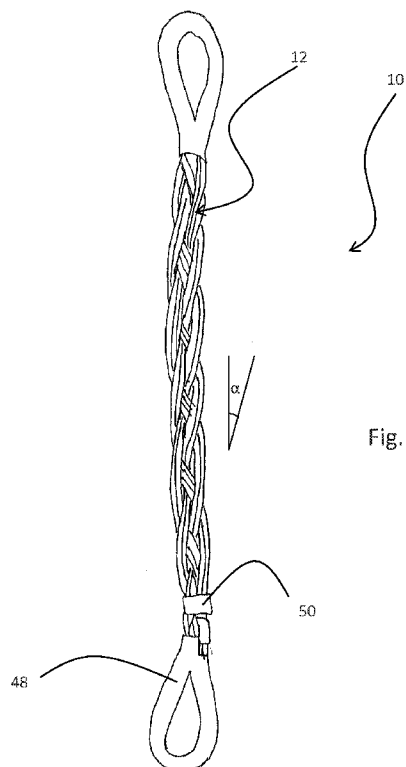


Fig. 1

(57) Abstract: A system for applying a tensile load, the system having: a length of continuous synthetic rope having first and second bitter ends; the continuous synthetic rope being woven with itself to create a sling; the first and second bitter ends of the rope being capable of moving relative to each other and the sling. The system may be configured such that movement of the bitter ends relative to the sling or each other is observable or measurable. Systems may be slings that provide a plurality of wraps of a continuous synthetic rope having loops at opposing ends; the plurality of wraps of continuous synthetic rope having at least three parts and being woven such that the resulting woven sling has at least three picks.



EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of
the earlier application (Rule 4.17(iii))