



- (51) International Patent Classification: Not classified
- (21) International Application Number:
PCT/US2014/012080
- (22) International Filing Date:
17 January 2014 (17.01.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/754,298 18 January 2013 (18.01.2013) US
61/871,061 28 August 2013 (28.08.2013) US
- (71) Applicant: YALE UNIVERSITY [US/US]; Two Whitney Avenue, New Haven, Connecticut 06511 (US).
- (72) Inventor: SCHOELKOPF, Robert, John; 44 Northwood Road, Madison, CT 06443 (US).
- (74) Agent: ACHILLES, Daryl, L.; Wolf, Greenfield & Sacks, P.C., 600 Atlantic Avenue, Boston, MA 02210-2206 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,


BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: METHODS FOR MAKING A SUPERCONDUCTING DEVICE WITH AT LEAST ONE ENCLOSURE

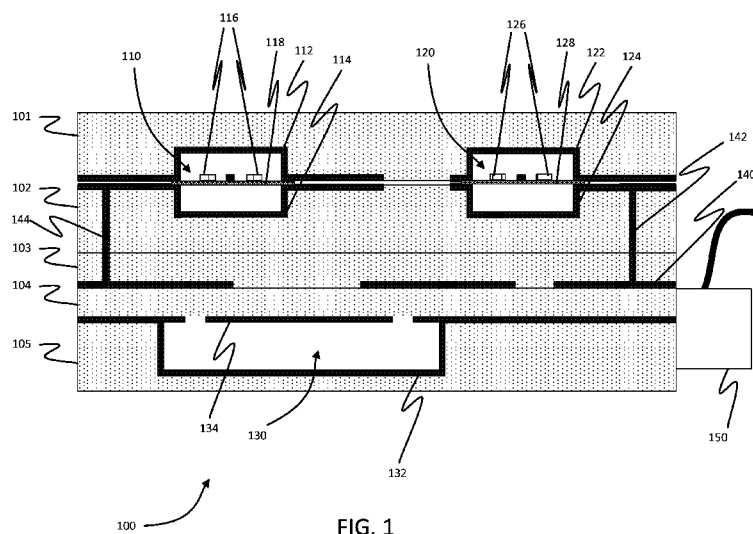

(57) Abstract: Some embodiments are directed to a device including multiple substrates comprising one or more troughs. The substrates are disposed such that the one or more troughs form at least one enclosure. At least one superconducting layer covers at least a portion of the at least one enclosure. Other embodiments are directed to a method for manufacturing a superconducting device. The method includes acts of forming at least one trough in at least a first substrate; covering at least a portion of the first substrate with a superconducting material; covering at least a portion of a second substrate with the superconducting material; and bonding the first substrate and the second substrate to form at least one enclosure comprising the at least one trough and the superconducting material.