



- (51) **International Patent Classification:**
E02B 15/04 (2006.01) *B01D 29/00* (2006.01)
E03F 5/14 (2006.01)
- (21) **International Application Number:**
PCT/AU2015/000043
- (22) **International Filing Date:**
28 January 2015 (28.01.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
2014200454 28 January 2014 (28.01.2014) AU
- (72) **Inventor; and**
- (71) **Applicant : ROTHLEITNER, Craig** [AU/AU]; Level 3,
267 St Georges Terrace, Perth, Western Australia 6000
(AU).
- (74) **Agent: WRAYS PTY LTD;** Ground Floor, 56 Ord Street,
West Perth, Western Australia 6005 (AU).
- (81) **Designated States** (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** DRAINAGE TREATMENT SYSTEM

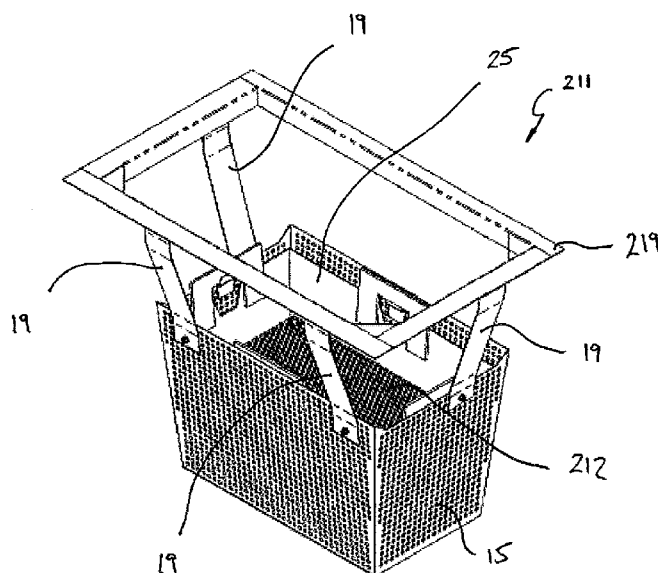


Fig 14

(57) **Abstract:** The present invention provides a drain-
age treatment system (11) for minimising debris entering
a drainage system. The drainage treatment system com-
prises a support housing (13) which is supportingly re-
ceived in the drainage system downstream of an opening
of the drainage system. The support housing comprises a
first drainage means (21) for allowing liquid to flow
therethrough. The drainage treatment system also com-
prises a first insert (25) for collecting debris. The first
insert comprising a second drainage means (27) for al-
lowing liquid to flow therethrough whilst preventing the
flow through of debris. The first insert is removably
supported within the housing such that when in place the
first drainage means and second drainage means align,
allowing liquid to pass through the drainage treatment
system. In use, debris collects in the drainage treatment
system and is removed therefrom by removing the first
insert from the support housing.