

TITLE OF THE INVENTIONAQUEOUS, SILICONE-MODIFIED ACRYLATE POLYMER EMULSIONBACKGROUND OF THE INVENTIONTechnical Field

5 The present invention relates to an aqueous, silicone-modified acrylate polymer emulsion which is capable of forming a coating having excellent water repellency, water resistance, weatherability, dispersion characteristics of pigment, gloss retentivity, stain resistance and adhesion properties. More particularly, the present invention is concerned with an aqueous, silicone-modified acrylate polymer emulsion, which is an acrylate polymer emulsion produced by subjecting a monomer system (A) comprising an acrylate monomer selected from the group consisting of an acrylic ester, a methacrylic ester and a mixture thereof to emulsion polymerization in an aqueous medium in the presence of an emulsifier (B) selected from the group consisting of a sulfonic acid group- or sulfonate group-containing ethylenically unsaturated monomer, a sulfate ester group-containing ethylenically unsaturated monomer and a mixture thereof, wherein the acrylate polymer emulsion is silicone-modified using a specific, silicone structure-containing modifier (C) during or after the emulsion polymerization. The aqueous, sili-

10

15

20

25

cone-modified acrylate polymer emulsion of the present invention can be advantageously used as a paint, an undercoating or finish coating material for building materials, an adhesive, a pressure-sensitive adhesive, a processing agent for papers, or a finish coating material for textile fabrics, especially as a paint, or a finish coating material for building materials.

Prior Art

When an aqueous acrylate polymer emulsion obtained by emulsion polymerization is dried at room temperature or under heated conditions, a coating is obtained which has a relatively good durability. Therefore, the aqueous acrylate polymer emulsion has been widely used as a resin for an aqueous paint. However, when a coating, which is obtained from an acrylate polymer emulsion or from a paint comprising an acrylate polymer emulsion having a pigment incorporated therein, is exposed to outdoor conditions or ultraviolet light, not only is the luster of the coating likely to be rapidly deteriorated but also the gloss retentivity of the coating is poor.

For solving the problems as mentioned above, it was conventionally proposed to add a silicone to an aqueous acrylate polymer emulsion to increase the resistance of a coating formed from the emulsion to

ultraviolet light, oxygen, water and various types of solvents, and improve the durability of the coating. With respect to prior art documents which disclose such a technique, reference can be made to Canadian Patent
5 No. 842947, U.S. Patent No. 3,706,697, Unexamined Japanese Patent Application Laid-Open Specification No. 3-255273 and Unexamined Japanese Patent Application Laid-Open Specification No. 6-122734. However, the emulsions disclosed in these documents have poor water
10 resistance. The reason for this resides in that an emulsifier employed in the technique of each of the above documents does not have a reactivity with the emulsified particles of the aqueous acrylate polymer emulsion but is only adsorbed on the emulsified parti-
15 cles, so that it is likely that water intrudes into the emulsified particles. In European Patent No. 0 401 496, a sulfonic acid group-containing ethylenically unsaturated monomer is employed. However, in European Patent No. 0 401 496, styrene is used in a large amount
20 which is almost the same as the amount of acrylic ester employed and, therefore, the obtained emulsion is disadvantageous in that a coating formed from the emulsion is discolored upon exposure to ultraviolet light and has poor weatherability. In U.S. Patent No.
25 5,214,095, an ethylenically unsaturated monomer and a

hydrolyzable silane are simultaneously introduced into an emulsion polymerization system in the presence of an aqueous solvent, so that the obtained aqueous emulsion has poor dispersion stability. Even if a dispersant or emulsifier, as a stabilizing agent, is added to this aqueous emulsion, when a coating formation promotor or an inorganic pigment is added to the aqueous emulsion, coagulation of the aqueous emulsion is likely to occur. In this case, even when a coating formation promotor or an inorganic pigment can be mixed with the aqueous emulsion without suffering from the occurrence of coagulation, a coating obtained from the emulsion has poor gloss. Further, a large amount of stabilizing agent must be used and, therefore, the coating obtained from the emulsion has poor water resistance.

As mentioned above, the conventional aqueous acrylate polymer emulsions have problems such that these emulsions have poor water resistance or poor weatherability, and coatings obtained from such emulsions having a pigment incorporated therein are unsatisfactory in respect of luster even just after the coating operation. Further, when the coating is exposed to outdoor conditions, especially ultraviolet light, for a prolonged period of time, the luster of the coating is drastically deteriorated. Further,

there has recently been an increasing demand in the art for further improvement of various properties of aqueous acrylate polymer emulsions.

SUMMARY OF THE INVENTION

5 In these situations, the present inventors have made extensive and intensive studies with a view toward solving the above-mentioned problems accompanying the conventional aqueous acrylate polymer emulsions. As a result, it has unexpectedly been found that an aqueous,
10 silicone-modified acrylate polymer emulsion as mentioned below is capable of providing a coating which not only has excellent water resistance, but also can retain luster for a prolonged period of time. The above-mentioned aqueous, silicone-modified acrylate
15 polymer emulsion consists in an acrylate polymer emulsion produced by subjecting a monomer system (A) comprising an acrylate monomer selected from the group consisting of an acrylic ester, a methacrylic ester and a mixture thereof to emulsion polymerization in an
20 aqueous medium in the presence of an emulsifier (B) selected from the group consisting of a sulfonic acid group- or sulfonate group-containing ethylenically unsaturated monomer, a sulfate ester group-containing ethylenically unsaturated monomer and a mixture thereof,
25 wherein the acrylate polymer emulsion is

silicone-modified using a specific, silicone structure-containing modifier (C) during or after the emulsion polymerization.

Accordingly, it is an object of the present invention to provide a novel aqueous, silicone-modified acrylate polymer emulsion which is capable of providing a coating having excellent water repellency, water resistance, weatherability, dispersion characteristics of pigment, gloss retentivity, stain resistance and adhesion properties.

The foregoing and other objects, features and advantages will be apparent to those skilled in the art from the following detailed description and claims.

DETAILED DESCRIPTION OF THE INVENTION

According to the present invention, there is provided an aqueous, silicone-modified acrylate polymer emulsion, which is an acrylate polymer emulsion produced by subjecting a monomer system (A) to emulsion polymerization in an aqueous medium in the presence of an emulsifier (B), wherein the acrylate polymer emulsion is silicone-modified using a silicone structure-containing modifier (C) during or after the emulsion polymerization;


wherein the monomer system (A) comprises an acrylate monomer selected from the group consisting of an

- 7 -

acrylic ester, a methacrylic ester and a mixture thereof;

wherein the emulsifier (B) is selected from the group consisting of a sulfonic acid group- or sulfonate group-containing ethylenically unsaturated monomer, a sulfate ester group-containing ethylenically unsaturated monomer and a mixture thereof; and

wherein the silicone structure-containing modifier (C) comprises a silicone structure-containing silane (I) represented by the formula:



wherein R^1 represents a hydrogen atom, a C_1 - C_{16} aliphatic hydrocarbon group, a C_5 - C_{10} aryl group, a C_5 - C_6 cycloalkyl group, a vinyl group, an acrylic C_1 - C_{10} alkyl group or a methacrylic C_1 - C_{10} alkyl group, and each R^2 independently represents a C_1 - C_8 alkoxyl group, an acetoxyl group or a hydroxyl group.

In the aqueous, silicone-modified acrylate polymer emulsion of the present invention, it is preferred that the monomer system (A) and the emulsifier (B) be, respectively, used in an amount of from 80 to 99.95 %

This Sheet Has Been Replaced



by weight, more preferably 90 to 99.9 % by weight, and in an amount of from 20 to 0.05 % by weight, more preferably from 10 to 0.1 % by weight, based on the total weight of the monomer system (A) and the emulsifier (B), and that the silicone structure-containing modifier (C) be used in an amount which satisfies the following relationships:

$$\frac{1}{2} \leq \frac{(A) + (B)}{(C)} \leq \frac{99}{1}$$

wherein (A), (B) and (C), respectively, represent amounts of the monomer system (A), the emulsifier (B) and the modifier (C) in terms of weight percentages based on the total weight of materials (A), (B) and (C).

Further, in the aqueous, silicone-modified acrylate polymer emulsion of the present invention, the ratio of the total weight of the monomer system (A), the emulsifier (B) and the modifier (C) to the weight of the aqueous medium is preferably 75/25 or less, more preferably from 30/70 to 70/30.

In the present invention, the monomer system (A) comprises an acrylate monomer selected from the group consisting of an acrylic ester, a methacrylic ester and a mixture thereof.

In the present invention, the monomer system (A)

may further comprise a comonomer copolymerizable with the acrylate monomer, and which comonomer is at least one member selected from the group consisting of an acrylamide monomer, a methacrylamide monomer, a vinyl monomer and a carboxylic acid group-containing ethylenically unsaturated monomer. In the monomer system (A), it is preferred that the acrylate monomer and the comonomer be, respectively, present in an amount of from 90 % to less than 100 % by weight and in an amount of from 10 % by weight or less, based on the total weight of the acrylate monomer and the comonomer.

Examples of (meth)acrylic esters which can be used in the present invention as the acrylate monomer of the monomer system (A) include a C_1 - C_{18} alkyl ester of (meth)acrylic acid, a C_1 - C_{18} hydroxyalkyl ester of (meth)acrylic acid, a (poly)oxyethylene mono(meth)acrylate having 1 to 100 ethylene oxide groups, a (poly)oxypropylene mono(meth)acrylate having 1 to 100 propylene oxide groups and a (poly)oxyethylene di(meth)acrylate having 1 to 100 ethylene oxide groups.

Specific examples of C_1 - C_{18} alkyl esters of (meth)acrylic acid include methyl (meth)acrylate, ethyl (meth)acrylate, n-butyl (meth)acrylate, isobutyl (meth)acrylate, 2-ethylhexyl (meth)acrylate and dodecyl (meth)acrylate. Specific examples of C_1 - C_{18} hydroxyal-

kyl esters of (meth)acrylic acid include 2-hydroxyethyl (meth)acrylate and 2-hydroxypropyl (meth)acrylate. Specific examples of (poly)oxyethylene mono(meth)acrylates include ethylene glycol (meth)acrylate, ethylene glycol methoxy(meth)acrylate, diethylene glycol (meth)acrylate, diethylene glycol methoxy(meth)acrylate, tetraethylene glycol (meth)acrylate and tetraethylene glycol methoxy(meth)acrylate. Specific examples of (poly)oxypropylene mono(meth)acrylates include propylene glycol (meth)acrylate, propylene glycol methoxy(meth)acrylate, dipropylene glycol (meth)acrylate, dipropylene glycol methoxy(meth)acrylate, tetrapropylene glycol (meth)acrylate and tetrapropylene glycol methoxy(meth)acrylate. Specific examples of (poly)oxyethylene di(meth)acrylates include ethylene glycol di(meth)acrylate, diethylene glycol di(meth)acrylate, triethylene glycol di(meth)acrylate and tetraethylene glycol di(meth)acrylate. Specific examples of (meth)acrylic esters other than mentioned above include glycidyl (meth)acrylate and trimethylolpropane tri(meth)acrylate.

In the aqueous, silicone-modified acrylate polymer emulsion of the present invention, it is more preferred that the comonomer as an optional component of the monomer system (A) be a carboxylic acid group-contain-

ing ethylenically unsaturated monomer. Further, it is especially preferred that the carboxylic acid group-containing ethylenically unsaturated monomer be at least one member selected from the group consisting of acrylic acid, methacrylic acid, itaconic acid and a half ester thereof, fumaric acid and a half ester thereof, and maleic acid and a half ester thereof. These carboxylic acid group-containing ethylenically unsaturated monomers are preferred because these monomers also function as a catalyst which facilitates the hydrolyzation reaction and condensation reaction of hydrolyzable silanes.

As mentioned above, in the present invention, as examples of comonomers which are copolymerizable with the acrylate monomer, in addition to the above-mentioned carboxylic acid group-containing ethylenically unsaturated monomers, there can be mentioned an acrylamide monomer, a methacrylamide monomer, a vinyl monomer and the like. Specific examples of acrylamide monomers and methacrylamide monomers include (meth)acrylamide, diacetone (meth)acrylamide, N-methylol (meth)acrylamide and N-butoxymethyl (meth)acrylamide. Specific examples of vinyl monomers include vinyl acetate, vinyl propionate, vinyl ester of versatic acid (manufactured sold by Shell Chemical Co., U.S.A. under the trade name of Veo


Va), vinyl pyrrolidone, methyl vinyl ketone and a vinyl cyanide, such as acrylonitrile and methacrylonitrile.

Examples of comonomers other than mentioned above, which can be used in the present invention, include
5 aromatic monomers, such as vinyl toluene, styrene and α -methylstyrene; halogenated vinyls, such as vinyl chloride and vinylidene chloride; butadiene; and ethylene.

In the present invention, it is preferred that the
10 acrylate monomer of the monomer system (A) contain 5 % or more, based on the weight of the monomer system (A), of a C₅-C₁₂ cycloalkyl ester of acrylic acid, a C₅-C₁₂ cycloalkyl ester of methacrylic acid or a mixture thereof, in which the cycloalkyl moiety of the cycloalkyl ester is unsubstituted or substituted with a C₁-C₆
15 alkyl group, a hydroxyl group or an epoxy group. In the present invention, when the monomer system (A) contains 5 % or more based on the weight of the monomer system (A), of a C₅-C₁₂ cycloalkyl ester of acrylic acid, a C₅-C₁₂ cycloalkyl ester of methacrylic acid or
20 a mixture thereof, the aqueous, silicone-modified acrylate polymer emulsion of the present invention can form a coating which is excellent especially with respect to weatherability.

25 Examples of the above-mentioned C₅-C₁₂ cycloalkyl

esters of acrylic acid or methacrylic acid include compounds represented by formula (1):

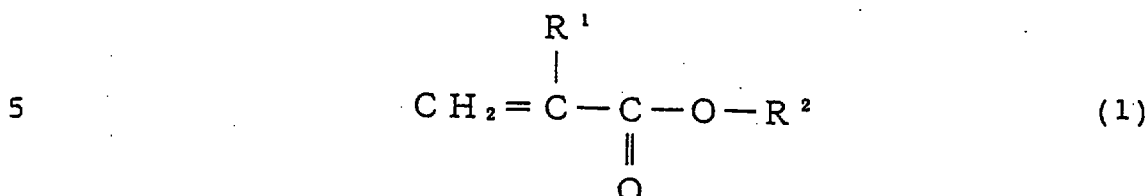

10 wherein R^1 represents a hydrogen atom or a methyl group; and R^2 represents a cyclopentyl group, a cyclohexyl group or a cyclo-
dodecyl group, which is unsubstituted or substituted with a C_1 - C_6 alkyl group, a hydroxyl group or an epoxy group.





15 Specific examples of compounds represented by formula (1) above include cyclohexyl (meth)acrylate, 2-hydroxycyclohexyl (meth)acrylate, methylcyclohexyl (meth)acrylate and 2,3-epoxycyclohexane (meth)acrylate.

20 In the present invention, it is preferred that the sulfonic acid group- or sulfonate group-containing ethylenically unsaturated monomer of the emulsifier (B) be selected from radically polymerizable double bond-containing compounds having a sulfonic acid group, or an ammonium or an alkali metal salt thereof (i.e., ammonium sulfonate group or alkali metal sulfonate
25 group). Among these compounds, more preferred are

radically polymerizable double bond-containing compounds having a substituent selected from the group consisting of a C₁-C₂₀ alkyl group, a C₂-C₄ alkyl ether group, a poly-C₂-C₄ alkyl ether group, a C₆ or C₁₀ aryl group, and a succinic acid group, each of which is substituted with a sulfonic acid group which is in the form of an ammonium, a sodium or a potassium salt thereof, or vinyl sulfonate compounds having a vinyl group bonded to a sulfonic acid group which is in the form of an ammonium, a sodium or a potassium salt thereof. Further, in the present invention, it is preferred that the sulfate ester group-containing ethylenically unsaturated monomer of the emulsifier (B) be selected from radically polymerizable double bond-containing compounds having a sulfate ester group, or an ammonium or an alkali metal salt thereof. Among these compounds, more preferred are radically polymerizable double bond-containing compounds having a substituent selected from the group consisting of a C₁-C₂₀ alkyl group, a C₂-C₄ alkyl ether group, a poly-C₂-C₄ alkyl ether group and a C₆ or C₁₀ aryl group, each of which is substituted with a sulfate ester group which is in the form of an ammonium, a sodium or a potassium salt thereof.

Specific examples of compounds having a succinic

acid group which is substituted with a sulfonic acid group which is in the form of an ammonium, a sodium or a potassium salt thereof include allylsulfosuccinates which, for example, can be represented by a formula selected from the following formulae (2), (3), (4) and (5):

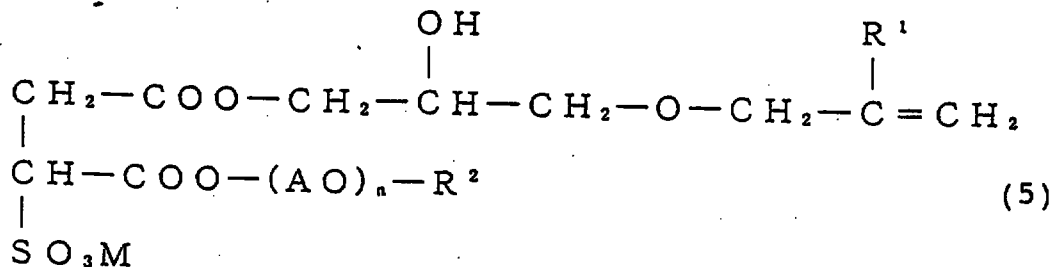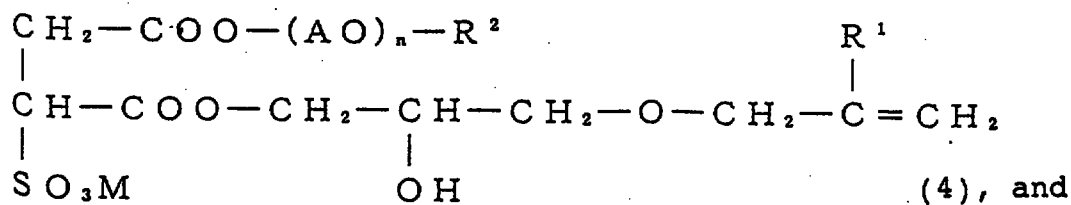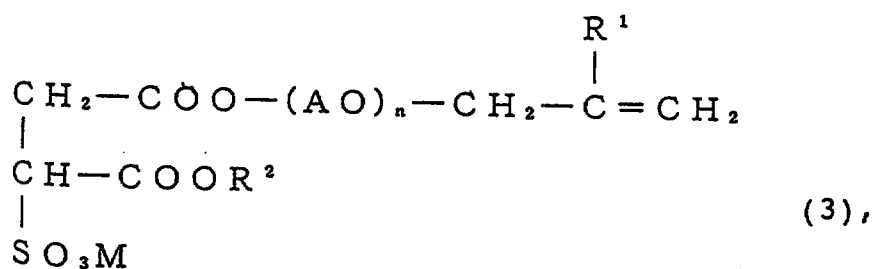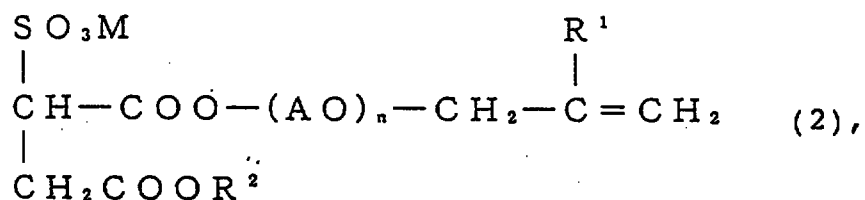


wherein R^1 represents a hydrogen atom or a methyl group; R^2 represents a hydrocarbon group, such as a C_1 - C_{20} alkyl group, a C_1 - C_{20} alkenyl group, a C_5 - C_{12} cycloalkyl group, a C_5 - C_{10} aryl group or a C_6 - C_{19} aralkyl group, each of which is unsubstituted or partially substituted with a hydroxyl group, a carboxyl group or the like, or an organic group containing an alkylene oxide, such as a polyoxyalkylene alkyl ether group (in which the alkylene moiety has 2 to 4 carbon atoms and the alkyl moiety has 0 to 20 carbon atoms) or a polyoxyalkylene alkylphenyl ether group (in which the alkylene moiety has 2 to 4 carbon atoms and an alkyl moiety has 0 to 20 carbon atoms); A represents the unsubstituted or substituted C_2 - C_4 alkylene group; n represents an integer of from 0 to 200; and M represents an ammonium group, a sodium atom or a potassium atom.


- Specific examples of commercially available products which comprise compounds represented by formulae (2) and (3) above include Eleminol[®] JS-2 (manufactured and sold by SANYO CHEMICAL INDUSTRIES, LTD., Japan). Specific examples of commercially available

products which comprise compounds represented by formulae (4) and (5) above include Latemul[®] S-120, S-180A and S-180 (manufactured and sold by Kao Corp., Japan).

5 Specific examples of compounds having a C₂-C₄ alkyl ether group or a poly-C₂-C₄ alkyl ether group, each of which is substituted with a sulfonic acid group which is in the form of an ammonium, a sodium or a potassium salt thereof, include compounds represented
10 by a formula selected from the following formulae (6) and (7):

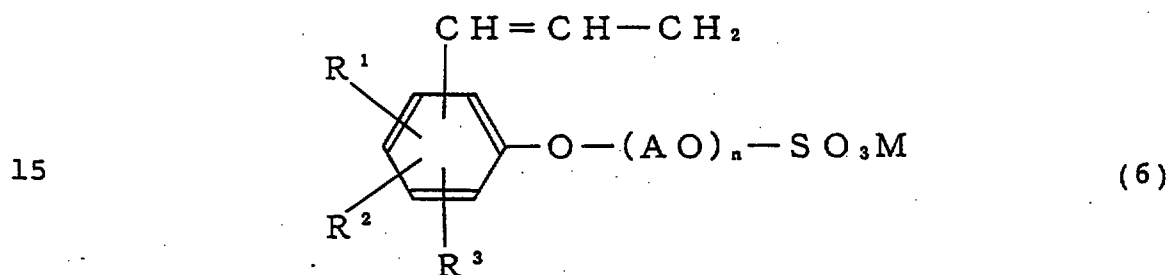

20 wherein R¹ represents a C₆-C₁₈ alkyl, alkenyl or aralkyl group; R² represents a C₆-C₁₈ alkyl, alkenyl or aralkyl group; R³ represents a hydrogen atom or a propenyl group; A represents C₂-C₄ alkylene group; n represents an integer of from 1 to 200; and M
25 represents an ammonium group, a sodium atom or a potassium atom, and

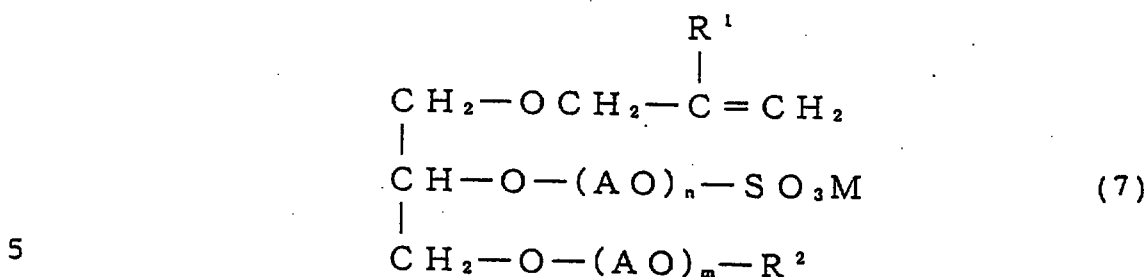

wherein R^1 represents a hydrogen atom or a methyl group; R^2 represents a C_8 - C_{24} alkyl or acyl group; A represents C_2 - C_4 alkylene group; n represents an integer of from 0 to 20; m represents an integer of from 0 to 50; and M represents an ammonium group, a sodium atom or a potassium atom.

10

Specific examples of alkylphenol ether compounds represented by formula (6) above include Aquaron[®] HS-10 (manufactured and sold by Dai-ichi Kogyo Seiyaku Co., Ltd., Japan). Specific examples of compounds represented by formula (7) above include Adeka Rea soap[®] SE-1025N (manufactured and sold by ASAHI DENKA KOGYO K.K., Japan).

15

20

Specific examples of compounds having a C_6 or C_{10} aryl group which is substituted with a sulfonate group include a p-styrenesulfonic acid which is in the form of an ammonium, a sodium or a potassium salt thereof.

25

Specific examples of compounds having a C_1 - C_{20} alkyl group which is substituted with a sulfonate group include methylpropanesulfonacrylamide which is in the form of an ammonium, a sodium or a potassium salt thereof, a sulfoalkyl acrylate which is in the form of an ammonium, a sodium or a potassium salt thereof, and sulfoalkyl methacrylate which is in the form of an ammonium, a sodium or potassium salt thereof. Specific examples of sulfonate group-containing compounds other than mentioned above include a vinyl sulfonate compound having a vinyl group bonded to a sulfonic acid group which is in the form of an ammonium, a sodium or a potassium salt thereof.

As specific examples of compounds having a C_2 - C_4 alkyl ether group or a poly- C_2 - C_4 alkyl ether group, each of which is substituted with a sulfate ester group which is in the form of an ammonium, a sodium or a potassium salt thereof, there can be mentioned the same compounds as represented by formula (6) or (7) above, which compounds are mentioned above as examples of compounds having an alkyl ether group substituted with a sulfonate group.

These ethylenically unsaturated monomer used as emulsifier (B) can be present in the emulsion in any of the following states:

- (i) the ethylenically unsaturated monomer is present in the emulsion as a copolymer thereof with the emulsified particles of the acrylate polymer emulsion, which copolymer is formed by radical polymerization;
- 5 (ii) the ethylenically unsaturated monomer is adsorbed on the emulsified particles of the acrylate polymer emulsion or present in the aqueous phase of the acrylate polymer emulsion, in the form of an unreacted monomer; and
- 10 (iii) the ethylenically unsaturated monomer is adsorbed on the emulsified particles of the acrylate polymer emulsion or present in the aqueous phase of the acrylate polymer emulsion, in the form of a copolymer thereof with a water-soluble monomer or a polymer of
- 15 the ethylenically unsaturated monomers.

In this connection, it is noted that the higher the ratio of the ethylenically unsaturated monomers which are present in state (i) above, the higher the water resistance of the coating formed from the final emul-


20 sion.

The ethylenically unsaturated monomer used as emulsifier (B) can be identified by subjecting a coating obtained from the emulsion to a pyrolysis gas chromatography/mass spectrometry (Py-GC-MS) or a pyrolysis mass spectrometry (Py-MS). Alternatively, the

25

ethylenically unsaturated monomers can be identified by a method in which the aqueous phase is separated from the emulsion and the residue is subjected to fast atom bombardment mass spectrometry (FAB mass spectrometry).

5 In the present invention, the silicone structure-containing modifier (C) comprises a silicone structure-containing silane (I) represented by the formula:



wherein R^1 represents a hydrogen atom, a C_1 - C_{16} aliphatic hydrocarbon group, a C_5 - C_{10} aryl group, a C_5 - C_6 cycloalkyl group, a vinyl group, an acrylic C_1 - C_{10} alkyl group or a methacrylic C_1 - C_{10} alkyl group, and each R^2 independently represents a C_1 - C_8 alkoxy group, an acetoxy group or a hydroxyl group.


20 The term "(meth)acrylic alkyl group" used herein means a group derived from an alkyl (meth)acrylate, in which group the alkyl moiety has a free bond.

In formula (I) above, it is preferred that R^1 represent a methyl group, a phenyl group, a vinyl group or a γ -(meth)acryloxypropyl group and each R^2 independ-

25

ently represent a methoxyl group, an ethoxyl group a propoxyl group, a methoxyethoxyl group or a hydroxyl group. Preferred specific examples of silanes (I) represented by formula (I) above include methyltrimethoxysilane, phenyltrimethoxysilane, methyltriethoxysilane, phenyltriethoxysilane, isobutyltrimethoxysilane, vinyltriethoxysilane, γ -acryloxypropyltrimethoxysilane, γ -acryloxypropyltriethoxysilane, γ -methacryloxypropyltrimethoxysilane and γ -methacryloxypropyltriethoxysilane. These silanes may be contained in modifier (C) individually or in combination.

In the present invention, the silicone structure-containing modifier (C) may further comprise at least one member selected from the group consisting of a cyclic silane, a hydrolyzable group-containing linear siloxane and a silane (II) represented by the formula:




wherein each R^3 independently represents a hydrogen atom, a C_1 - C_{16} aliphatic hydrocarbon group, a C_5 - C_{10} aryl group, a C_5 - C_6 cycloalkyl group, a vinyl group, an acrylic C_1 - C_{10} alkyl group or a methacrylic C_1 - C_{10} alkyl group, each R^4 independently repre-

sents a C₁-C₈ alkoxyl group, an acetoxyl group or a hydroxyl group, and n is 0, 2 or 3.

5 The molar ratio of the silane (I) to at least one member selected from the group consisting of a cyclic silane, a hydrolyzable group-containing linear siloxane and a silane (II) may be at least 10/100, preferably 35/100 or more.

10 In the present invention, the silicone structure-containing modifier (C) may further comprise at least one member selected from the group consisting of a cyclic silane and a silane (III) represented by the formula:



wherein each R³ independently represents a hydrogen atom, a C₁-C₁₆ aliphatic hydrocarbon group, a C₅-C₁₀ aryl group, a C₅-C₆ cycloalkyl group, a vinyl group, an acrylic
20 - C₁-C₁₀ alkyl group or a methacrylic C₁-C₁₀ alkyl group, and each R⁴ independently represents a C₁-C₈ alkoxyl group, an acetoxyl group or a hydroxyl group.

25 The molar ratio of the silane (I) to at least one



member selected from the group consisting of a cyclic silane and a silane (III) may be at least 10/100, preferably 35/100 or more.

5 In formulae (II) and (III) above, it is especially preferred that each R^3 independently represent a methyl group or a phenyl group, and each R^4 independently represent a methoxyl group, an ethoxyl group, a propoxyl group, a butoxyl group, a methoxyethoxyl group or a hydroxyl group.




10 With respect to the modifier (C), it is especially preferred that the modifier (C) further comprise at least one member selected from the group consisting of a cyclic silane and silane (III) represented by formula (III). By the use of silane (III) or a cyclic silane
15 in combination with silane (I), it becomes possible to lower the cross-linking density of a silicone polymer formed from modifier (C), thereby preventing the silicone polymer from having a complicated structure, so that a coating obtained from the emulsion can be im-
20 parted with a softness.

- Specific examples of silanes of formula (II), exclusive of those which are represented by formula (III), include phenyltrimethoxysilane, trimethylmethoxysilane and tetraethoxysilane.

25 Examples of hydrolyzable group-containing linear



siloxanes include compounds represented by a formula
selected from the following formulae (IV), (V) and (VI):

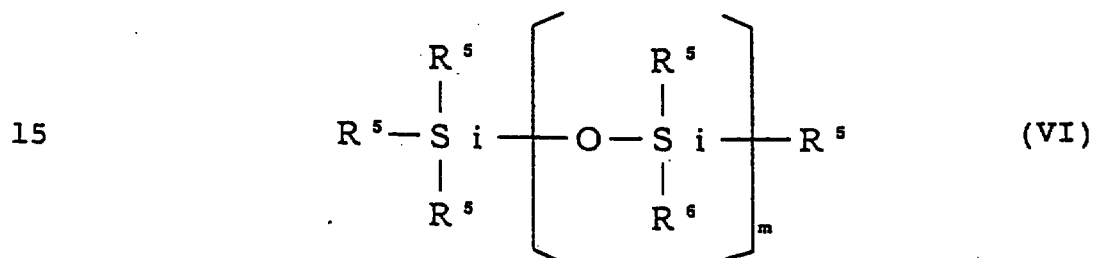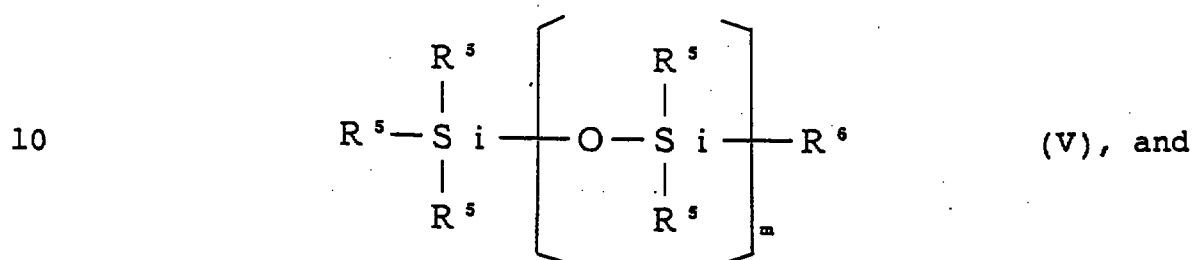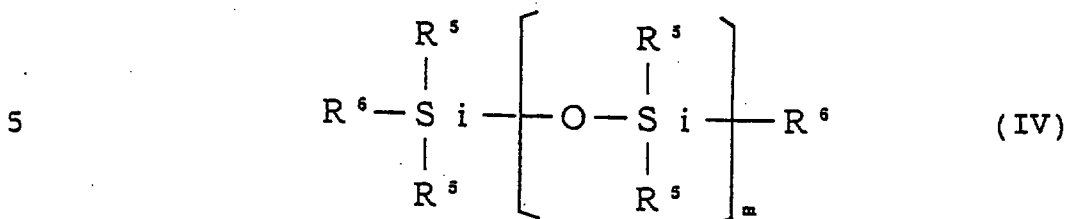

20

wherein each R^5 independently represents a
hydrogen atom, a C_1 - C_{16} aliphatic hydrocar-
bon group, a C_5 - C_{10} aryl group, a C_5 or C_6
cycloalkyl group, a vinyl group, an acrylic
 C_1 - C_{10} alkyl group or a methacrylic C_1 - C_{10}
alkyl group; each R^6 independently repre-
25 sents a C_1 - C_8 alkoxyl group, an acetoxyl



group, a hydroxyl group, an epoxy group or an ethylene oxide group; and m represents an integer of from 1 to 999.

Specific examples of silane (III) include dimeth-
5 yldimethoxysilane, diphenyldimethoxysilane, dime-
thyldiethoxysilane, diphenyldiethoxysilane, methylphe-
nyldimethoxysilane and γ -methacryoxypropylmethyldimet-
hoxysilane.

Examples of cyclic silanes which can be used in
10 the present invention include octamethylcyclotetrasiloxane, octaphenylcyclotetrasiloxane, hexamethylcyclotrisiloxane, decamethylcyclopentasiloxane and tetramethyl-
tetravinylcyclotetrasiloxane. With respect to these
cyclic silanes, reference can be made to Canadian
15 Patent No. 842947.

In addition to at least one compound selected from the group consisting of the above-mentioned silane (II), silane (III), cyclic silane and linear siloxane, the modifier (C) can further comprise a chlorosilane,
20 such as methylchlorosilane, methyldichlorosilane, dimethyldichlorosilane, trimethylchlorosilane, phenyltrichlorosilane, diphenylchlorosilane, vinylchlorosilane, γ -(meth)acryloxypropyltrichlorosilane and γ -(meth)acryloxypropyldichloromethylsilane.

25 In the present invention, when the above-mentioned

modifier (C) is introduced into an emulsion polymerization system comprising the monomer system (A) and the specific emulsifier (B), the silane undergoes hydrolysis and condensation, so that a silicone is formed in the emulsified particles of the acrylate polymer emulsion obtained. Accordingly, due to the silicone formed in the emulsified particles of the acrylate polymer emulsion, a coating formed from the emulsion has an extremely excellent weatherability and gloss retentivity. For example, when a coating formed from a paint comprising a conventional acrylic emulsion having a titanium dioxide or the like incorporated therein is exposed to outdoor conditions for a prolonged period of time, the coating rapidly loses luster, and also exhibits a low gloss retentivity, whereas, even when a coating obtained from a paint comprising the aqueous, silicone-modified acrylate polymer emulsion of the present invention having a titanium dioxide or the like incorporated therein is exposed to outdoor conditions, the coating is unlikely to lose luster, and exhibits excellent gloss retentivity.

The presence of the above-mentioned condensation product of silane can be identified by means of ^{29}Si -NMR (^{29}Si nuclear magnetic resonance) or ^1H -NMR (proton nuclear magnetic resonance). For example, the presence

of the condensation product of silane (I) can be identified by the presence of a peak at -40 to -80 ppm with respect to the chemical shift of ^{29}Si -NMR. The presence of the condensation product of silane (III) or
5 a cyclic silane is identified by the presence of a peak at -16 to -26 ppm with respect to the chemical shift of ^{29}Si -NMR.

In the present invention, it is preferred that the modifier (C) be added to the emulsion polymerization
10 system, so that the silicone-modification of the emulsion is performed during the emulsion polymerization.

According to a preferred embodiment of the present invention, there is provided an aqueous, silicone-modified acrylate emulsion, wherein the monomer system
15 (A) is comprised of monomer systems (A^1) and (A^2), each comprising the acrylate monomer, and the emulsifier (B) is comprised of emulsifiers (B^1) and (B^2), each selected from the group consisting of the sulfonic acid group- or sulfonate group-containing ethylenically
20 unsaturated monomer, the sulfate ester group-containing ethylenically unsaturated monomer and a mixture thereof, with the proviso that monomer systems (A^1) and (A^2) are the same or different, and emulsifiers (B^1) and (B^2) are the same or different, and wherein the emul-
25 sion polymerization is conducted in a sequence of step

(1) and step (2), wherein in step (1), the monomer system (A^1) is subjected to emulsion polymerization in an aqueous medium in the presence of the emulsifier (B^1) to thereby obtain a preliminary aqueous acrylate polymer emulsion having a seed latex dispersed therein, and in step (2), the monomer system (A^2) and the emulsifier (B^2), optionally with an aqueous medium, are added to the preliminary aqueous acrylate polymer emulsion to effect emulsion polymerization thereof, thereby producing a final aqueous acrylate polymer emulsion, wherein the silicone-modification is performed using the silicone structure-containing modifier (C) during or after the emulsion polymerization.

In step (2) above, the modifier (C) can be added to the emulsion polymerization system to thereby perform the silicone-modification during the emulsion polymerization. Alternatively, the final aqueous acrylate emulsion can be treated with the modifier (C) to thereby perform the silicone-modification after the emulsion polymerization.

In step (1) above, the monomer system (A^1) and the emulsifier (B^1) can be, respectively, used in an amount of from 80 to 99.95 % by weight, preferably from 90 to 99.9 % by weight, and in an amount of from 0.05 to 20 % by weight, preferably from 0.1 to 10 % by weight, based

on the total weight of the monomer system (A^1) and the emulsifier (B^1). In step (2) above, the monomer system (A^2) and the emulsifier (B^2) can be, respectively, used in an amount of from 80 to 99.95 % by weight, preferably from 90 to 99.9 % by weight, and in an amount of from 0.05 to 20 % by weight, preferably from 0.1 to 10 % by weight, based on the total weight of the monomer system (A^2) and the emulsifier (B^2). The silicone structure-containing modifier (C) can be used in an amount which satisfies the following relationships:

$$\frac{1}{2} \leq \frac{(A^1) + (A^2) + (B^1) + (B^2)}{(C)} \leq \frac{99}{1}$$

wherein (A^1), (A^2), (B^1), (B^2) and (C), respectively, represent amounts of monomer system (A^1), monomer system (A^2), emulsifier (B^1), emulsifier (B^2) and modifier (C) in terms of weight percentages based on the total weight of materials (A^1), (A^2), (B^1), (B^2) and (C).

The ratio of the total weight of the monomer system (A^1) and the emulsifier (B^1) to the total weight of the monomer system (A^2) and the emulsifier (B^2) is from 1/99 to 99/1, preferably from 5/95 to 95/5.

When (A¹), (A²), (B¹), (B²) and (C) are used in the amount relationships as defined above, the emulsion can be very stably obtained and the obtained emulsion is capable of forming a coating which has especially excellent water resistance and weatherability.

In step (1) above, it is preferred that the monomer system (A¹) contain 0.5 to 30 % by weight, more preferably 1 to 20 % by weight, of a carboxylic acid group-containing ethylenically unsaturated monomer, based on the weight of the monomer system (A¹). In step (2) above, the monomer system (A²) may or may not contain 1 to 2 % by weight of a carboxylic acid group-containing ethylenically unsaturated monomer, based on the weight of the monomer system (A²). The above-mentioned carboxylic acid group-containing ethylenically unsaturated monomer can be preferably employed, since it functions also as a catalyst to facilitate the hydrolyzation reaction and condensation reaction of the above-mentioned hydrolyzable group-containing silane.

In the present invention, it is preferred that the silicon content of a polymer comprising components (A), (B) and (C) be from 1 to 10 % by weight, based on the weight of the polymer. When the silicon content is within the range as mentioned above, the emulsion can be very stably obtained, and the obtained emulsion can

form a coating which has especially excellent water resistance and weatherability.

For producing the aqueous, silicone-modified acrylate polymer emulsion of the present invention, a conventional emulsion polymerization method can be employed. However, in the case where, in accordance with the above-mentioned preferred embodiment, the emulsion polymerization is conducted in a sequence of two steps [step (1) and step (2)] [wherein a preliminary aqueous acrylate polymer emulsion having a seed latex dispersed therein is prepared in step (1), and the preliminary aqueous acrylate polymer emulsion obtained in step (1) is further subjected to emulsion polymerization in step (2)], the two-step emulsion polymerization can be practiced in either of the following two manners (i) and (ii):

(i) the modifier (C) is added to the preliminary aqueous acrylate polymer emulsion having a seed latex dispersed therein at the same temperature as used in the polymerization of the preliminary aqueous acrylate polymer emulsion, and subsequently, each of the monomer system (A^2) and emulsifier (B^2) is introduced to the reaction system at a time or in a stepwise manner during the course of polymerization of a silane of the modifier (C); and

(ii) each of the modifier (C), monomer system (A²) and emulsifier (B²) is simultaneously added at a time or in a stepwise manner to the preliminary aqueous acrylate emulsion having a seed latex dispersed therein
5 at the same temperature as used in the polymerization of the preliminary aqueous acrylate polymer emulsion. These two manners can be employed individually or in combination. The manner of two-step emulsion polymerization is not limited to the above two manners.

10 Generally, the hydrogen ion concentration during the preparation of the preliminary aqueous acrylate polymer emulsion in step (1) and during the emulsion polymerization in step (2) is adjusted so as to give a pH value of 4.0 or less, preferably 3.0 or less.

15 In the present invention, the emulsion polymerization is conducted in an aqueous medium. As an aqueous medium, water is generally used. Alternatively, an aqueous solution of a water-soluble solvent, such as a lower alcohol having 1 to 3 carbon atoms or acetone,
20 can be employed as an aqueous medium. In this case, the content of the solvent in the emulsion is preferably 20 % or less. With respect to the obtained final emulsion, it is preferred that weight ratio of dispersed phase (solids) to aqueous medium as a dispersion
25 medium be 70/30 or less, more preferably from 30/70 to

65/35.

In practicing the emulsion polymerization, a compound, which is decomposable by heat or a reducing agent to generate radicals and thereby initiate an addition polymerization reaction of the ethylenically unsaturated monomer, can be advantageously employed as a radical polymerization catalyst. Examples of such compounds include a water-soluble or oil-soluble persulfates, peroxides, and azobis compounds. Specific examples of such compounds include potassium persulfate, sodium persulfate, ammonium persulfate, hydrogen peroxide, t-butyl hydroperoxide, t-butyl peroxybenzoate, 2,2-azobisisobutyronitrile, 2,2-azobis(2-diaminopropane)hydrochloride and 2,2-azobis(2,4-dimethylvaleronitrile). Of these, especially preferred is potassium persulfate, sodium persulfate and ammonium persulfate, which are effective also as a catalyst to facilitate the hydrolyzation reaction and condensation reaction of the hydrolyzable silane. The radical polymerization catalyst is generally used in an amount of from 0.1 to 1 % by weight, based on the weight of the ethylenically unsaturated monomer.

Generally, it is preferred that emulsion polymerization be conducted at a temperature of from 65 to 90 °C under atmospheric pressure. However, the emul-



sion polymerization can be conducted under high pressure, so as to, for example, prevent the monomers from being vaporized at the polymerization temperature. The polymerization time comprises an introduction time and a maturation (cooking) time. With respect to the introduction time, when each of the materials is introduced to a reaction system at a time, the introduction time is generally several minutes. When the raw materials are stepwise introduced to a reaction system, the introduction of the raw materials is conducted in a manner such that the heat generated in the polymerization reaction can be removed. Therefore, in this case, the introduction time may vary, depending on the desired content of the polymer in a final emulsion. However, the introduction time is generally 10 minutes or more. With respect to the maturation (cooking) time, it is preferred that the maturation time be 10 minutes or more. When the polymerization time is shorter than the period of time as mentioned above, there is a danger that not only does the raw materials remain unreacted, but also the hydrolyzable silanes are not condensed and remain as they are. When it is desired to increase the rate of polymerization or when it is desired to perform a polymerization reaction at a temperature as low as 70 °C or less, it is advantageous



to use a reducing agent, such as sodium bisulfite, ferrous chloride, ascorbate and Rongalit, in combination with a radical polymerization catalyst. Further, if desired, in order to control the molecular weight of the polymer, a chain transfer agent, such as dodecylmercaptan, can be used.

In the present invention, in addition to the above-mentioned emulsifier (B) which is selected from the group consisting of a sulfonic acid group- or sulfonate group-containing ethylenically unsaturated monomer, a sulfate ester group-containing ethylenically unsaturated monomer and a mixture thereof, a conventional surfactant can be used in combination with the emulsifier (B). Examples of conventional surfactants which can be used in combination with the emulsifier (B) include anionic surfactants, such as a fatty acid soap, an alkyl sulfonate, an alkyl sulfosuccinate, a polyoxyethylene alkyl sulfate, a polyoxyethylene alkylarylsulfate; non-reactive nonionic surfactants, such as a polyoxyethylene alkylarylether, a sorbitan fatty acid ester of polyoxyethylene and an oxyethylene-oxypropylene block copolymer; and reactive nonionic surfactants, such as α -{1-[(allyloxy)methyl]-2-(nonylphenoxy)ethyl}- ω -hydroxypolyoxyethylene [e.g., Adeka Rea soap NE-20, NE-30 and NE-40 (manufactured and sold by

ASAHI DENKA KOGYO K.K., Japan)], a polyoxyethylene alkylpropenylphenylether [e.g., Aquaron RN-10, RN-20, RN-30 and RN-50 (manufactured and sold by Dai-ichi Kogyo Seiyaku Co., Ltd., Japan)].

5 With respect to the amount of the conventional surfactant in terms of % by weight, based on the weight of the emulsion: an anionic surfactant can be used in an amount of 0.5 % by weight or less, preferably 0.25 % by weight or less, more preferably 0.1 % by weight or
10 less; and a non-reactive nonionic surfactant or a reactive nonionic surfactant can be used in an amount of 2.0 % by weight or less, preferably 1.0 % by weight or less, more preferably 0.5 % by weight or less. When the conventional surfactants are used in amounts which
15 exceed the above ranges, a coating formed from the obtained aqueous, silicone-modified acrylate polymer emulsion has disadvantageously low water resistance.

 In the present invention, after the termination of emulsion polymerization, a curing catalyst can be added
20 to the aqueous, silicone-modified acrylate polymer emulsion to facilitate the formation of a coating. Examples of curing catalysts usable in the present invention include metal salts, such as dibutyltin dilaurate, dioctyltin dilaurate, dibutyltin diacetate,
25 tin octylate, tin laurate, iron octylate, lead octylate

and tetrabutyl titanate; and amine compounds, such as n-hexylamine and 1,8-diazabicyclo[5,4,0]-7-undecene.

When a water-insoluble curing catalyst is used, it is desirable that such a catalyst be emulsified using a
5 surfactant and water prior to use.

In the present invention, from the viewpoint of maintaining the dispersion stability of the aqueous, silicone-modified acrylate polymer emulsion for a prolonged period of time, it is preferred that the pH
10 value of the emulsion be adjusted to 5 to 10, using ammonia, sodium hydroxide, potassium hydroxide, and amines, such as dimethylaminoethanol.

In the aqueous, silicone-modified acrylate polymer emulsion of the present invention, it is preferred that
15 the average particle diameter of the dispersed phase be from 10 to 1000 nm.

The aqueous, silicone-modified acrylate emulsion of the present invention can be advantageously used as a paint, an undercoating or finish coating material for
20 building materials, an adhesive, a pressure-sensitive adhesive, a processing agent for papers, or a finish coating material for textile fabrics. Especially, the aqueous, silicone-modified acrylate emulsion of the present invention can be advantageously used as a
25 paint, or a finish coating material for building mate-

rials.

If desired, other components, which are conventionally used in aqueous paints, e.g., a coating formation promoter, a thickening agent, an anti-foaming agent, a pigment, a dispersant, a dye and an antiseptic agent, can be added to the aqueous, silicone-modified acrylate polymer emulsion of the present invention.

Best Mode for Carrying Out the Invention

Hereinbelow, the present invention will be described in more detail with reference to the following Examples and Comparative Examples, but they should not be construed as limiting the scope of the present invention.

In Examples and Comparative Examples, the "part(s)" and "%" are given by weight unless otherwise specified. Further, with respect to the properties of the aqueous, silicone-modified acrylate polymer emulsions obtained in Examples and Comparative Examples, sample paints having the following composition were prepared using respective emulsions, and examination was made in accordance with the methods described below.

Composition for paint

Pigment dispersion

25	Water	82.5 parts
----	-------	------------

	Poiz 530 (dispersant: manufactured and sold by Kao Corp., Japan)	7.5 parts
	5 % aqueous solution of sodium tripolyphosphate	7.5 parts
5	3 % aqueous solution of Daicel HEC SP-600 (thickening agent: manufactured and sold by Daicel Chemical Industries, Ltd., Japan)	25.0 parts
10	Nopco 1497VD. (anti-foaming agent: manufactured and sold by San Nopco K.K., Japan)	2.5 parts
	Tipaque R-930 (rutile titanium oxide: manufactured and sold by ISHIHARA SANGYO KAISHA, LTD., Japan)	375.0 parts
15	<u>Let-down components</u>	
	Emulsion (solids component)	460.0 parts
	Ethylene glycol monobutyl ether	60.0 parts
	Ethylene glycol mono(2-ethylhexyl) ether	10.0 parts
20	Water	30.0 parts
	Nopco 1497VD	1.0 parts

Examination Method

- (i) Initial gloss value and gloss retentivity
- The above-mentioned pigment dispersion and let-
- 25 down components are mixed, thereby preparing a paint.

The obtained paint was coated on an anodized aluminium plate (anodized by sulfuric acid) by means of wire coater No. 50, and dried at room temperature for 30 days. The initial gloss value of the coated paint (coating) was measured in terms of the $60^\circ - 60^\circ$ mirror reflectance (%) (each of angle of incidence and angle of reflection: 60°) (the time when the measurement was conducted is defined as the initiation time of examination, i.e., 0 hour after the initiation of the examination). Subsequently, the coating was subjected to an exposure test (rainfall cycle: 12 min/hr; temperature of black panel: $60 - 66^\circ\text{C}$) by means of a sunshine-type weatherometer (WEL-SUN-DC: manufactured and sold by Suga Shiken-ki K.K., Japan). The final gloss value of the coating was measured in terms of the $60^\circ - 60^\circ$ mirror reflectance (%) after 3000 hours of exposure. The percentage of the final gloss value based on the initial gloss value is defined as the gloss retentivity.

(ii) Water resistance

A paint prepared in substantially the same manner as in (i) above was coated on an anodized aluminium plate (anodized by sulfuric acid) by means of wire coater No. 50 and dried at room temperature for 2 hours. The coated paint was further dried at 50°C for

2 days and, then, immersed in water having a temperature of 40 °C for 30 days. The condition of the coated paint (coating) was evaluated by visual observation in terms of the following 4 criterions.

5 Criterions

◎ : No blistering or lowering of luster is observed.

○ : Slight blistering is observed, but no lowering of luster is observed.

△ : Blistering and lowering of luster are observed.

10 × : Blistering is observed on overall surface of the coating, and luster is markedly lowered.

Example 1

300 Parts of water, 52 parts of methyl methacrylate, 40 parts of butyl acrylate, 8 parts of methacrylic acid and 20 parts of a 20 % aqueous solution of Latemul S-180A (ammonium salt of diester of sulfosuccinic acid, which has a double bond and is copolymerizable with an ethylenically unsaturated monomer) (manufactured and sold by Kao Corp., Japan) were charged in a reactor having a stirrer, a reflux condenser, dropping tanks and a thermometer. After elevating the temperature in the reactor to 78 °C, 0.5 part of ammonium persulfate was added to the reactor, and the resultant mixture was allowed to stand for 1 hour, thereby obtaining a preliminary aqueous acrylate poly-

15

20

25

mer emulsion having a seed latex dispersed therein. The hydrogen ion concentration of the obtained preliminary aqueous acrylate polymer emulsion was measured to give a pH value of 1.8. Then, 2 types of liquid mix-
5 tures, i.e., a liquid mixture of 330 parts of water, 207 parts of methyl methacrylate, 190 parts of butyl acrylate, 3 parts of methacrylic acid, 20 parts of a 20 % aqueous solution of Latemul S-180A and 1.0 part of ammonium persulfate, and a liquid mixture of 2.5 parts
10 of γ -methacryloxypropyltrimethoxysilane, 25 parts of dimethyldimethoxysilane and 25 parts of methyltrimethoxysilane, were individually dropped into the reactor from separate dropping tanks over 3 hours. During the dropping of the above-mentioned liquid mixtures into
15 the reactor, the temperature in the reactor was maintained at 80 °C. After completion of the dropping of the liquid mixtures into the reactor, the temperature in the reactor was elevated to 85 °C and the mixture was allowed to stand for 6 hours. After cooling the
20 mixture in the reactor to room temperature, the hydrogen ion concentration thereof was measured to give a pH value of 2.1. A 25 % aqueous solution of ammonia was added to the mixture in the reactor to thereby adjust the pH value thereof to 8. Then, the resultant mixture
25 was filtered by means of a 100-mesh metal wire net to

thereby obtain a final aqueous, silicone-modified acrylate polymer emulsion. The amount of filtered-off aggregates was as small as 0.02 % by weight (on a dry basis), based on the total weight of the monomers.

5 With respect to the obtained emulsion, the solids content of the emulsion was 44.0 %, and the average particle diameter of the dispersed phase of the emulsion was 1080 Å. Using this emulsion, a paint was prepared, and the paint thus prepared was examined with
10 respect to the initial gloss value, gloss retentivity and water resistance. Results are shown in Table 1.

Example 2

300 Parts of water, 37 parts of methyl methacrylate, 40 parts of butyl acrylate, 15 parts of cyclohexyl methacrylate, 8 parts of methacrylic acid and 20
15 parts of a 20 % aqueous solution of Latemul S-180A (ammonium salt of diester of sulfosuccinic acid, which has a double bond and is copolymerizable with an ethylenically unsaturated monomer) (manufactured and sold
20 by Kao Corp., Japan) were charged in a reactor having a stirrer, a reflux condenser, dropping tanks and a thermometer. After elevating the temperature in the reactor to 78 °C, 0.5 part of ammonium persulfate was added to the reactor, and the resultant mixture was
25 allowed to stand for 1 hour, thereby obtaining a pre-

liminary aqueous acrylate polymer emulsion having a seed latex dispersed therein. The hydrogen ion concentration of the obtained preliminary aqueous acrylate polymer emulsion was measured to give a pH value of 1.8. Then, 2 types of liquid mixtures, i.e., a liquid mixture of 330 parts of water, 177 parts of methyl methacrylate, 160 parts of butyl acrylate, 60 parts of cyclohexyl methacrylate, 3 parts of methacrylic acid, 20 parts of a 20 % aqueous solution of Latemul S-180A and 1.0 part of ammonium persulfate, and a liquid mixture of 2.5 parts of γ -methacryloxypropyltrimethoxysilane, 25 parts of dimethyldimethoxysilane and 25 parts of methyltrimethoxysilane, were individually dropped into the reactor from separate dropping tanks over 3 hours. During the dropping of the above-mentioned liquid mixtures into the reactor, the temperature in the reactor was maintained at 80 °C. After completion of the dropping of the liquid mixtures into the reactor, the temperature in the reactor was elevated to 85 °C and the mixture was allowed to stand for 6 hours. After cooling the mixture in the reactor to room temperature, the hydrogen ion concentration thereof was measured to give a pH value of 2.1. A 25 % aqueous solution of ammonia was added to the mixture in the reactor to thereby adjust the pH value thereof to

8. Then, the resultant mixture was filtered by means of a 100-mesh metal wire net to thereby obtain a final aqueous, silicone-modified acrylate polymer emulsion. The amount of filtered-off aggregates was as small as 0.02 % by weight (on a dry basis), based on the total weight of the monomers. With respect to the obtained emulsion, the solids content of the emulsion was 44.0 %, and the average particle diameter of the dispersed phase of the emulsion was 1080 Å. Using this emulsion, a paint was prepared, and the paint thus prepared was examined with respect to the initial gloss value, gloss retentivity and water resistance. Results are shown in Table 1.

Comparative Example 1

300 Parts of water, 52 parts of methyl methacrylate, 40 parts of n-butyl acrylate, 8 parts of methacrylic acid, 4 parts of a 40 % aqueous solution of sodium dioctylsulfosuccinate (Pelex[®] OT-P: manufactured and sold by Kao Corp., Japan) and 1 part of a 25 % aqueous solution of polyoxyethylene nonylphenyl ether (Emülgen[®] 950: manufactured and sold by Kao Corp., Japan) were charged in a reactor having a stirrer, a reflux condenser, dropping tanks and a thermometer. After elevating the temperature in the reactor to 78 °C, 0.5 part of ammonium persulfate was added to the

reactor, and the resultant mixture was allowed to stand for 1 hour, thereby obtaining a preliminary aqueous acrylate polymer emulsion having a seed latex dispersed therein. The hydrogen ion concentration of the obtained preliminary aqueous acrylate polymer emulsion was measured to give a pH value of 1.8. Then, 2 types of liquid mixtures, i.e., a liquid mixture of 330 parts of water, 207 parts of methyl methacrylate, 190 parts of n-butyl acrylate, 3 parts of methacrylic acid, 5 parts of a 25 % aqueous solution of polyoxyethylene nonylphenyl ether (Emulgen[®] 950: manufactured and sold by Kao Corp., Japan) and 1.0 part of ammonium persulfate, and a liquid mixture of 2.5 parts of γ -methacryloxypropyltrimethoxysilane, 25 parts of dimethyldimethoxysilane and 25 parts of methyltrimethoxysilane, were individually dropped into the reactor from separate dropping tanks over 3 hours. During the dropping of the above-mentioned liquid mixtures into the reactor, the temperature in the reactor was maintained at 80 °C. After completion of the dropping of the liquid mixtures into the reactor, the temperature in the reactor was elevated to 85 °C and the mixture was allowed to stand for 6 hours. After cooling the mixture in the reactor to room temperature, the hydrogen ion concentration thereof was measured to give a pH

value of 2.2. A 25 % aqueous solution of ammonia was added to the mixture in the reactor to thereby adjust the pH value thereof to 8. Then, the resultant mixture was filtered by means of a 100-mesh metal wire net to
5 thereby obtain a final emulsion. The amount of filtered-off aggregates was as small as 0.02 % by weight (on a dry basis), based on the total weight of the monomers. With respect to the obtained emulsion, the solids content of the emulsion was 44.1 %, and the
10 average particle diameter of the dispersed phase of the emulsion was 1050 Å. Using this emulsion, a paint was prepared, and the paint thus prepared was examined with respect to the initial gloss value, gloss retentivity and water resistance. Results are shown in Table 1.

15 Comparative Example 2

300 Parts of water, 52 parts of methyl methacrylate, 40 parts of butyl acrylate, 8 parts of methacrylic acid and 20 parts of a 20 % aqueous solution of Latemul S-180A (ammonium salt of diester of sulfosuccinic acid, which has a double bond and is copolymerizable with an ethylenically unsaturated monomer) (manufactured and sold by Kao Corp., Japan) were charged in a reactor having a stirrer, a reflux condenser, dropping tanks and a thermometer. After elevating the
20 temperature in the reactor to 78 °C, 0.5 part of ammo-

nium persulfate was added to the reactor, and the resultant mixture was allowed to stand for 1 hour, thereby obtaining a preliminary aqueous acrylate polymer emulsion having a seed latex dispersed therein.

5 The hydrogen ion concentration of the obtained preliminary aqueous acrylate polymer emulsion was measured to give a pH value of 1.8. Then, a liquid mixture of 330 parts of water, 207 parts of methyl methacrylate, 190 parts of butyl acrylate, 3 parts of methacrylic acid,
10 20 parts of a 20 % aqueous solution of Latemul S-180A and 1.0 part of ammonium persulfate, and 50 parts of dimethyldimethoxysilane were individually dropped into the reactor from separate dropping tanks over 3 hours. During the dropping of the above-mentioned liquid
15 mixture and dimethyldimethoxysilane into the reactor, the temperature in the reactor was maintained at 80 °C. After completion of the dropping of the liquid mixture and dimethyldimethoxysilane into the reactor, the
20 temperature in the reactor was elevated to 85 °C and the mixture was allowed to stand for 6 hours. After cooling the mixture in the reactor to room temperature, the hydrogen ion concentration thereof was measured to give a pH value of 2.1. A 25 % aqueous solution of ammonia was added to the mixture in the reactor to
25 thereby adjust the pH value thereof to 8. Then, the

resultant mixture was filtered by means of a 100-mesh metal wire net to thereby obtain a final aqueous, silicone-modified acrylate polymer emulsion. The amount of filtered-off aggregates was as small as 0.02 % by weight (on a dry basis), based on the total weight of the monomers. With respect to the obtained emulsion, the solids content of the emulsion was 43.5 %, and the average particle diameter of the dispersed phase of the emulsion was 980 Å. Using this emulsion, a paint was prepared, and the paint thus prepared was examined with respect to the initial gloss value, gloss retentivity and water resistance. Results are shown in Table 1.

Comparative Example 3

300 Parts of water, 52 parts of methyl methacrylate, 40 parts of butyl acrylate, 8 parts of methacrylic acid and 20 parts of a 20 % aqueous solution of Latemul S-180A (ammonium salt of diester of sulfosuccinic acid, which has a double bond and is copolymerizable with an ethylenically unsaturated monomer) (manufactured and sold by Kao Corp., Japan) were charged in a reactor having a stirrer, a reflux condenser, dropping tanks and a thermometer. After elevating the temperature in the reactor to 78 °C, 0.5 part of ammonium persulfate was added to the reactor, and the

resultant mixture was allowed to stand for 1 hour, thereby obtaining a preliminary aqueous acrylate polymer emulsion having a seed latex dispersed therein. The hydrogen ion concentration of the obtained preliminary aqueous acrylate polymer emulsion was measured to give a pH value of 1.8. Then, a liquid mixture of 330 parts of water, 207 parts of methyl methacrylate, 190 parts of butyl acrylate, 3 parts of methacrylic acid, 20 parts of a 20 % aqueous solution of Latemul S-180A and 1.0 part of ammonium persulfate was dropped into the reactor from a dropping tank over 3 hours. During the dropping of the above-mentioned liquid mixture into the reactor, the temperature in the reactor was maintained at 80 °C. After completion of the dropping of the liquid mixture into the reactor, the temperature in the reactor was elevated to 85 °C and the mixture was allowed to stand for 6 hours. After cooling the mixture in the reactor to room temperature, the hydrogen ion concentration thereof was measured to give a pH value of 2.1. A 25 % aqueous solution of ammonia was added to the mixture in the reactor to thereby adjust the pH value thereof to 8. Then, the resultant mixture was filtered by means of a 100-mesh metal wire net to thereby obtain a final emulsion. The amount of filtered-off aggregates was as small as 0.02 % by weight

(on a dry basis), based on the total weight of the monomers. With respect to the obtained emulsion, the solids content of the emulsion was 43.0 %, and the average particle diameter of the dispersed phase of the emulsion was 1080 Å. Using this emulsion, a paint was prepared, and the paint thus prepared was examined with respect to the initial gloss value, gloss retentivity and water resistance. Results are shown in Table 1.

Example 3

300 Parts of water, 37 parts of methyl methacrylate, 40 parts of n-butyl acrylate, 15 parts of cyclohexyl methacrylate, 8 parts of methacrylic acid and 20 parts of a 20 % aqueous solution of Latemul S-180A (ammonium salt of diester of sulfosuccinic acid, which has a double bond and is copolymerizable with an ethylenically unsaturated monomer) (manufactured and sold by Kao Corp., Japan) were charged in a reactor having a stirrer, a reflux condenser, dropping tanks and a thermometer. After elevating the temperature in the reactor to 78 °C, 0.5 part of ammonium persulfate was added to the reactor, and the resultant mixture was allowed to stand for 1 hour, thereby obtaining a preliminary aqueous acrylate polymer emulsion having a seed latex dispersed therein. The hydrogen ion concentration of the obtained preliminary aqueous acrylate

polymer emulsion was measured to give a pH value of 1.9. Then, a liquid mixture of 2.5 parts of γ -methacryloxypropyltrimethoxysilane, 25 parts of dimethyldimethoxysilane and 25 parts of methyltrimethoxysilane was dropped into the reactor from a dropping tank over 5 minutes. Subsequently, a liquid mixture of 330 parts of water, 180 parts of methyl methacrylate, 160 parts of butyl acrylate, 60 parts of cyclohexyl methacrylate, 20 parts of a 20 % aqueous solution of Latemul S-180A and 1.0 part of ammonium persulfate was dropped into the reactor from another dropping tank over 3 hours. During the dropping of the above-mentioned liquid mixtures into the reactor, the temperature in the reactor was maintained at 80 °C.

After completion of the dropping of the liquid mixtures into the reactor, the temperature in the reactor was elevated to 85 °C and the mixture was allowed to stand for 6 hours. After cooling the mixture in the reactor to room temperature, the hydrogen ion concentration thereof was measured to obtain a pH value of 2.1. A 25 % aqueous solution of ammonia was added to the mixture in the reactor to thereby adjust the pH value thereof to 8. Then, the resultant mixture was filtered by means of a 100-mesh metal wire net to thereby obtain a final aqueous, silicone-modified

acrylate polymer emulsion. The amount of filtered-off aggregates was as small as 0.02 % by weight (on a dry basis), based on the total weight of the monomers. With respect to the obtained emulsion, the solids
5 content of the emulsion was 44.0 %, and the average particle diameter of the dispersed phase of the emulsion was 970 Å. Using this emulsion, a paint was prepared, and the paint thus prepared was examined with respect to the initial gloss value, gloss retentivity
10 and water resistance. Results are shown in Table 1.

Example 4

400 Parts of water, 122 parts of n-butyl methacrylate, 60 parts of methyl methacrylate, 18 parts of methacrylic acid and 30 parts of a 20 % aqueous solution of Latemul S-180A were charged in a reactor having
15 a stirrer, a reflux condenser, dropping tanks and a thermometer. After elevating the temperature in the reactor to 78 °C, 1.0 part of ammonium persulfate was added to the reactor, and the resultant mixture was
20 allowed to stand for 1 hour, thereby obtaining a preliminary aqueous acrylate polymer emulsion having a seed latex dispersed therein. The hydrogen ion concentration of the obtained preliminary aqueous acrylate polymer emulsion was measured to give a pH value of
25 1.7. Then, a liquid mixture of 50 parts of dimethyl-



dimethoxysilane and 50 parts of methyltrimethoxysilane was dropped into the reactor from a dropping tank over 5 minutes, while maintaining the temperature in the reactor at 60 °C and the resultant mixture was allowed to stand at 80 °C for 2 hours. Subsequently, a liquid mixture of 230 parts of water, 140 parts of n-butyl methacrylate, 150 parts of cyclohexyl methacrylate, 10 parts of methacrylic acid, 18 parts of a 20 % aqueous solution of sodium p-styrenesulfonate, 2 parts of a 20 % aqueous solution of sodium dodecylbenzenesulfonate and 1.0 part of ammonium persulfate, and 2.5 parts of γ -methacryloxypropyltrimethoxysilane were individually dropped into the reactor from separate dropping tanks over 3 hours. During the dropping of the above-mentioned liquid mixtures into the reactor, the temperature in the reactor was maintained at 80 °C. After completion of the dropping of the liquid mixtures into the reactor, the temperature in the reactor was elevated to 85 °C and the mixture was allowed to stand for 6 hours. After cooling the mixture in the reactor to room temperature, the hydrogen ion concentration thereof was measured to give a pH value of 2.0. A 25 % aqueous solution of ammonia was added to the mixture in the reactor to thereby adjust the pH value thereof to 8. Then, the resultant mixture was filtered by means

of a 100-mesh metal wire net to thereby obtain a final aqueous, silicone-modified acrylate polymer emulsion. The amount of filtered-off aggregates was as small as 0.02 % by weight (on a dry basis), based on the total weight of the monomers. With respect to the obtained emulsion, the solids content of the emulsion was 45.4 %, and the average particle diameter of the dispersed phase of the emulsion was 1020 Å. Using this emulsion, a paint was prepared, and the paint thus prepared was examined with respect to the initial gloss value, gloss retentivity and water resistance. Results are shown in Table 1.

Example 5

300 Parts of water, 40 parts of cyclohexyl acrylate, 15 parts of 2-hydroxycyclohexyl methacrylate, 30 parts of 2-ethylhexyl acrylate, 15 parts of acrylic acid and 20 parts of a 25 % aqueous solution of Adeca Rea soap SE-1025N (manufactured and sold by ASAHI DENKA KOGYO K.K., Japan) were charged in a reactor having a stirrer, a reflux condenser, dropping tanks and a thermometer. After elevating the temperature in the reactor to 78 °C, 0.5 part of ammonium persulfate was added to the reactor, and the resultant mixture was allowed to stand for 1 hour, thereby obtaining a preliminary aqueous acrylate polymer emulsion having a

seed latex dispersed therein. The hydrogen ion concentration of the obtained preliminary aqueous acrylate polymer emulsion was measured to give a pH value of 1.8. Then, a liquid mixture of 25 parts of dimethyl-
5 dimethoxysilane and 25 parts of methyltrimethoxysilane was dropped into the reactor from a dropping tank over 5 minutes, while maintaining the temperature in the reactor at 60 °C, and the resultant mixture was allowed to stand at 80 °C for 2 hours. Subsequently, a liquid
10 mixture of 330 parts of water, 280 parts of cyclohexyl acrylate, 120 parts of 2-ethylhexyl acrylate, 18 parts of 25 % aqueous solution of Adeka Rea soap SE-1025N, 2 parts of a 20 % aqueous solution of sodium dodecylbenzenesulfonate and 1.0 part of ammonium persulfate, and
15 2.5 parts of γ -methacryloxypropyltrimethoxysilane were individually dropped into the reactor from separate dropping tanks over 3 hours. During the dropping of the above-mentioned liquid mixtures into the reactor, the temperature in the reactor was maintained at 80 °C.
20 After completion of the dropping of the liquid mixtures into the reactor, the temperature in the reactor was elevated to 85 °C and the mixture was allowed to stand for 6 hours. After cooling the mixture in the reactor to room temperature, the hydrogen ion concentration
25 thereof was measured to give a pH value of 2.0. A 25 %

aqueous solution of ammonia was added to the mixture in the reactor to thereby adjust the pH value thereof to 8. Then, the resultant mixture was filtered by means of a 100-mesh metal wire net to thereby obtain a final aqueous, silicone-modified acrylate polymer emulsion. The amount of filtered-off aggregates was as small as 0.02 % by weight (on a dry basis), based on the total weight of the monomers. With respect to the obtained emulsion, the solids content of the emulsion was 44.0 %, and the average particle diameter of the dispersed phase of the emulsion was 1190 Å. Using this emulsion, a paint was prepared, and the paint thus prepared was examined with respect to the initial gloss value, gloss retentivity and water resistance. Results are shown in Table 1.

Examples 6 through 10

- (1) Preparation of a preliminary aqueous acrylate polymer emulsion having a seed latex dispersed therein
- 381.5 Parts of water, 40 parts of butyl acrylate, 40 parts of methyl methacrylate, 5 parts of itaconic acid, 10 parts of methacrylic acid, 5 parts of styrene and 18 parts of a 25 % aqueous solution of Aquaron HS-10 (ammonium salt of sulfuric acid ester of polyoxyethylene alkylphenyl ether, which has a double bond and is copolymerizable with an ethylenically unsaturated

monomer) (manufactured and sold by Dai-ichi Kogyo Seiyaku Co., Ltd., Japan) were charged in a reactor having a stirrer, a reflux condenser, dropping tanks and a thermometer. After elevating the temperature in the reactor to 78 °C, 0.5 part of ammonium persulfate was added to the reactor, and the resultant mixture was allowed to stand for 1 hour, thereby obtaining a preliminary aqueous acrylate polymer emulsion having a seed latex dispersed therein. The hydrogen ion concentration of the obtained preliminary aqueous acrylate polymer emulsion was measured to give a pH value of 1.7.

(2) Preparation of emulsions (a) to (e)

In each of Examples 6 through 10, a liquid mixture of a predetermined amount (indicated in Table 2) of the above-obtained preliminary aqueous acrylate polymer emulsion (having a seed latex dispersed therein), 80 parts of a 25 % aqueous solution of Aquaron HS-10 as an emulsifier, 5.0 parts of ammonium persulfate, 655 parts of water and monomers indicated in Table 2 as monomer system (A), and hydrolyzable silanes indicated in Table 2 were individually dropped into the reactor from two separate dropping tanks over 3 hours. During the dropping of the above-mentioned liquid mixtures into the reactor, the temperature in the reactor was main-

tained at 80 °C. After completion of the dropping of the liquid mixtures into the reactor, the temperature in the reactor was elevated to 85 °C and the mixture was allowed to stand for 6 hours. After cooling the mixture in the reactor to room temperature, the hydrogen ion concentration thereof in each Example was individually measured to obtain a respective pH value which was in the range of from 1.5 to 2.5. A 25 % aqueous solution of ammonia was added to the mixture in the reactor to thereby adjust the pH value thereof to 8. Then, the resultant mixture was filtered by means of a 100-mesh metal wire net to thereby obtain a final aqueous, silicone-modified acrylate polymer emulsion. With respect to each of the emulsions obtained in Examples 6 through 10, the amount of filtered-off aggregates was as small as 0.5 % by weight or less (on a dry basis), based on the total weight of the monomers. Using these emulsions, paints were prepared, respectively, and the paints thus prepared were examined with respect to the initial gloss value, gloss retentivity and water resistance. Results are shown in Table 2.

(3) Results of the examination

Emulsions (a) to (e) obtained respectively in Examples 6 to 10 exhibited excellent initial gloss

value, gloss retentivity and water resistance.

Table 1

	Examples					Comparative Examples		
	1	2	3	4	5	1	2	3
Initial gloss value (%)	81	84	82	84	80	79	65	80
Gross retentivity (%)	80	98	95	96	91	85	60	48
Water resistance	◎	◎	◎	◎	◎	X	◎	◎

Criterion for evaluation of water resistance

◎: No blistering or lowering of luster is observed.

○: Slight blistering is observed, but no lowering of luster is observed.*

△: Blistering and lowering of luster are observed.*

X: Blistering occurs on overall surface and luster is markedly lowered.

* Among the paints prepared in Examples and Comparative Examples, no paints were found which were evaluated as ○ or △.



Table 2

	Examples	6	7	8	9	10
	Emulsions	a	b	c	d	e
5	Preliminary aqueous acrylate polymer emulsion having a seed latex dispersed therein (parts by weight)	1000	1000	1000	200	200
10	[Monomers used as a monomer system (A)] (parts by weight)					
	n-butyl acrylate	390	390	390	350	
	2-ethylhexyl acrylate					350
	Methyl methacrylate	590	590	590	585	585
	Styrene				50	50
15	Methacrylic acid	20	20	20	15	15
	[Aqueous solution containing monomers used as an emulsifier (B)] (parts by weight)					
	25% aqueous solution of Aquaron HS-10	80	80	80	80	80
	[Hydrolyzable silanes used as a modifier (C)] (parts by weight)					
	γ -methacryloxypropyl-trimethoxysilane				5	5
20	Methyltriethoxysilane	100	45	45	50	50
	Dimethyldiethoxysilane		100		50	
	Octamethylcyclotetra-siloxane			200		50
	[Examination items]					
	Initial gloss value (%)	79	82	78	76	77
	Gloss retentivity (%)	80	85	85	91	76
	Water resistance	◎	◎	◎	◎	◎

INDUSTRIAL APPLICABILITY


The aqueous, silicone-modified acrylate polymer emulsion of the present invention is capable of forming such an excellent coating as have not conventionally been achieved, i.e., a coating having excellent water repellency, water resistance, weatherability, dispersion characteristics of pigment, gloss retentivity, stain resistance and adhesion properties. Therefore, the aqueous, silicone-modified acrylate polymer emulsion of the present invention can be advantageously used as a paint, an undercoating or finish coating material for building materials, an adhesive, a pressure-sensitive adhesive, a processing agent for papers, or a finish coating material for textile fabrics. Especially, the aqueous, silicone-modified acrylate polymer emulsion of the present invention can be advantageously used as a paint, or a finish coating material for building materials.





What is claimed is:

1. An aqueous, silicone-modified acrylate polymer emulsion, which is an acrylate polymer emulsion produced by subjecting a monomer system (A) to emulsion polymerization in an aqueous medium in the presence of an emulsifier (B), wherein said acrylate polymer emulsion is silicone-modified using a silicone structure-containing modifier (C) during or after said emulsion polymerization;
wherein said monomer system (A) comprises an acrylate monomer selected from the group consisting of an acrylic ester, a methacrylic ester and a mixture thereof;
wherein said emulsifier (B) is selected from the group consisting of a sulfonic acid group- or sulfonate group-containing ethylenically unsaturated monomer, a sulfate ester group-containing ethylenically unsaturated monomer and a mixture thereof; and
wherein said silicone structure-containing modifier (C) comprises a silicone structure-containing silane (I) represented by the formula:





THIS SHEET HAS BEEN
REPLACED

- 65 -

wherein R¹ represents a hydrogen atom, a C₁-C₁₆ aliphatic hydrocarbon group, a C₅-C₁₀ aryl group, a C₅-C₆ cycloalkyl group, a vinyl group, an acrylic C₁-C₁₀ alkyl group or a methacrylic C₁-C₁₀ alkyl group, and each R² independently represents a C₁-C₈ alkoxy group, an acetoxy group or a hydroxyl group.

2. The aqueous, silicone-modified acrylate polymer emulsion according to claim 1, wherein said monomer system (A) and said emulsifier (B) are, respectively, used in an amount of from 80 to 99.95 % by weight and in an amount of from 0.05 to 20 % by weight, based on the total weight of monomer system (A) and emulsifier (B), and said silicone structure-containing modifier (C) is used in an amount which satisfies the following relationships:

$$\frac{1}{2} \leq \frac{(A) + (B)}{(C)} \leq \frac{99}{1}$$

wherein (A), (B) and (C), respectively, represent amounts of monomer system (A), emulsifier (B) and modifier (C) in terms of weight percentages based on the total weight of materials (A), (B) and (C).

This Sheet Has Been Replaced





3. The aqueous, silicone-modified acrylate polymer emulsion according to claim 1 or 2, wherein the ratio of the total weight of said monomer system (A), said emulsifier (B) and said modifier (C) to the weight of
5 said aqueous medium is 75/25 or less.

4. The aqueous, silicone-modified acrylate polymer emulsion according to claim 1, wherein said monomer system (A) further comprises a comonomer copolymeriza-
10 ble with said acrylate monomer, said comonomer being at least one member selected from the group consisting of an acrylamide monomer, a methacrylamide monomer, a vinyl monomer and a carboxylic acid group-containing ethylenically unsaturated monomer, and wherein said
15 acrylate monomer and said comonomer are, respectively, present in an amount of from 90 % to less than 100 % by weight and in an amount of from 10 % by weight or less, based on the total weight of said acrylate monomer and said comonomer.

20

5. The aqueous, silicone-modified acrylate polymer emulsion according to claim 4, wherein said comonomer of said monomer system (A) is a carboxylic acid group-containing ethylenically unsaturated monomer.

25



6. The aqueous, silicone-modified acrylate polymer emulsion according to claim 5, wherein said carboxylic acid group-containing ethylenically unsaturated monomer is at least one member selected from the group consisting of acrylic acid, methacrylic acid, itaconic acid and a half ester thereof, fumaric acid and a half ester thereof, and maleic acid and a half ester thereof.

7. The aqueous, silicone-modified acrylate polymer emulsion according to claim 1, wherein said sulfonic acid group- or sulfonate group-containing ethylenically unsaturated monomer of said emulsifier (B) is a radically polymerizable double bond-containing compound having a sulfonic acid group, or an ammonium or an alkali metal salt thereof, and said sulfate ester group-containing ethylenically unsaturated monomer of said emulsifier (B) is a radically polymerizable double bond-containing compound having a sulfate ester group, or an ammonium or an alkali metal salt thereof.

20


8. The aqueous, silicone-modified acrylate polymer emulsion according to claim 7, wherein said sulfonic acid group- or sulfonate group-containing ethylenically unsaturated monomer of said emulsifier (B) is a radically polymerizable double bond-containing compound

25




having a substituent selected from the group consisting of a C₁-C₂₀ alkyl group, a C₂-C₄ alkyl ether group, a poly-C₂-C₄ alkyl ether group, a C₆ or C₁₀ aryl group, and a succinic acid group, each of which is substituted with a sulfonic acid group which is in the form of an ammonium, a sodium or a potassium salt thereof, or a vinyl sulfonate compound having a vinyl group bonded to a sulfonic acid group which is in the form of an ammonium, a sodium or a potassium salt thereof, and said sulfate ester group-containing ethylenically unsaturated monomer of said emulsifier (B) is a radically polymerizable double bond-containing compound having a substituent selected from the group consisting of a C₁-C₂₀ alkyl group, a C₂-C₄ alkyl ether group, a poly-C₂-C₄ alkyl ether group and a C₆ or C₁₀ aryl group, each of which is substituted with a sulfate ester group which is in the form of an ammonium, a sodium or a potassium salt thereof.

9. The aqueous, silicone-modified acrylate polymer emulsion according to claim 1, wherein said silicone structure-containing modifier (C) further comprises at least one member selected from the group consisting of a cyclic silane, a hydrolyzable group-containing linear siloxane and a silane (II) represented by the formula:



5 wherein each R^3 independently represents a
hydrogen atom, a C_1 - C_{16} aliphatic hydrocarbon
group, a C_5 - C_{10} aryl group, a C_5 - C_6 cycloalkyl
group, a vinyl group, an acrylic C_1 - C_{10} alkyl
group or a methacrylic C_1 - C_{10} alkyl group,
each R^4 independently represents a C_1 - C_8
10 alkoxyl group, an acetoxyl group or a hydroxyl
group, and n is 0, 2 or 3; and
wherein the molar ratio of said silane (I) to said at
least one member selected from the group consisting of
a cyclic silane, a hydrolyzable group-containing linear
15 siloxane and a silane (II) is at least 10/100.

10. The aqueous, silicone-modified acrylate polymer
emulsion according to claim 1, wherein said silicone
structure-containing modifier (C) further comprises at
20 least one member selected from the group consisting of
a cyclic silane and a silane (III) represented by the
formula:



25 wherein each R^3 independently represents a



* C L M S *

THIS SHEET HAS BEEN
REPLACED

- 70 -

hydrogen atom, a C₁-C₁₆ aliphatic hydrocarbon group, a C₅-C₁₀ aryl group, a C₅-C₆ cycloalkyl group, a vinyl group, an acrylic C₁-C₁₀ alkyl group or a methacrylic C₁-C₁₀ alkyl group, and
5 each R⁴ independently represents a C₁-C₈ alkoxy group, an acetoxyl group or a hydroxyl group; and

wherein the molar ratio of said silane (I) to said at least one member selected from the group consisting of
10 a cyclic silane and a silane (III) is at least 10/100.

11. The aqueous, silicone-modified acrylate polymer emulsion according to claim 1, wherein said acrylate monomer of said monomer system (A) contains 5 % by
15 weight or more, based on the weight of said monomer system (A), of a C₅-C₁₂ cycloalkyl ester of acrylic acid, a C₅-C₁₂ cycloalkyl ester of methacrylic acid, or a mixture thereof.

20 12. The aqueous, silicone-modified acrylate polymer emulsion according to claim 1, wherein said modifier (C) is added to a system of said emulsion polymerization, so that the silicone-modification of said emulsion is performed during said emulsion polymerization.

25

This Sheet Has Been Replaced





13. The aqueous, silicone-modified acrylate emulsion according to claim 1, wherein said monomer system (A) is comprised of monomer systems (A¹) and (A²), each comprising said acrylate monomer, and said emulsifier
5 (B) is comprised of emulsifiers (B¹) and (B²), each selected from the group consisting of said sulfonic acid group- or sulfonate group-containing ethylenically unsaturated monomer, said sulfate ester group-containing ethylenically unsaturated monomer and said mixture
10 thereof, with the proviso that monomer systems (A¹) and (A²) are the same or different, and emulsifiers (B¹) and (B²) are the same or different, and wherein said emulsion polymerization is conducted in a sequence of step (1) and step (2), wherein in step (1), said mono-
15 mer system (A¹) is subjected to emulsion polymerization in an aqueous medium in the presence of said emulsifier (B¹) to thereby obtain a preliminary aqueous acrylate polymer emulsion having a seed latex dispersed therein, and in step (2), said monomer system (A²) and said
20 emulsifier (B²), optionally with an aqueous medium, are added to said preliminary aqueous acrylate polymer emulsion to effect emulsion polymerization thereof, thereby producing a final aqueous acrylate polymer emulsion, wherein said silicone-modification is per-
25 formed using said silicone structure-containing modifi-



er (C) during or after said emulsion polymerization.

14. The aqueous, silicone-modified acrylate polymer emulsion according to claim 13, wherein said modifier (C) is added in step (2) to perform the silicone-modification during the emulsion polymerization.

15. The aqueous, silicone-modified acrylate polymer emulsion according to claim 13, wherein said final aqueous acrylate emulsion is treated with said modifier (C) to perform said silicone-modification after said emulsion polymerization.

16. The aqueous, silicone-modified acrylate polymer emulsion according to claim 13, wherein in step (1), said monomer system (A^1) and said emulsifier (B^1) are, respectively, used in an amount of from 80 to 99.95 % by weight and in an amount of from 20 to 0.05 % by weight, based on the total weight of monomer system (A^1) and emulsifier (B^1); and wherein in step (2), said monomer system (A^2) and said emulsifier (B^2) are, respectively, used in an amount of from 80 to 99.95 % by weight and in an amount of from 20 to 0.05 % by weight, based on the total weight of monomer system (A^2) and emulsifier (B^2),



wherein said silicone structure-containing modifier (C) is used in an amount which satisfies the following relationships:

5

$$\frac{1}{2} \leq \frac{(A^1) + (A^2) + (B^1) + (B^2)}{(C)} \leq \frac{99}{1}$$

10 wherein (A¹), (A²), (B¹), (B²) and (C), respectively, represent amounts of monomer system (A¹), monomer system (A²), emulsifier (B¹), emulsifier (B²) and modifier (C) in terms of weight percentages based on the total weight of materials (A¹), (A²), (B¹), (B²) and (C), and

15 wherein the ratio of the total weight of said monomer system (A¹) and emulsifier (B¹) to the total weight of said monomer system (A²) and emulsifier (B²) is from 1/99 to 99/1.

20 17. The aqueous, silicone-modified acrylate emulsion according to claim 16, wherein in step (1), said monomer system (A¹) contains 0.5 to 30 % by weight of a carboxylic acid group-containing ethylenically unsaturated monomer, based on the weight of said monomer
25 system (A¹).



18. The aqueous, silicone-modified acrylate emulsion
according to any one of claims 1 to 17, which is a
paint, an undercoating or finish coating material for
5 building materials, an adhesive, a pressure-sensitive
adhesive, a processing agent for papers, or a finish
coating material for textile fabrics.

19. The aqueous, silicone-modified acrylate emulsion
10 according to claim 18, which is a paint, or a finish
coating material for building materials.

15

20

25

ABSTRACT OF THE DISCLOSURE

TITLE OF INVENTION: AQUEOUS, SILICONE-MODIFIED ACRYLATE
POLYMER EMULSION

Disclosed is an aqueous, silicone-modified acrylate polymer emulsion, which is an acrylate polymer emulsion produced by subjecting a monomer system (A) comprising an acrylate monomer selected from the group consisting of an acrylic ester, a methacrylic ester and a mixture thereof to emulsion polymerization in an aqueous medium in the presence of an emulsifier (B) selected from the group consisting of a sulfonic acid group- or sulfonate group-containing ethylenically unsaturated monomer, a sulfate ester group-containing ethylenically unsaturated monomer and a mixture thereof, wherein the acrylate polymer emulsion is silicone-modified using a specific, silicone structure-containing modifier (C) during or after the emulsion polymerization. The aqueous, silicone-modified acrylate polymer emulsion of the present invention is capable of forming a coating having excellent water repellency, water resistance, weatherability, dispersion characteristics of pigment, gloss retentivity, stain resistance and adhesion properties, and therefore can be advantageously used as a paint, an undercoating or finish coating material for building materials, an adhesive, a pressure-sensitive adhesive, a processing agent for papers, or a finish coating material for textile fabrics, especially as a paint, or a finish coating material for building materials.


This Sheet Has Been Replaced



acrylic ester, a methacrylic ester and a mixture thereof;

wherein the emulsifier (B) is selected from the group consisting of a sulfonic acid group- or sulfonate group-containing ethylenically unsaturated monomer, a sulfate ester group-containing ethylenically unsaturated monomer and a mixture thereof; and

wherein the silicone structure-containing modifier (C) comprises a silicone structure-containing silane (I) represented by the formula:




wherein R^1 represents a hydrogen atom, a C_1 - C_{16} aliphatic hydrocarbon group, a C_5 - C_{10} aryl group, a C_5 - C_6 cycloalkyl group, a vinyl group, an acrylic C_1 - C_{10} alkyl group or a methacrylic C_1 - C_{10} alkyl group, and each R^2 independently represents a C_1 - C_8 alkoxy group, an acetoxy group or a hydroxyl group.

In the aqueous, silicone-modified acrylate polymer emulsion of the present invention, it is preferred that the monomer system (A) and the emulsifier (B) be, respectively, used in an amount of from 80 to 99.95 %

sents a C₁-C₈ alkoxyl group, an acetoxyl group or a hydroxyl group, and n is 0, 2 or 3.

5 The molar ratio of the silane (I) to at least one member selected from the group consisting of a cyclic silane, a hydrolyzable group-containing linear siloxane and a silane (II) may be at least 10/100, preferably 35/100 or more.

10 In the present invention, the silicone structure-containing modifier (C) may further comprise at least one member selected from the group consisting of a cyclic silane and a silane (III) represented by the formula:



wherein each R³ independently represents a hydrogen atom, a C₁-C₁₆ aliphatic hydrocarbon group, a C₅-C₁₀ aryl group, a C₅-C₆ cycloalkyl group, a vinyl group, an acrylic C₁-C₁₀ alkyl group or a methacrylic C₁-C₁₀ alkyl group, and each R⁴ independently represents a C₁-C₈ alkoxyl group, an acetoxyl group or a hydroxyl group.

25 The molar ratio of the silane (I) to at least one

member selected from the group consisting of a cyclic silane and a silane (III) may be at least 10/100, preferably 35/100 or more.

5 In formulae (II) and (III) above, it is especially preferred that each R^3 independently represent a methyl group or a phenyl group, and each R^4 independently represent a methoxy~~l~~ group, an ethoxy~~l~~ group, a propoxy~~l~~ group, a butoxy~~l~~ group, a methoxyethoxy~~l~~ group or a hydroxyl group.


10 With respect to the modifier (C), it is especially preferred that the modifier (C) further comprise at least one member selected from the group consisting of a cyclic silane and silane (III) represented by formula (III). By the use of silane (III) or a cyclic silane
15 in combination with silane (I), it becomes possible to lower the cross-linking density of a silicone polymer formed from modifier (C), thereby preventing the silicone polymer from having a complicated structure, so that a coating obtained from the emulsion can be im-
20 parted with a softness.

Specific examples of silanes of formula (II), exclusive of those which are represented by formula (III), include phenyltrimethoxysilane, trimethylmethoxysilane and tetraethoxysilane.


25 Examples of hydrolyzable group-containing linear

siloxanes include compounds represented by a formula selected from the following formulae (IV), (V) and (VI):


5

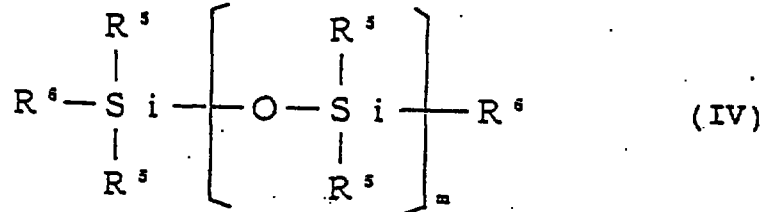

10

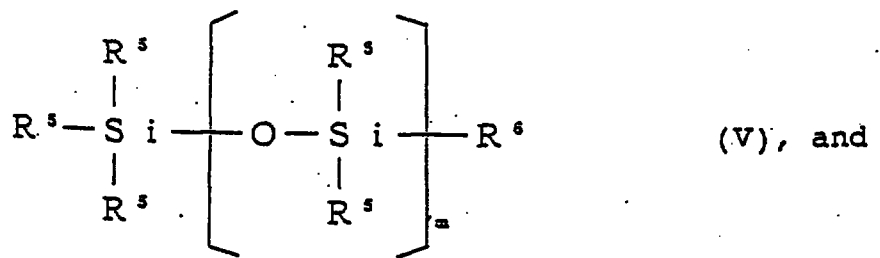

15

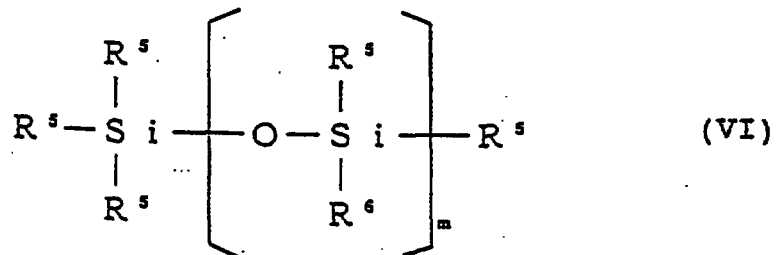

20

wherein each R^5 independently represents a hydrogen atom, a C_1 - C_{16} aliphatic hydrocarbon group, a C_5 - C_{10} aryl group, a C_5 or C_6 cycloalkyl group, a vinyl group, an acrylic C_1 - C_{10} alkyl group or a methacrylic C_1 - C_{10} alkyl group; each R^6 independently represents a C_1 - C_8 alkoxy group, an acetoxy

25

REPLACEMENT SHEET

Date 2.8 JAN 1997.....

- 34 -

Substitute sheet - 27/1/97

65/35.

In practicing the emulsion polymerization, a compound, which is decomposable by heat or a reducing agent to generate radicals and thereby initiate an addition polymerization reaction of the ethylenically unsaturated monomer, can be advantageously employed as a radical polymerization catalyst. Examples of such compounds include a water-soluble or oil-soluble persulfates, peroxides, and azobis compounds. Specific examples of such compounds include potassium persulfate, sodium persulfate, ammonium persulfate, hydrogen peroxide, t-butyl hydroperoxide, t-butyl peroxybenzoate, 2,2-azobisisobutyronitrile, 2,2-azobis(2-diaminopropane)hydrochloride and 2,2-azobis(2,4-dimethylvaleronitrile). Of these, especially preferred is potassium persulfate, sodium persulfate and ammonium persulfate, which are effective also as a catalyst to facilitate the hydrolysis ~~hydrolyzation~~ reaction and condensation reaction of the hydrolyzable silane. The radical polymerization catalyst is generally used in an amount of from 0.1 to 1 % by weight, based on the weight of the ethylenically unsaturated monomer.

Generally, it is preferred that emulsion polymerization be conducted at a temperature of from 65 to 90 °C under atmospheric pressure. However, the emul-

REPLACEMENT SHEET

Date 28 JAN 1997

- 35 -

Substitute sheet - 27/1/97

sion polymerization can be conducted under high pressure, so as to, for example, prevent the monomers from being vaporized at the polymerization temperature. The polymerization time comprises an introduction time and


5 a maturation (cooking) time. With respect to the introduction time, when each of the materials is introduced to a reaction system at a time, the introduction time is generally several minutes. When the raw materials are stepwise introduced to a reaction system, the

10 introduction of the raw materials is conducted in a manner such that the heat generated in the polymerization reaction can be removed. Therefore, in this case, the introduction time may vary, depending on the desired content of the polymer in a final emulsion.

15 However, the introduction time is generally 10 minutes or more. With respect to the maturation (cooking) time, it is preferred that the maturation time be 10 minutes or more. When the polymerization time is shorter than the period of time as mentioned above,

20 there is a danger that not only ^{do}~~does~~ the raw materials remain unreacted, but also the hydrolyzable silanes are not condensed and remain as they are. When it is desired to increase the rate of polymerization or when it is desired to perform a polymerization reaction at a

25 temperature as low as 70 °C or less, it is advantageous




Substitute sheet - 27/1/97

acrylate polymer emulsion. The amount of filtered-off aggregates was as small as 0.02 % by weight (on a dry basis), based on the total weight of the monomers. With respect to the obtained emulsion, the solids
5 content of the emulsion was 44.0 %, and the average particle diameter of the dispersed ^{phrase} ~~phase~~ of the emul-
sion was 970 Å. Using this emulsion, a paint was prepared, and the paint thus prepared was examined with respect to the initial gloss value, gloss retentivity
10 and water resistance. Results are shown in Table 1.

Example 4

400 Parts of water, 122 parts of n-butyl methacrylate, 60 parts of methyl methacrylate, 18 parts of methacrylic acid and 30 parts of a 20 % aqueous solu-
15 tion of Latemul S-180A were charged in a reactor having a stirrer, a reflux condenser, dropping tanks and a thermometer. After elevating the temperature in the reactor to 78 °C, 1.0 part of ammonium persulfate was added to the reactor, and the resultant mixture was
20 allowed to stand for 1 hour, thereby obtaining a preliminary aqueous acrylate polymer emulsion having a seed latex dispersed therein. The hydrogen ion concentration of the obtained preliminary aqueous acrylate polymer emulsion was measured to give a pH value of
25 1.7. Then, a liquid mixture of 50 parts of dimethyl-

This Sheet Has Been Replaced



REPLACEMENT SHEET

Date: 28 JAN 1997

Substitute sheet - 27/1/97

- 61 -

value, gloss retentivity and water resistance.

Table 1

	Examples					Comparative Examples		
	1	2	3	4	5	1	2	3
Initial gloss value (%)	81	84	82	84	80	79	65	80
Gloss retentivity (%)	80	98	95	96	91	85	60	48
Water resistance	⊙	⊙	⊙	⊙	⊙	X	⊙	⊙

Criterion for evaluation of water resistance

- ⊙: No blistering or lowering of luster is observed.
- : Slight blistering is observed, but no lowering of luster is observed.*
- △: Blistering and lowering of luster are observed.*
- ×: Blistering occurs on overall surface and luster is markedly lowered.

* Among the paints prepared in Examples and Comparative Examples, no paints were found which were evaluated as ○ or △.

INDUSTRIAL APPLICABILITY

The aqueous, silicone-modified acrylate polymer emulsion of the present invention is capable of forming such an excellent coating as ^{has} ~~have~~ not conventionally been achieved, i.e., a coating having excellent water repellency, water resistance, weatherability, dispersion characteristics of pigment, gloss retentivity, stain resistance and adhesion properties. Therefore, the aqueous, silicone-modified acrylate polymer emulsion of the present invention can be advantageously used as a paint, an undercoating or finish coating material for building materials, an adhesive, a pressure-sensitive adhesive, a processing agent for papers, or a finish coating material for textile fabrics. Especially, the aqueous, silicone-modified acrylate polymer emulsion of the present invention can be advantageously used as a paint, or a finish coating material for building materials.

wherein R^1 represents a hydrogen atom, a C_1-C_{16} aliphatic hydrocarbon group, a C_5-C_{10} aryl group, a C_5-C_6 cycloalkyl group, a vinyl group, an acrylic C_1-C_{10} alkyl group or a methacrylic C_1-C_{10} alkyl group, and each R^2 independently represents a C_1-C_8 alkoxy group, an acetoxy group or a hydroxyl group.

2. The aqueous, silicone-modified acrylate polymer emulsion according to claim 1, wherein said monomer system (A) and said emulsifier (B) are, respectively, used in an amount of from 80 to 99.95 % by weight and in an amount of from 0.05 to 20 % by weight, based on the total weight of monomer system (A) and emulsifier (B), and said silicone structure-containing modifier (C) is used in an amount which satisfies the following relationships:

$$\frac{1}{2} \leq \frac{(A) + (B)}{(C)} \leq \frac{99}{1}$$

wherein (A), (B) and (C), respectively, represent amounts of monomer system (A), emulsifier (B) and modifier (C) in terms of weight percentages based on the total weight of materials (A), (B) and (C).

hydrogen atom, a C₁-C₁₆ aliphatic hydrocarbon group, a C₅-C₁₀ aryl group, a C₅-C₆ cycloalkyl group, a vinyl group, an acrylic C₁-C₁₀ alkyl group or a methacrylic C₁-C₁₀ alkyl group, and
5 each R⁴ independently represents a C₁-C₈ alkoxy group, an acetoxy group or a hydroxyl group; and

wherein the molar ratio of said silane (I) to said at least one member selected from the group consisting of
10 a cyclic silane and a silane (III) is at least 10/100.

11. The aqueous, silicone-modified acrylate polymer emulsion according to claim 1, wherein said acrylate monomer of said monomer system (A) contains 5 % by
15 weight or more, based on the weight of said monomer system (A), of a C₅-C₁₂ cycloalkyl ester of acrylic acid, a C₅-C₁₂ cycloalkyl ester of methacrylic acid, or a mixture thereof.

20 12. The aqueous, silicone-modified acrylate polymer emulsion according to claim 1, wherein said modifier (C) is added to a system of said emulsion polymerization, so that the silicone-modification of said emulsion is performed during said emulsion polymerization.

25

acrylate polymer emulsion. The amount of filtered-off aggregates was as small as 0.02 % by weight (on a dry basis), based on the total weight of the monomers.

With respect to the obtained emulsion, the solids

5 content of the emulsion was 44.0 %, and the average
particle diameter of the dispersed phase of the emul-
sion was 970 Å. Using this emulsion, a paint was
prepared, and the paint thus prepared was examined with
respect to the initial gloss value, gloss retentivity
10 and water resistance. Results are shown in Table 1.

Example 4

400 Parts of water, 122 parts of n-butyl methacry-
late, 60 parts of methyl methacrylate, 18 parts of
methacrylic acid and 30 parts of a 20 % aqueous solu-
15 tion of Latemul S-180A were charged in a reactor having
a stirrer, a reflux condenser, dropping tanks and a
thermometer. After elevating the temperature in the
reactor to 78 °C, 1.0 part of ammonium persulfate was
added to the reactor, and the resultant mixture was
20 allowed to stand for 1 hour, thereby obtaining a pre-
liminary aqueous acrylate polymer emulsion having a
seed latex dispersed therein. The hydrogen ion concen-
tration of the obtained preliminary aqueous acrylate
polymer emulsion was measured to give a pH value of
25 1.7. Then, a liquid mixture of 50 parts of dimethyl-