

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 February 2001 (22.02.2001)

PCT

(10) International Publication Number
WO 01/13587 A2

(51) International Patent Classification⁷: H04L 12/56

(21) International Application Number: PCT/EP00/07556

(22) International Filing Date: 3 August 2000 (03.08.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
99116214.0 17 August 1999 (17.08.1999) EP

(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).

(72) Inventor: LUDWIG, Reiner; c/o Helga Hoeppner, Im Levert 14, 52355 Düren (DE).

(74) Agents: VON FISCHERN, Bernhard et al.; Hoffmann . Eitle, Arabellastrasse 4, 81925 Munich (DE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— Without international search report and to be republished upon receipt of that report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND DEVICE FOR DETERMINING A TIME-PARAMETER

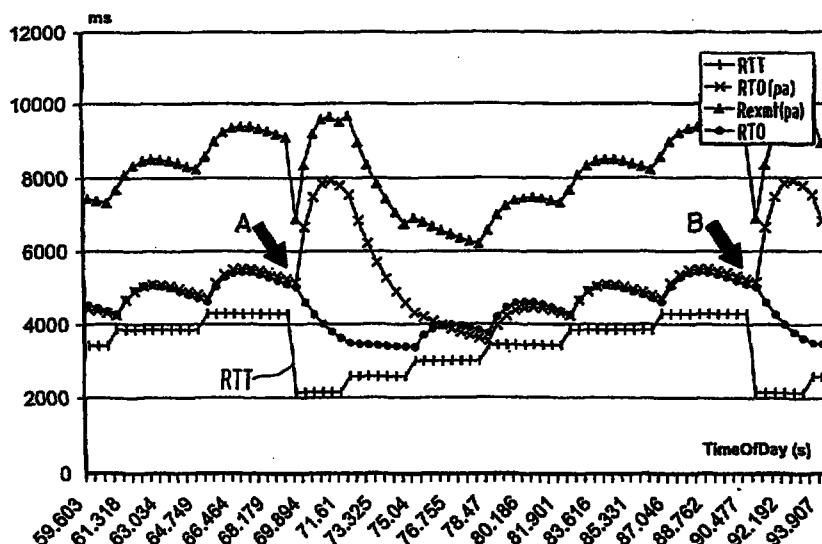

(57) Abstract: A method and device for determining a parameter (RTO) associated with a retransmission time-out feature in a data unit transmitter implementing a protocol (TCP) that provides an acknowledgment feature and a retransmission time-out feature, where according to one aspect decreasing values of the round trip time (RTT) are treated differently with respect to their influence on a mean deviation parameter (RTTVAR) than increasing values of the round trip time, where according to another aspect weight values (g, h, w) used in the determination of the parameter (RTO) are chosen such that at least one of them is time variable, and where according to a further aspect the parameter (RTO) is also calculated on the basis of a value (SR) indicative of the number of spurious time-outs in the communication.

WO 01/13587 A2