

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 November 2003 (20.11.2003)

PCT

(10) International Publication Number
WO 03/095925 A1

(51) International Patent Classification⁷: **F28F 9/26**,
F24F 11/06

(21) International Application Number: PCT/IB03/01767

(22) International Filing Date: 7 May 2003 (07.05.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PS 2297 10 May 2002 (10.05.2002) AU
2002951885 8 October 2002 (08.10.2002) AU

(71) Applicant and

(72) Inventor: **VICZENA, George, Sandor** [AU/MY]; Unit
3 A-E, Marina Bay Condo, Admiral Cove, Batu 5 Jalan
Pantai, 71050 Port Dickson, Negeri Sembilan (MY).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SG, SK,
SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CONTROL OF AIR CONDITIONING COOLING OR HEATING COIL

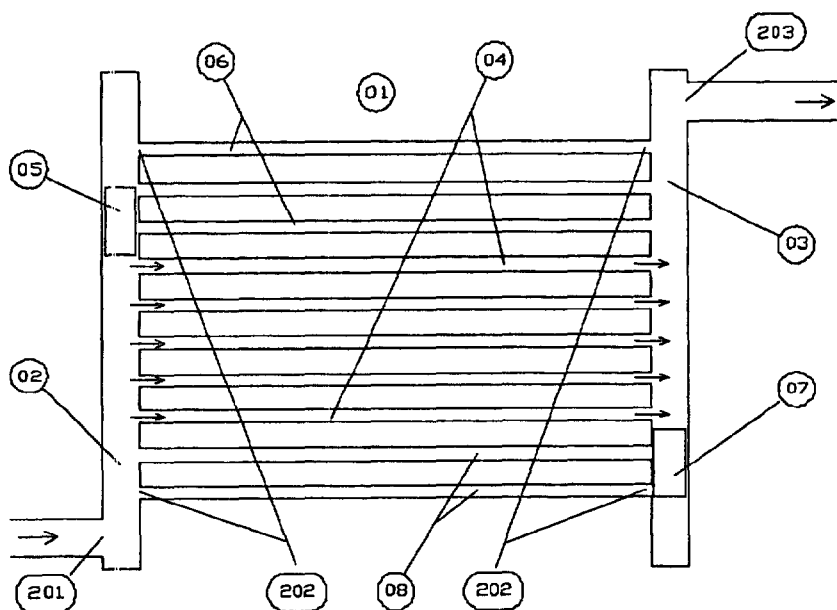

(57) Abstract: A fluid heat exchange device, comprising a header and a plurality of interconnecting circuits between an supply port and a return port, the interconnecting circuits being connected to the header by a corresponding plurality of connection ports at different locations along the header wherein the header includes a blocking control element inside the header, the blocking control element being positionally adjustable along the header to selectively block fluid flow from the supply port through the connection ports of the plurality of interconnecting circuits, thereby selectively controlling those interconnecting circuits of the plurality of interconnecting circuits which are subjected to fluid flow therethrough in dependency on the position of the blocking control element.



WO 03/095925 A1