

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 March 2004 (04.03.2004)


PCT

(10) International Publication Number
WO 2004/018825 A2

- (51) International Patent Classification⁷: **E21B**
- (21) International Application Number:
PCT/US2003/026365
- (22) International Filing Date: 22 August 2003 (22.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/405,683 23 August 2002 (23.08.2002) US
Not furnished 22 August 2003 (22.08.2003) US
- (71) Applicant: **DRIL-QUIP, INC.** [US/US]; 13550 Hempstead Hwy., Houston, TX 77040 (US).
- (72) Inventors: **MILBERGER, Lionel, J.**; 8911 Rock Lane, Houston, TX 77077 (US). **MCCANNA, Jason, C.**; * (US).
- (74) Agent: **HELMREICH, Loren, G.**; Browning Bushman P.C., 5718 Westheimer, Suite 1800, Houston, TX 77057 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: RISER CONNECTOR

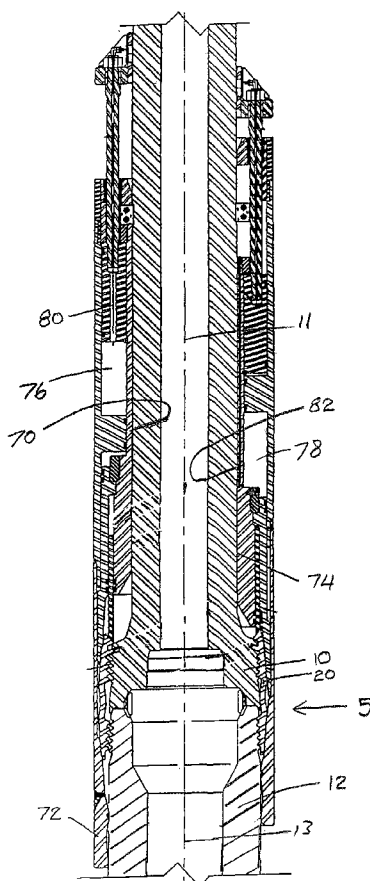

(57) Abstract: A tubular connection (7) is provided for connecting an upper tubular member (10) with a lower tubular member (12). A radially movable latch body (20) is positioned outward of the tubular members. Outer load flanks (25) on the latch body are slidably engageable with inner load flanks (24) on the tubular members. A radially projecting member (32) and a corresponding guide recess (34) are provided for guiding the latch body with respect to one of the tubular members. A safety actuator (30) and corresponding mating surface (38) may also be provided for urging the latch body outward.

WO 2004/018825 A2



Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.