

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
13 June 2019 (13.06.2019)



(10) International Publication Number
WO 2019/111032 A1

(51) International Patent Classification:
A62C 3/06 (2006.01) A62C 35/02 (2006.01)

(21) International Application Number:
PCT/IB2017/057612

(22) International Filing Date:
04 December 2017 (04.12.2017)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: **SWISS FIRE PROTECTION RESEARCH
& DEVELOPMENT AG** [CH/CH]; Kernserstrasse 17,
6060 Sarnen (CH).


(72) Inventors: **LOVAS, László**; Virágos u. 3., 2132 Göd (HU).
PELLER, Andras Tibor; Apt. 47, Bldg 2460, Road 5718,
Amwaj Islands (BH).

(74) Agent: **KATZAROV SA**; Geneva Business Center, 12 Avenue des Morgines, 1213 Petit-Lancy (CH).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

(54) Title: INSTALLED FIRE EXTINGUISHING APPARATUS, ESPECIALLY FOR THE FIRE PROTECTION OF USE LOCATIONS COMPRISING ENDANGERED STRUCTURES SEPARATED FROM EACH OTHER BY SPACES

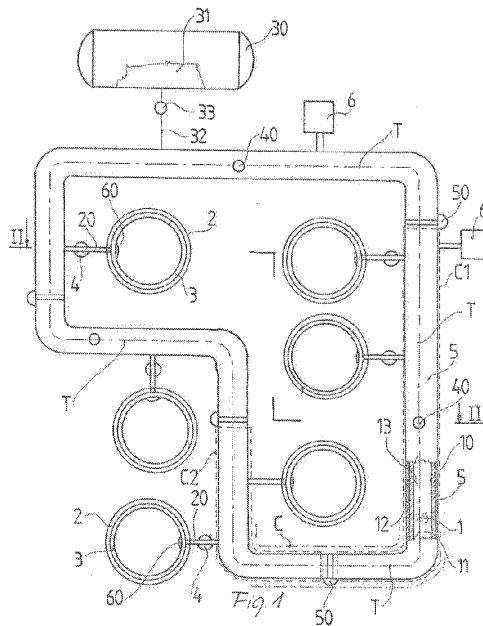

(57) Abstract: The invention relates to an installed fire extinguishing apparatus, which has a pressure-resistant storage body (10) with an internal space (11) for accommodating the fire extinguishing material composition (1) transportable in a pipeline, at least one dispersion device (3), and at least one transport pipeline (20) which is suitable for transporting the fire extinguishing material composition (1) from the internal space (11) of the storage body (10) to the dispersion device (3) arranged at the use location (2), where the storage body (10) is formed by a long pipeline (C) or a pipeline (C) that returns on itself that has a straight line main axis (T) or a main axis (T) of another shape, a trigger part-unit (4) is installed in the transport pipeline (20), and the storage body (10) is connected to a filling fitting (6) serving for filling the fire extinguishing material composition (1) or the components of the fire extinguishing material composition (1) into the internal space (11) of the storage body (10), the storage body (10) is coupled with at least one gas vessel (30), the internal space (31) of the gas vessel (30) is connected to the internal space (11) of the storage body (10) with a connection line (32) that permits the flow of medium, the gas vessel (30) and/or the storage body (10) and/or the connection line (32) has a valve (33) that influences the flow of medium between the gas vessel (30) and the storage body (10). The characteristic feature of the invention is that when the fire extinguishing apparatus is in a condition ready for use, more than 94% of the internal space (11) of the storage body (10) is filled with fire extinguishing material composition (1), where the composition (1) has a liquid and a gaseous component, and at least a part of the

WO 2019/111032 A1

[Continued on next page]

TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

external surface (12) of the storage body (10) is surrounded by a material that reduces temperature fluctuations(5).