



(51) International Patent Classification:
A62C 37/11 (2006.01)

(21) International Application Number:

PCT/US2012/044147

(22) International Filing Date:

26 June 2012 (26.06.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/206,969 10 August 2011 (10.08.2011) US

(71) Applicant (for all designated States except US):
VICTAULIC COMPANY [US/US]; 4901 Kesslersville
Road, Easton, PA 18040 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SZENTIMREY,
Rudolph** [US/US]; 5777 Sullivan Trail, Nazareth, PA
18064 (US). **STEMPO, John, M.** [US/US]; 1447 Kaywin

Avenue, Bethlehem, PA 18018 (US). **MCWHIRTER,
Eric** [US/US]; RR4 Box 4962, Kunkletown, PA 18058
(US).


(74) Agents: **CHIONCHIO, John, A.** et al.; Ballard Spahr
LLP, 999 Peachtree Street, Suite 1000, Atlanta, GA 30309-
3915 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,

[Continued on next page]

(54) Title: SPRINKLER SYSTEM AND INSTALLATION

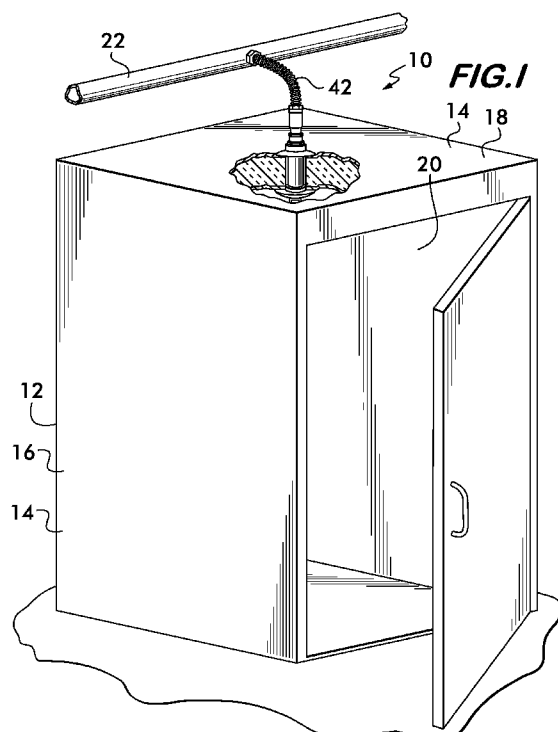

(57) Abstract: A sprinkler system installation for fire sup-
pression within a cold environment uses a dry sprinkler as-
sembly connected to a piping network by a flexible hose and
supported in a substrate of a structure separating the cold en-
vironment from a temperature controlled warm environment.
Sleeves of insulating material surround a conduit of the as-
sembly and engage both the conduit and the substrate to seal
and provide support. Escutcheons are also provided on op-
posite sides of the substrate which effect a clamping action
on the assembly.



UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*