

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
1 November 2007 (01.11.2007)

PCT

(10) International Publication Number  
**WO 2007/123428 A1**

(51) International Patent Classification:

*B29C 45/20* (2006.01)      *B29C 45/22* (2006.01)  
*B29C 45/23* (2006.01)      *B29C 45/74* (2006.01)  
*B29C 45/78* (2006.01)

(21) International Application Number:

PCT/NZ2007/000094

(22) International Filing Date: 24 April 2007 (24.04.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

546761      24 April 2006 (24.04.2006)      NZ

(71) Applicant (for all designated States except US): **VOLASTIC LIMITED** [NZ/NZ]; 3/20 Hamilton Road, Ponsonby, Auckland, 1011 (NZ).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **FILL, Robert John** [NZ/NZ]; 51 Clifton Road, Herne Bay, Auckland, 1011 (NZ).


(74) Agent: **BALDWIN**; P O Box 5999, Wellesley Street, Auckland, 1141 (NZ).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: INJECTION MOULDING NOZZLE AND TIP THEREFOR

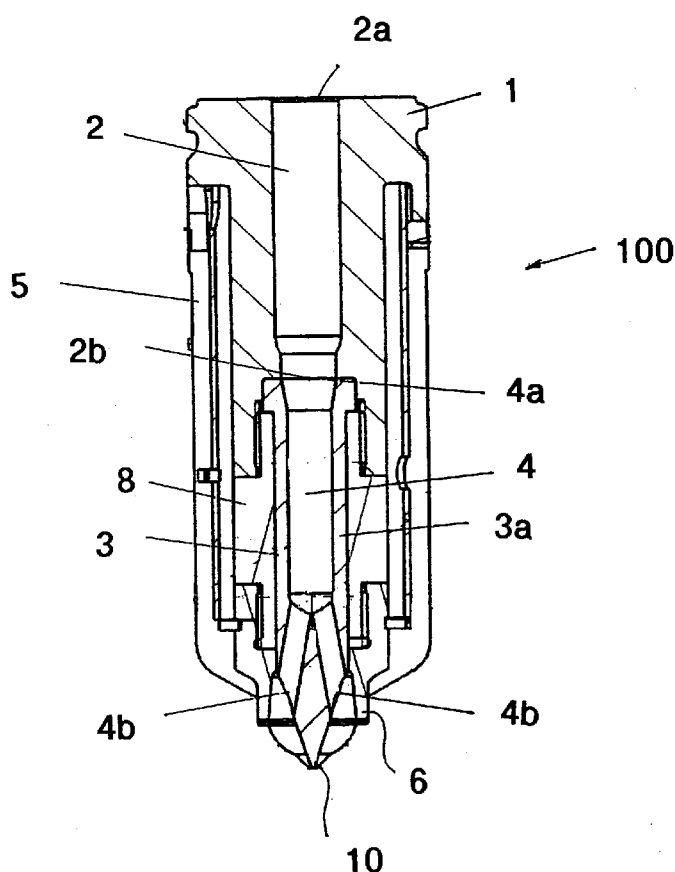

(57) Abstract: An injection moulding tip (3) for an injection moulding nozzle assembly (100) has an inlet (4a) at a first end, at least one outlet (4b) at a second end and a flow path (4) between the inlet (4a) and the outlet (4b). A first portion (26) of the tip (3) adjacent the first end has a first diameter, a second portion (31) adjacent the second end has a second diameter, and a central portion (29) between the first and second portions has a diameter that is greater than the first and second diameters. An injection moulding tip is also disclosed.



**Published:**

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*