

- 2 DEC 2003

1 / 6

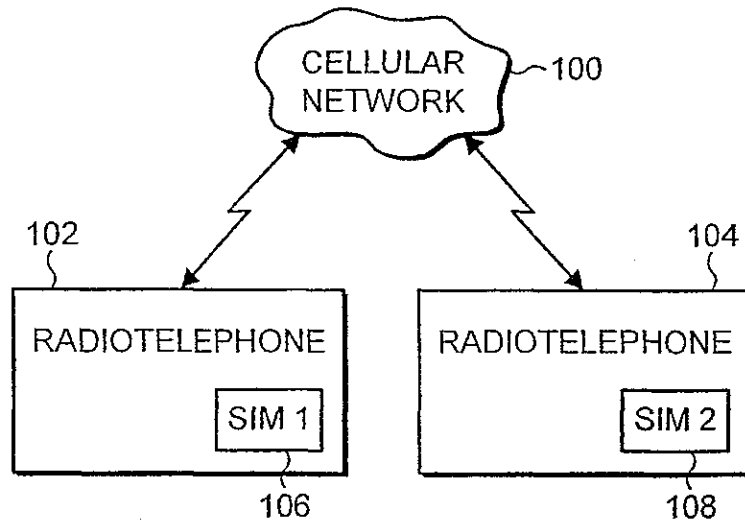


FIG. 1
PRIOR ART

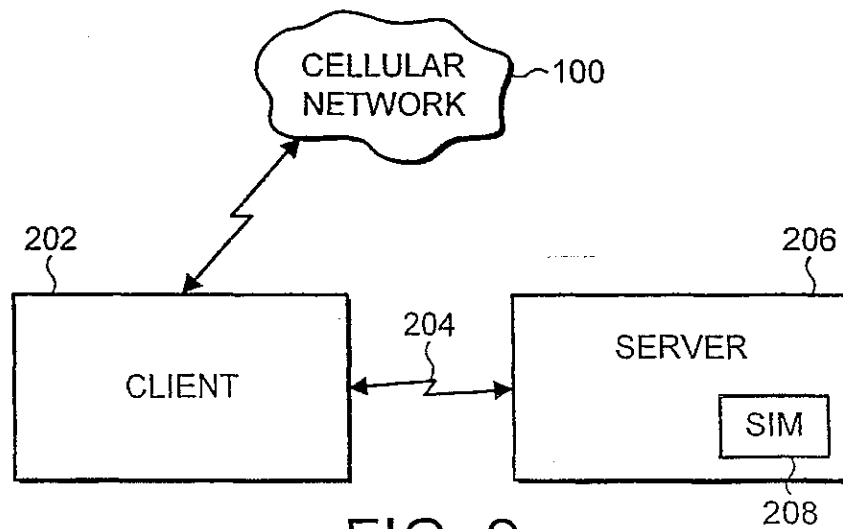


FIG. 2

- 2 DEC 2003

2 / 6

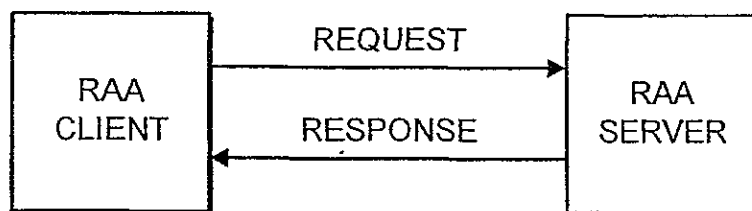


FIG. 3

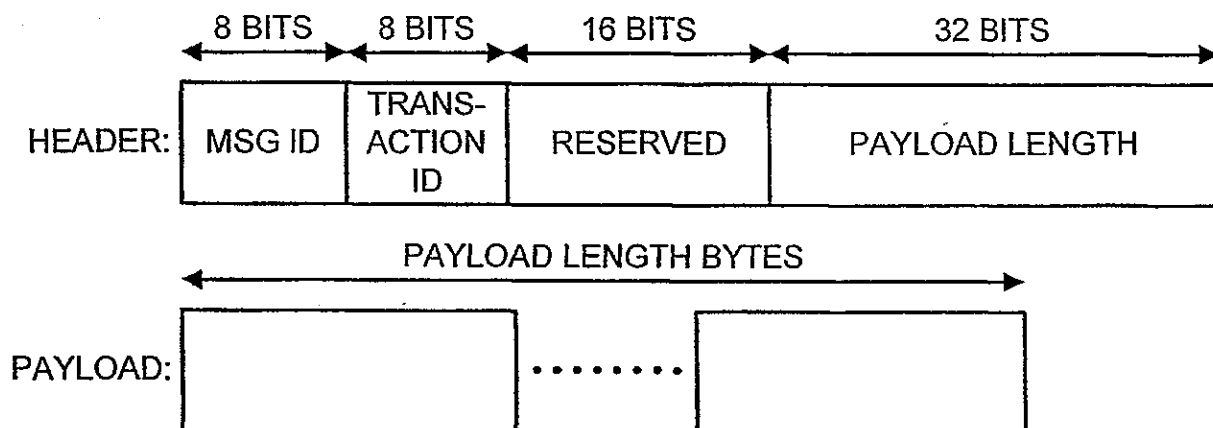


FIG. 4


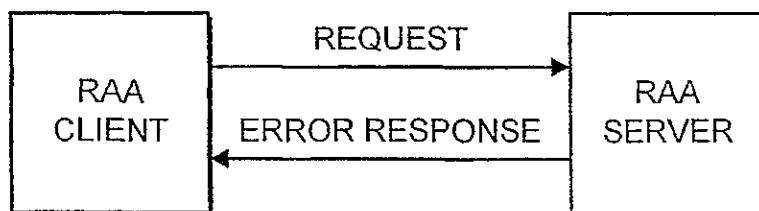


FIG. 5

- 2 DEC 2003


3 / 6

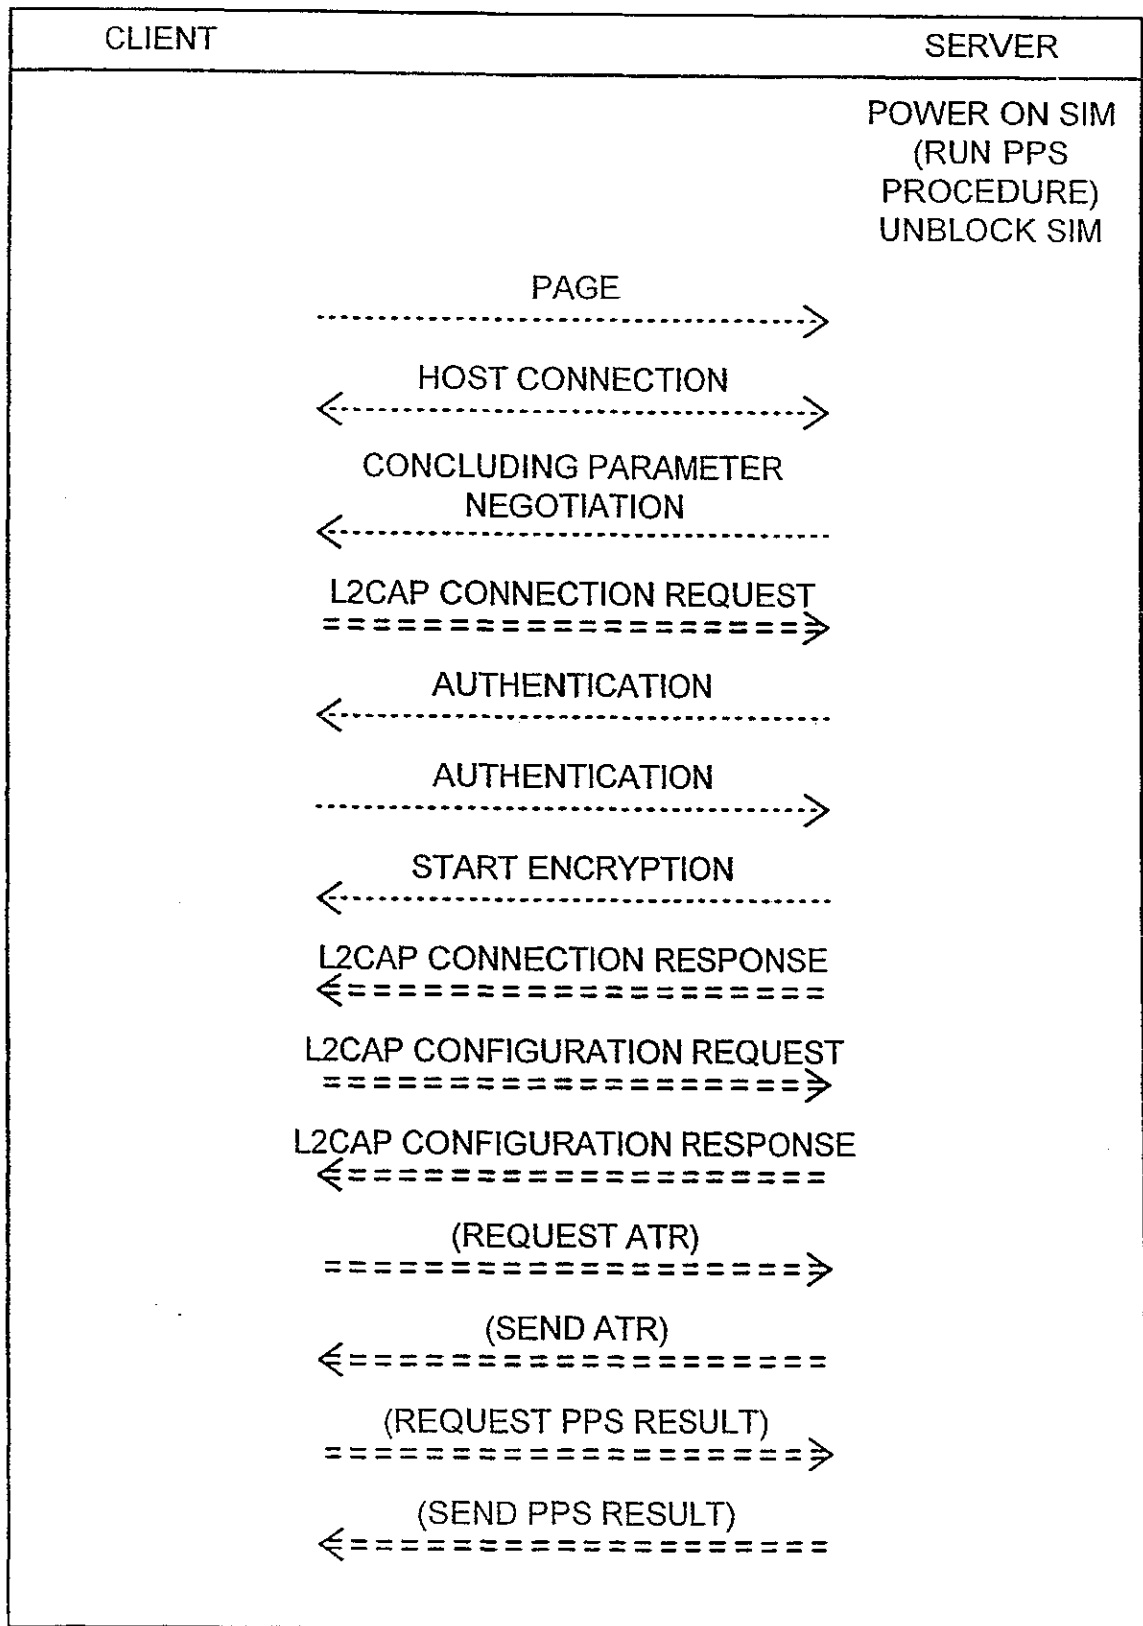

SIGNALLING DIAGRAM FOR A CLIENT CONNECTING TO A SERVER


FIG. 6

4 / 6

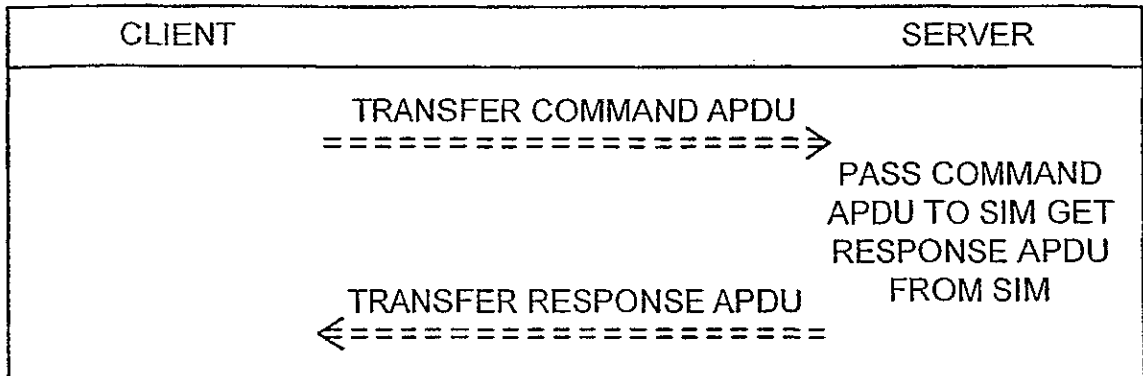


APDU TRANSFER BETWEEN CLIENT AND SERVER

FIG. 7

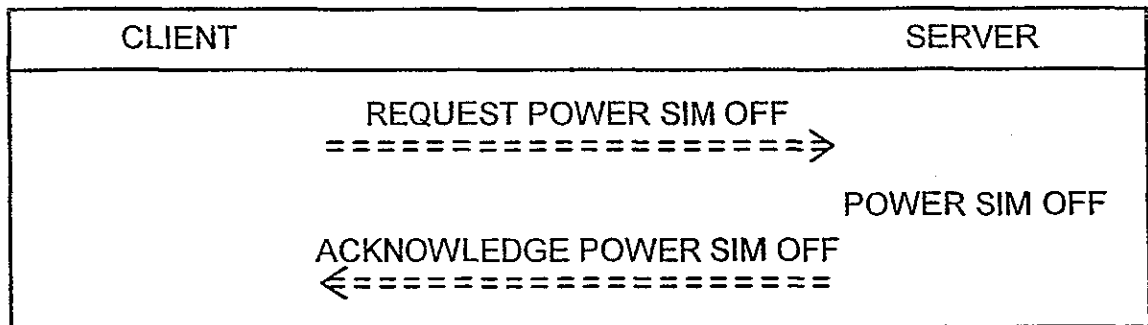

POWER SIM OFF


FIG. 8

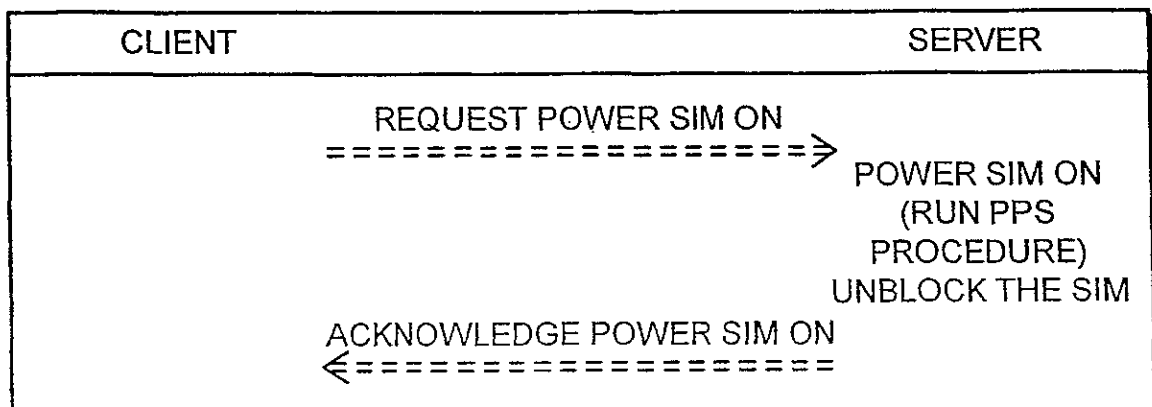

POWER SIM ON


FIG. 9

5 / 6

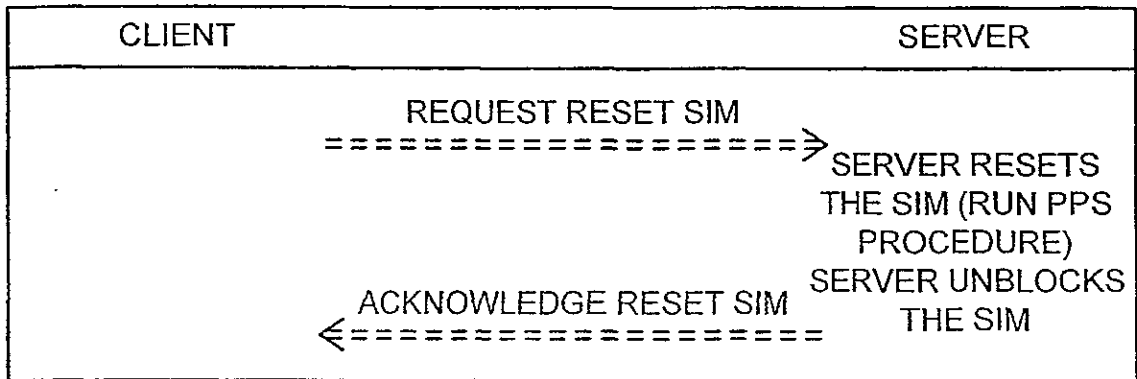


CLIENT REQUESTS SERVER TO RESET THE SIM

FIG. 10

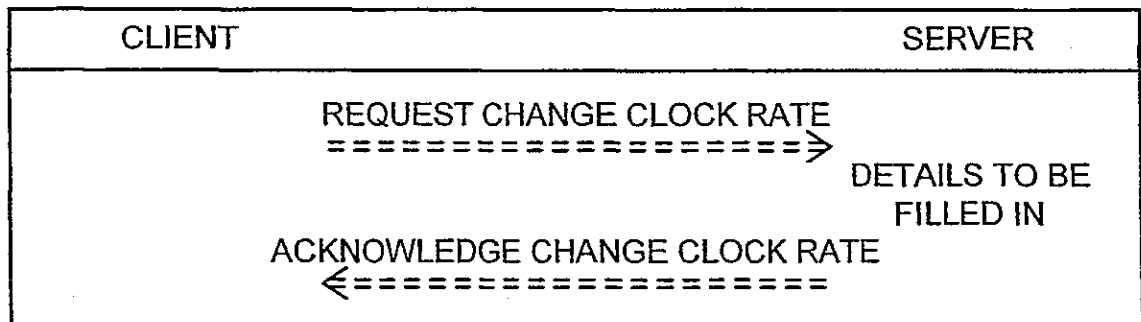

CLIENT REQUESTING SERVER TO CHANGE SIM CLOCK RATE


FIG. 11

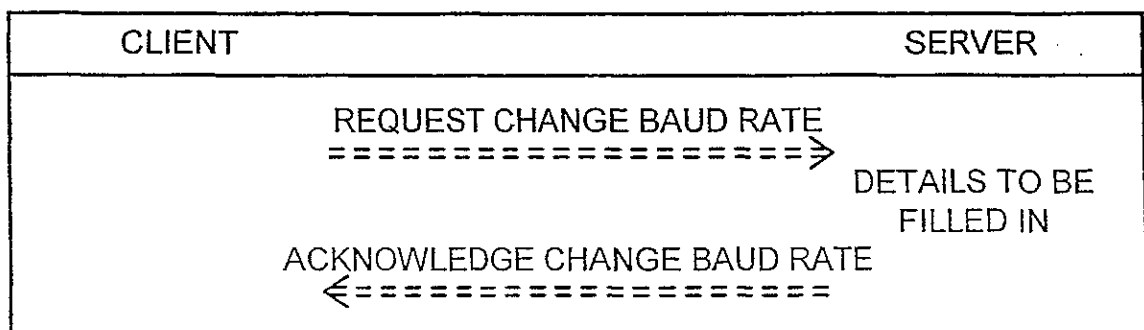

CLIENT REQUESTING SERVER TO CHANGE SIM BAUD RATE

FIG. 12

6 / 6

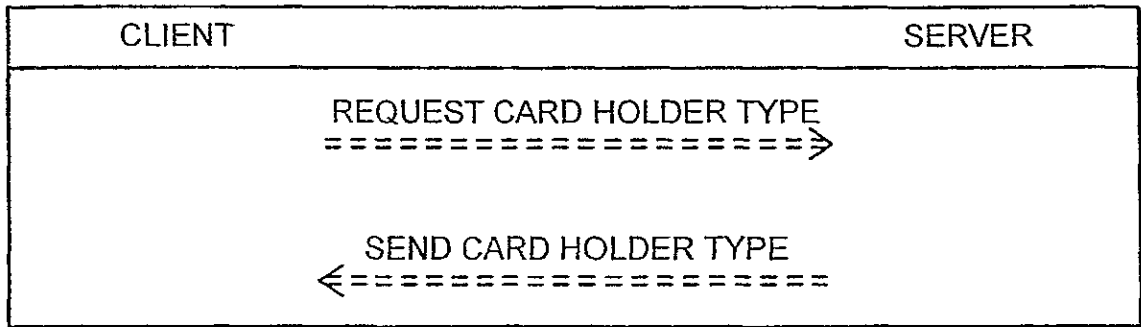

REQUEST CARD HOLDER TYPE

FIG. 13

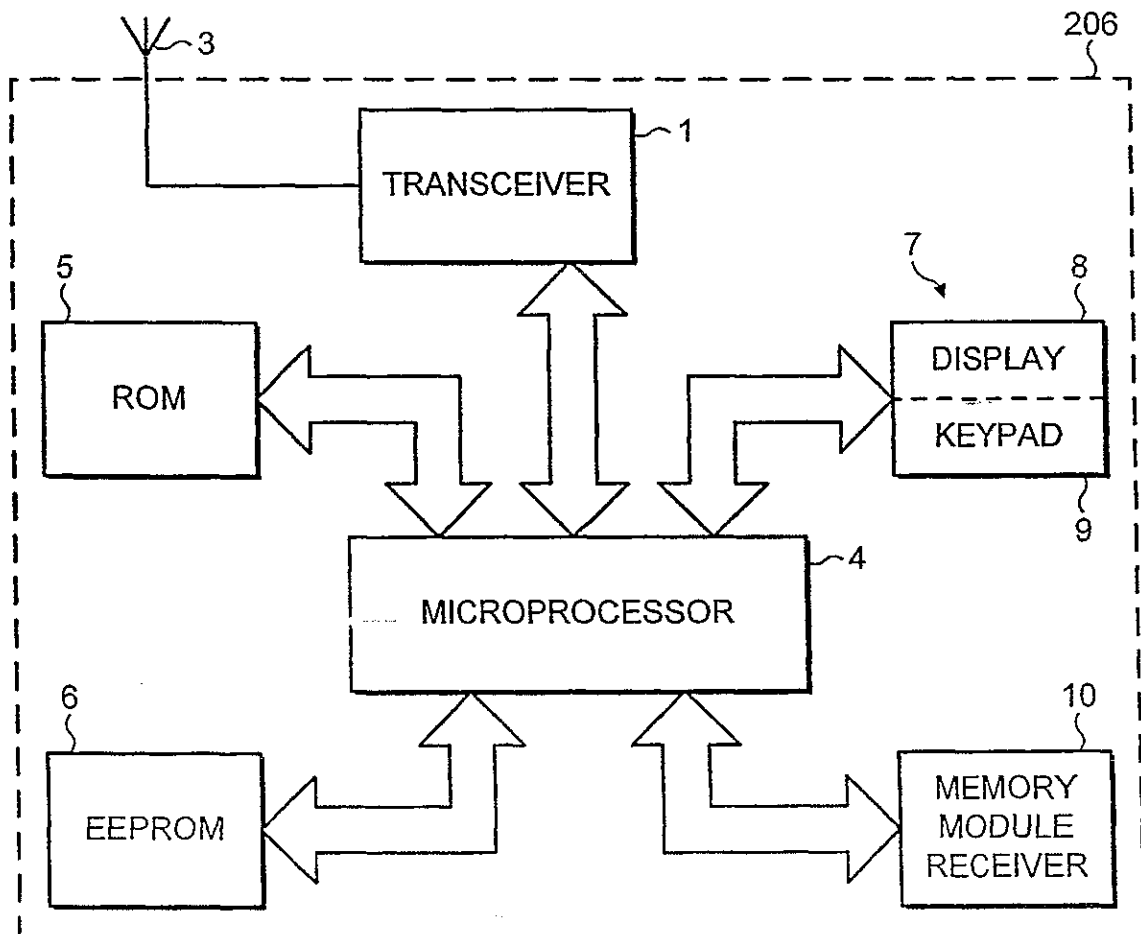


FIG. 14