



(51) International Patent Classification:
G02B 6/28 (2006.01) **G02B 6/12** (2006.01)

(21) International Application Number:
PCT/US2009/063984

(22) International Filing Date:
11 November 2009 (11.11.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/268,705 11 November 2008 (11.11.2008) US

(71) Applicant (for all designated States except US): **ALCA-TEL-LUCENT USA INC.** [US/US]; 600-700 Mountain Avenue, Murray Hill, NJ 07974-0636 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **DOERR, Christopher, R.** [US/US]; 17 Johnson Terrace, Middletown, NJ 07748 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(88) Date of publication of the international search report:
22 July 2010

(54) Title: METHOD AND APPARATUS FOR A SUBSTANTIALLY WAVELENGTH INSENSITIVE HYBRID DEVICE

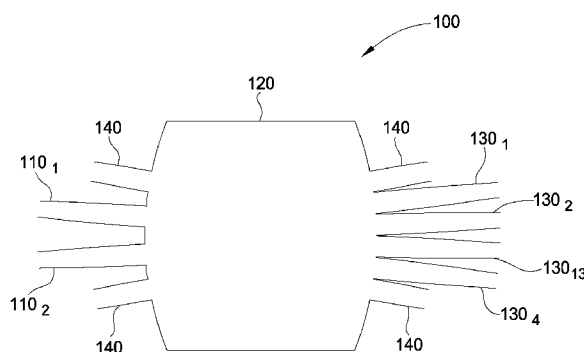


FIG. 1

(57) Abstract: Various embodiments include means of reducing wavelength dependency of an optical device by causing oscillating modes within at least one terminal associated with the device.