



(51) International Patent Classification:

E21B 36/00 (2006.01) *F28D 1/02* (2006.01)
F28F 27/00 (2006.01) *F28D 7/08* (2006.01)
F28F 27/02 (2006.01)

(21) International Application Number:

PCT/EP2013/058106

(22) International Filing Date:

18 April 2013 (18.04.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

20120615 24 May 2012 (24.05.2012) NO

(71) Applicant: **FMC KONGSBERG SUBSEA AS** [NO/NO];
 P.O.Box 1012, N-3601 Kongsberg (NO).

(72) Inventors: **BAUCK IRMANN-JACOBSEN, Tine**; Hvalstadåsen 95, N-1395 Hvalstad (NO). **BAGGERUD, Erik**; Almeliën 17B, N-1358 Jar (NO). **GYLES, Brian R.**; Østre Jansrud 39A, N-1383 Asker (NO).

(74) Agent: **ONSAGERS AS**; P.O.BOX 1813 Vika, N-0123 Oslo (NO).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: ACTIVE CONTROL OF SUBSEA COOLERS

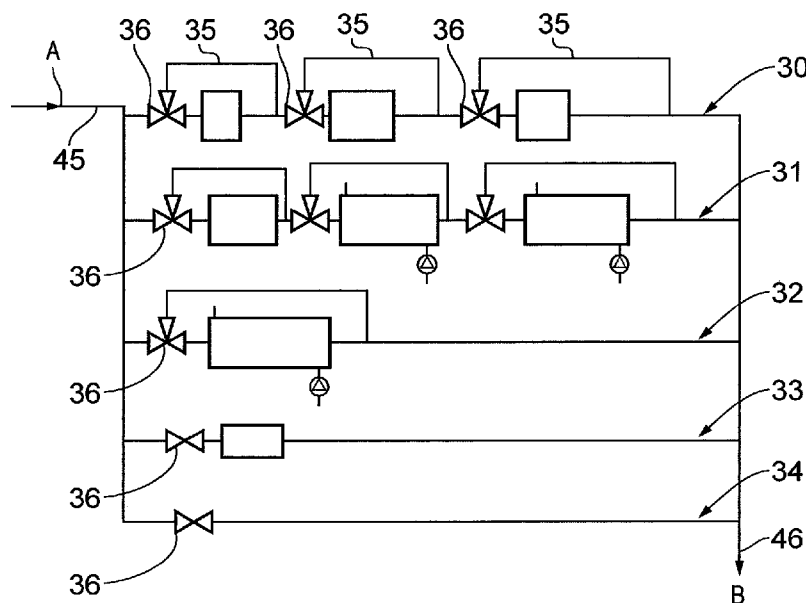


FIG. 4

(57) Abstract: A cooler system having an inlet (A) and an outlet (B), the cooler system comprising; at least a first cooler (20, 21, 22, 23, 24) and a second cooler (20, 21, 22, 23, 24), wherein the first cooler (20, 21, 22, 23, 24) and second cooler (20, 21, 22, 23, 24) are arranged in a series connection, the cooler system further comprises at least a third cooler (20, 21, 22, 23, 24) which is arranged in parallel connection with the first cooler (20, 21, 22, 23, 24) and second cooler (20, 21, 22, 23, 24), and the cooler system comprises at least one flow control device for directing flow through at least one cooler (20, 21, 22, 23, 24) wherein at least one of the coolers (20, 21, 22, 23, 24) comprises a bypass circuit and/or recirculation loop (35).