



- (51) International Patent Classification:
H04N 7/26 (2006.01)
- (21) International Application Number:
PCT/US2013/061224
- (22) International Filing Date:
23 September 2013 (23.09.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/705,119 24 September 2012 (24.09.2012) US
61/708,475 1 October 2012 (01.10.2012) US
14/033,308 20 September 2013 (20.09.2013) US
- (71) Applicant: **QUALCOMM INCORPORATED** [US/US];
ATTN: International IP Administration, 5775 Morehouse
Drive, San Diego, California 92121-1714 (US).
- (72) Inventor: **WANG, Ye-Kui**; 5775 Morehouse Drive, San
Diego, California 92121-1714 (US).
- (74) Agent: **KONIEWICZ, Sarah M.**; Shumaker & Sieffert,
P.A., 1625 Radio Drive, Suite 300, Woodbury, Minnesota
55125 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

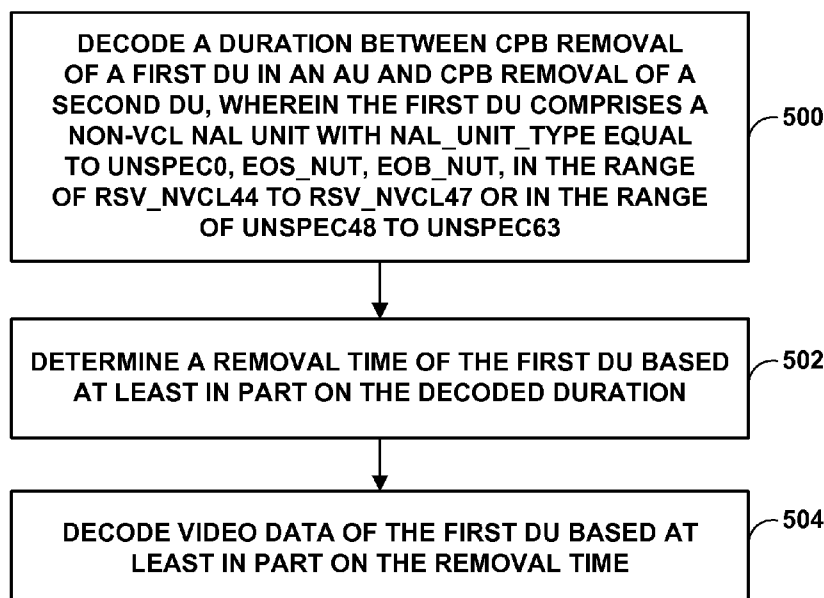
(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

[Continued on next page]

(54) Title: EXPANDED DECODING UNIT DEFINITION

**FIG. 11**

(57) Abstract: A video coding device, such as a video encoder or a video decoder, may be configured to decode a duration between coded picture buffer (CPB) removal time of a first decoding unit (DU) in an access unit (AU) and CPB removal time of a second DU, wherein the first DU comprises a non-video coding layer (VCL) network abstraction layer (NAL) unit with nal_unit_type equal to UNSPEC0, EOS_NUT, EOB_NUT, in the range of RSV_NVCL44 to RSV_NVCL47 or in the range of UNSPEC48 to UNSPEC63. The video decoder determines a removal time of the first DU based at least in part on the decoded duration and decodes video data of the first DU based at least in part on the removal time.



— *as to the applicant's entitlement to claim the priority of
the earlier application (Rule 4.17(iii))*

Published:

— *with international search report (Art. 21(3))*