

SELF-CLEANING POLYPROPYLENE FABRIC WEAVING LUBRICANT

This invention relates to compositions used to inhibit the increase in viscosity of lubricants used in manufacturing processes. This invention also relates to lubricants and cleaners used in the manufacture of polyolefin products. This invention particularly relates to the use of pyrrolidones as an additive to polyolefin processing hydrophobic lubricants.

10

Lubricants or finishes are added to polyolefins during manufacturing processes to decrease the friction between the polyolefin and metal processing equipment. The decrease in the friction prevents the build-up of heat in the processes. For example, when polyethylene or polypropylene is molded into solid parts or extruded into either thick or thin films, release agents or "slips" agents are added to the polyolefin to prevent an increase in temperature when the polyolefin comes into contact with the equipment. This feature of the lubricant is useful for preventing material manufactured from polyolefins from being melted or torn.

Finishes or lubricants are used in various stages of processes that weave, spin or draw polyolefin strands into fabrics. For example, lubricants are added to fabric in processes where the fabric becomes a component of a finished good. Lubricants are also useful in processes where adhesives or coatings are applied to the fabric to aid in the adhesion of the coating or adhesive to the polypropylene. Because the lubricant prevents frictional heat build-up, the melting or tearing of the fabric is avoided.

30

A specific-example of the use of lubricants to protect fabrics is in the manufacture of carpets. Polypropylene fiber is woven into fabrics that are used as the backing fabric for carpets. The fibers on the face of the carpet are tufted through a polypropylene fabric and an adhesive is applied to the back of the polypropylene/tufted fiber matrix to hold the fibers in place. High speed metal needles push the carpet fiber through the polypropylene fabric backing material causing the high speed needles to come into contact with the polypropylene filaments. Lubricants must be applied to the fiber or the needles will either break the filaments, which results in pieces of tuft continually falling off of the carpet; or, if the weave is tight, the filaments will break the tufting needles. The lubricant is normally applied to the polyolefin prior to the weaving processes.

45

One drawback in the use of lubricants in the above described processes is that excess lubricant causes a film to become deposited on various surfaces of the manufacturing equipment. For example, during the manufacture of carpets a film coats the surfaces of the loom. Another drawback is that the metal surfaces of the looms shave the polyolefin filaments to produce a fine polyolefin dust. This dust generally collects at the same areas of the loom where the lubricant film accumulates. The accumulation of the dust in the lubricant causes an increase in the viscosity of the lubricant and lowers its efficiency.

After continued use of the lubricant, it becomes saturated with the dust and a paste or gel is formed. The dust, film and paste accumulates in critical areas of the loom and contaminates the final woven fabric. Thus, workers must periodically clean the looms. To clean the looms, the workers generally dismantle the loom equipment and spray-dry it with hot water under high pressure to remove the undesirable material. The water may contain a surfactant. An alternative cleaning method is to spray-dry the equipment with an organic solvent (e.g., 140 Solvent or Naphtha 140).

These cleaning methods can take up to eight hours for each loom and each loom must be cleaned at least several times a year. Thus, the current cleaning procedures result in significant loom "down-time". Further, the use of solvents may create fire and other environmental hazards. Also, the clearing solvents generally evaporate into the surrounding atmosphere resulting in a significant waste of material.

Thus, an object of the invention is to reduce industrial loom "down-time". Another object of the invention is to reduce or eliminate the exposure of workers to hazardous organic solvents. Yet another object of the present invention is to decrease the expense related to the waste of the solvents. These and other objects of the invention will become apparent from the following discussion.

Provided herein is a solution comprising a water soluble solvent and a hydrophobic lubricant. The hydrophobic lubricant further comprises a hydrophobic polyolefin processing lubricant. Also provided herein is a self-cleaning lubricant system comprising: (a) a hydrophobic polyolefin processing lubricant; (b) a water soluble solvent capable of inhibiting an increase in the viscosity of the lubricant; and (c) a polyolefin processing machine containing a polyolefin; wherein the lubricant and the solvent are mixed with the polyolefin in the machine. Further provided is a method

for inhibiting an increase in viscosity in a mixture containing a polyolefin and a processing lubricant comprising: (a) adding a water soluble solvent to a polyolefin contained in a polyolefin processing machine wherein said solvent hinders the increase in
5 viscosity of the hydrophobic lubricant; (b) adding said lubricant to said polyolefin contained in said processing machine.

Thus, the invention provides for a solution, system and a method that inhibits the build-up of undesirable pastes and other poly-
10 olefin particulate matter from accumulating in standard lubricants.

Fig. 1 is a graph depicting the viscosity of an embodiment of the present invention in the presence of polypropylene.

15

Fig. 2 is a graph depicting the viscosity of yet another embodiment of the present invention in the presence of polypropylene.

Fig. 3 is a graph of the invention depicting the viscosity of an
20 embodiment of the present invention at 39 °C.

Fig. 4 is a graph of the invention depicting the viscosity of an embodiment of the present invention wherein the polyolefin used is polybutylene.

25

The lubricant solution and system comprises a hydrophobic lubricant and a water soluble component. Water may also be used as a component of the solution or system. Other components may also be used to carry out the invention such as organo siloxane or sili-
30 cone compounds - e.g., compounds that increase the lubricating properties of the system. Other additional components that may be used to practice the invention include surface tension reducing agents such as surfactants or wetting agents that are normally soluble in either water soluble solvent (or water) or the hydro-
35 phobic component.

The hydrophobic lubricant is preferably a polyolefin processing lubricant or a polyolefin fiber weaving lubricant. The lubricant can be a naturally occurring vegetable or seed oil such as, but
40 not limited to, soybean oil, peanut oil, sunflower oil, canola oil, corn oil, or olive oil. The hydrophobic lubricant also includes epoxidized peanut or soybean oil or propoxylated oil. Preferred hydrophobic lubricants comprise polymers of ethylene oxide or propylene oxide. The most preferred lubricants for carrying
45 out the invention are STANTEX 0332 (ethoxylated vegetable oil based polypropylene fiber weaving lubricant manufactured by the Henkel Corporation), CF - 0802 oil (a synthetic oil polymer of

ethylene/propylene oxide manufactured by Henkel Corporation) and PM-003-10 (Henkel Corporation).

The water soluble solvent of the invention includes compounds selected from the group of alkyl or alkoxy substituted pyrrolidones. The preferred alkyl or alkoxy substituted pyrrolidone are selected from the group of compounds comprising 2-pyrrolidones such as N-methyl-2-pyrrolidone, N-cyclohexyl-2-pyrrolidone, N-ethyl-2-pyrrolidone, N-propyl-2-pyrrolidone, N-hydroxyethyl-2-pyrrolidone, N-hydroxypropyl-2-pyrrolidone or N-butyl-2-pyrrolidone.

The water soluble solvent may also comprise an alcohol, a glycol or a propylene glycol. Other water soluble solvents that may be used in the invention include methyl, ethyl or propyl ethers. Representative compounds are butoxy ethanol, ethylene glycol mono methyl ether, ethylene glycol mono ethyl ether, ethylene glycol mono propyl ether, di-propylene glycol mono methyl ether, propylene glycol mono methyl ether, propylene glycol mono ethyl ether, propylene glycol mono butyl ether, di-propylene glycol mono ethyl ether, dipropylene glycol mono propyl ether, dipropylene glycol mono methyl ether, tripropylene glycol mono methyl ethyl 1-mono propyl and mono butyl ethers.

Optionally, the water soluble solvent may comprise blends of two or more of the water soluble solvents. Similarly, the hydrophobic solvent may also comprise two or more hydrophobic solvents.

The amount of the components can vary from application to application and are readily determined by routine experimentation such as those performed in the experiments set out below. However, the water soluble solvent must be present in an amount that inhibits the increase of viscosity of the hydrophobic lubricant. The solvent may also be used to dissolve the hydrophobic lubricant.

In one embodiment of the invention, the amount of hydrophobic lubricant ranges from about 10% to about 99% by weight and the water soluble component ranges from about 99% to about 1%. A preferred range comprises about 25% to about 76% of the hydrophobic lubricant and about 75 to 24% of the water soluble solvent. The most preferred range comprises about 55% to about 65% hydrophobic component and about 35% to about 45% water soluble component.

5

A preferred embodiment of the invention comprises water. In these embodiments, the amount, by weight, of the components ranges from about 25% to about 76% hydrophobic lubricant; about 40% to about 5% water; and about 40% to about 5% of the water soluble solvent. The preferred range comprises about 55% to about 65% by weight of the hydrophobic lubricant; about 10% to about 25% by weight water; and about 10% to about 25% by weight of the water soluble component. Preferably, the amount by weight of the water soluble solvent is about the same amount, by weight, as the amount of water present in the invention.

A preferred formulation of the present invention comprises about 17% of NMP about 17% water; and about 66% of the hydrophobic lubricant PM-003-10 STANTEX, wherein the total amount of the components, by weight, is 100%.

The solutions used to carry-out the invention are formed by mixing together the hydrophobic lubricant, the water soluble solvent and the water in a suitable container. Simple agitation (e.g., a propeller type of mixing blade operating at about 60 to 120 rpm) is adequate. The blending of the components is carried out at room temperature. When an alkyl or alkoxy pyrrolidone is present a sharp increase in temperature of the solution will occur.

25

While not being bound to any theory, it appears that hydrogen bonding occurs between the pyrrolidone compounds and water to create a large exotherm. As a result of this exotherm, a rise in the temperature of the solution can be expected. Depending on the amount of water and pyrrolidone present the temperature rise can range from 5°C to 20°C. Although some hydrogen bonding occurs between the glycol or glycol ether constituents and water, no appreciable exotherm is observed when they are mixed together. The complexing of the hydrophobic lubricant with the water soluble solvent appears to interfere with the affinity of the polyolefin dust to be drawn to the hydrophobic lubricant. Inhibiting the affinity of the dust to be drawn to the hydrophobic lubricant allows the lubricant to remain a flowing liquid.

The present invention also provides a method for inhibiting the increase in viscosity of lubricants in processes that make products out of polyolefins. Examples of the preferred processes include the molding, extruding and weaving of polyolefins such as polyethylene, polypropylene and polybutylene. The invention provides a self-cleaning lubricant, system and method that allows for the continuous clearing of manufacturing equipment such as looms. For example, the addition of NMP to a hydrophobic lubri-

cant used to clean "gum" or "paste" build-up of polyolefins in processes such as molding, extruding or weaving, provides a self-clearing solution which inhibits the formation of the "gum" or "paste".

5

The method can be used in processes where polypropylene is used to construct thin films which are used to make packaging materials such as food containing bags or trash bags. In one method, polyethylene is molded into containers for consumable li-
10 quid products such as plastic milk bottles and liquid detergent bottles. The present invention can also be used in applications where polyethylene and polypropylene are extruded into thick films (1/8 to one inch thick) to make construction materials such as fabricated holding tanks. These methods allow the lubricant to
15 remain a flowing liquid at higher concentrations of polyolefin particulate by preventing the formation of gels or pastes.

One embodiment of the present invention involves a method wherein strands of polyolefin yarn are passed through a bath containing
20 the lubricant. The lubricant and solvent are coated onto the strands of polyolefin yarn using a rotating "kiss roll" apparatus wherein the lubricant and the water soluble solvent are contained in a pan so that the yarn passes through the pan via a rotating apparatus traveling at speeds of hundreds of feet per minute.

25

Although the lubricant and the water soluble solvent can be added to the polyolefin directly as a mixture or by the addition of one material at a time, the preferred method comprises first mixing the hydrophobic lubricant with the water soluble solvent and then
30 adding the mixture directly to the polyolefin yarn prior to the start of the weaving or spinning processes.

Accordingly, the current invention is an improvement over existing yarn processing lubricants and can also be used as a lubri-
35 cant system for the processing of any polyolefin yarn or fiber.

The following examples are illustrative only and are not meant to limit the invention in any manner.

40 Example 1

Two hundred (200) grams of STANTEX 0332 (ethoxylated vegetable oil based polypropylene fiber weaving lubricant; manufactured by HENKE, L Corp.) and 200 grams of n-methyl-2-pyrrolidone (NMP) are
45 added to a 600 ml beaker. The beaker was placed onto a magnetic stirring device and the speed was set at a medium setting. The

7

two components were mixed for 5 minutes until a clear straw colored solution appeared. The mixing was performed at 24°C.

Example 2

5

One hundred (100) grams of NMP and approximately 2 grams of hard agglomerate residue taken from the metal surface of a polypropylene fabric weaving loom was added to a 250 ml beaker. The agglomerate was the result of the thickening of STANTEX 0332 lubricating oil and polypropylene dust present on the woven fibers. The clumps of agglomerate began to fall apart immediately.

Example 3

15 One hundred and twenty (120) grams of STANTEX 0332 oil and 40.0 grams of N-methyl-2-pyrrolidone were added to a 250 ml beaker to form a solution wherein the solution was stirred (magnetic stirring apparatus) at medium speed for about five minutes. Forty (40) grams of water was added to the solution. The temperature of the solution increased from 24°C to 41°C. The solution was mixed for another five minutes. The solution was allowed to cool to 24°C.

A large sample of polypropylene dust (representative of the dust which accumulates on a polypropylene fiber) was obtained from a polypropylene fabric weaving mill. The polypropylene dust was added, in 2% increments, to samples of 100% STANTEX 0332 oil and to the blend described above. The test was carried out at about 24°C. The viscosity of the samples were measured using a Brookfield Viscometer Model DV-II (Spindle SC4-34; Chamber 13R; and Speed 6). The results are listed in Table 1 and graphed in Figure 1.

Two hundred (200) grams of STANTEX 0332 (ethoxylated vegetable oil based polypropylene fiber weaving lubricant; manufactured by HENKEL Corp.) and 200 grams of n-methyl-2-pyrrolidone (NMP) are added to a 600 ml beaker. The beaker was placed onto a magnetic stirring device and the speed was set at a medium setting. The two components were mixed for 5 minutes until a clear straw colored solution appeared. The mixing was performed at 24 °C.

40

45

Table I

	Sample Addition	2% wt (g) pP	Oil/pP visc. (cP)	2% wt (g) pP	Oil (mix)/pP visc. (cP)
5	Oil/oil mix	-	180	-	120
	1	1.0175	240	1.0341	200
	2	1.0459	311	1.0211	270
	3	1.0274	361	1.0133	301
10	4	1.0024	361	1.0133	301
	5	1.0002	860	1.0533	501
	6	1.0177	1160	1.0188	852
	7	1.0133	1510	1.0136	1350
	8	1.0171	1890	1.0319	1670
15	9	1.0026	2390	1.0477	2000
	10	1.0166	3320	1.028	2780
	11	1.0142	4090	1.0183	3190
	12	1.0137	5130	1.0189	3970
20	13	1.0452	6050	1.011	4740
	14	1.0331	7050	1.0673	5740
	15	1.0393	7800	1.0462	6410
	16	1.0136	8850	1.021	7010
25	17	1.0457	10000	1.0717	7630
	18	-	-	1.0004	8220
	19	-	-	1.0091	9640
	20	-	-	1.0235	10000

30

The results show that after 34 % of the polypropylene dust was added to the 100% STANTEX 0332 oil the mixture became a solid-gel whereas the NMP/water/STANTEX 0332 mixture was still a flowing liquid and did not form a solid gel until after 40% of the poly-

35 propylene dust was added to the mixture.

Example 4

The same experiment as example 3 was performed except that

40 CF-0802 oil was used in place of the STANTEX 0332. CF - 0802 oil is a synthetic oil polymer of ethylene oxide/propylene oxide manufactured by Henkel Corporation. The results are listed in Table 2 and graphed in Figure 2.

45

Table 2

	Sample Addition	2% wt (g) pP	Oil/pP visc. (cP)	2% wt (g) pP	Oil (mix)/pP visc. (cP)
5	Oil/oil mix	-	60.1	-	30.1
	1	1.0181	75.2	1.0734	40.1
	2	1.0487	95.2	1.0101	55.1
	3	1.0227	130	1.0266	75.2
10	4	1.0184	155	1.0183	85.2
	5	1.0149	204	1.062	150
	6	1.0259	326	1.002	200
	7	1.0045	429	1.0501	265
	8	1.0231	589	1.085	388
15	9	1.001	736	1.051	445
	10	1.004	927	1.0327	596
	11	1.0155	1190	1.084	782
	12	1.0078	1330	1.0885	843
20	13	1.0057	1741	1.0017	1040
	14	1.003	2300	1.0225	1140
	15	1.0187	2670	1.0248	1280
	16	1.0566	2970	1.0954	1560
25	17	1.0633	3390	0.9437	1820
	18	1.0655	3770	1.0035	2430
	19	1.0029	4110	1.0664	2740
	20	1.0342	4780	1.0008	3210
30	21	1.0582	5000	1.0624	3850
	22			1.0035	4430
	23	-		1.017	4930
	24	-		1.0278	5000

35

Example 5

One hundred (100) grams of STANTEX 0332 lubricating oil and 40 grams of NMP were added to a 250 ml beaker and stirred (magnetic stirrer at medium speed). As in examples 2 and 3 above, 40 grams of water were added to the STANTEX 0332/NMP blend. However, the samples were maintained at a temperature of 39°C. A straight STANTEX blend was also heated up to 39 °C. Viscosity readings were taken for each sample.

45

10

Finely ground high molecular weight polyethylene dust was added to the solutions in 2% increments. The results as shown in Figure 3 show that at the point where the straight STANTEX 0332 oil gelled, the mixture was still a flowing liquid.

5

Example 6

The procedure was carried out as described in Example 4 except that polybutylene dust was used. Similarly, as shown in Figure 4, 10 the mixture was still a flowing liquid at the point where the straight oil gelled.

The invention has been described with reference to various specific embodiments. However, many variations and modifications may 15 be made while remaining within the scope of the invention.

20

25

30

35

40

45



CLAIMS

I claim:

- 5
1. A solution comprising a hydrophobic polyolefin processing lubricant and a water soluble solvent.
 2. The solution as recited in claim 1 wherein the amount by
10 weight of the hydrophobic lubricant ranges from about 10% to about 99% and the amount by weight of the water soluble solvent ranges from about 90% to about 1%.
 3. The solution as recited in claim 1 wherein the amount by
15 weight of the hydrophobic lubricant ranges from about 25% to about 76% and the amount by weight of the water soluble solvent ranges from about 75% to about 24%.
 4. The solution as recited in claim 1 wherein the amount by
20 weight of the hydrophobic lubricant ranges from about 55% to about 65% and the amount by weight of the water soluble solvent ranges from about 35% to about 45%.
 5. The solution as recited in claim 1 further comprising water.
25
 6. The solution as recited in claim 2 further comprising water.
 7. The solution as recited in claim 3 further comprising water.
 - 30 8. The solution as recited in claim 4 further comprising water.
 9. The solution as recited in claim 5 wherein the amount by weight of the hydrophobic lubricant ranges from about 25% to about 76%; the amount by weight of water ranges from 40% to about 5%; and the amount by weight of the water soluble solvent ranges from about 40% to about 5%.
35
 10. The solution as recited in claim 5 wherein the amount by weight of the hydrophobic lubricant ranges from about 55% to about 65%; the amount by weight of water ranges from 10% to about 25%; and the amount by weight of the water soluble solvent ranges from about 10% to about 25%.
40
 11. The solution as recited in claim 5 wherein the amount by
45 weight of the water soluble solvent is about the same amount by weight of water.





12. The solution as recited in claim 1 wherein the water soluble solvent comprises an alkyl or alkoxy substituted polidone.
13. The solution as recited in claims 2 wherein the water soluble solvent comprises an alkyl or alkoxy substituted pyrrolidone.
14. The solution as recited in claim 3 wherein the water soluble solvent comprises an alkyl or alkoxy substituted pyrrolidone.
15. The solution as recited in claim 4 wherein the water soluble solvent comprises an alkyl or alkoxy substituted pyrrolidone.
16. The solution as recited in claim 5 wherein the water soluble solvent comprises an alkyl or alkoxy substituted pyrrolidone.
17. The solution as recited in claim 6 wherein the water soluble solvent comprises an alkyl or alkoxy substituted pyrrolidone.
18. The solution as recited in claims 7 wherein the water soluble solvent comprises an alkyl or alkoxy substituted pyrrolidone.
19. The solution as recited in claim 8 wherein the water soluble solvent comprises an alkyl or alkoxy substituted pyrrolidone.
20. The solution as recited in claim 9 wherein the water soluble solvent -comprises an alkyl or alkoxy substituted pyrrolidone.
21. The solution as recited in claim 10 wherein the water soluble solvent comprises an alkyl or alkoxy substituted pyrrolidone.
22. The solution as recited in claim 11 wherein the water soluble solvent comprises an alkyl or alkoxy substituted pyrrolidone.
23. The solution as recited in claim 1 wherein the water soluble solvent comprises N-methyl-2-pyrrolidone.
24. The solution as recited in claims 2 wherein the water soluble solvent comprises N-methyl-2-pyrrolidone.
25. The solution as recited in claim 3 wherein the water soluble solvent comprises N-methyl-2-pyrrolidone.
26. The solution as recited in claim 4 wherein the water soluble solvent comprises N-methyl-2-pyrrolidone.





* C L H S *

WO 97/18347

PCT/EP96/05009

13

27. The solution as recited in claim 5 wherein the water soluble solvent comprises N-methyl-2-pyrrolidone.
28. The solution as recited in claim 6 wherein the water soluble solvent comprises N-methyl-2-pyrrolidone.
29. The solution as recited in claims 7 wherein the water soluble solvent comprises N-methyl-2-pyrrolidone.
30. The solution as recited in claim 8 wherein the water soluble solvent comprises N-methyl-2-pyrrolidone.
31. The solution as recited in claim 9 wherein the water soluble solvent comprises N-methyl-2-pyrrolidone.
32. The solution as recited in claim 10 wherein the water soluble solvent comprises N-methyl-2-pyrrolidone.
33. The solution as recited in claim 11 wherein the water soluble solvent comprises N-methyl-2-pyrrolidone.
34. The solution as recited in claim 33 wherein the amount by weight of the N-methyl-2-pyrrolidone is about 17%, the amount by weight of the hydrophobic lubricant is about 66%, and the amount of water by weight is about 17% wherein the total amount of the three components, by weight, is 100%.
- 35, A self-cleaning lubricant system comprising:
- (a) a hydrophobic polyolefin processing lubricant;
- (b) a water soluble solvent capable of inhibiting an increase in viscosity of the lubricant; and
- (c) a polyolefin processing machine containing a polyolefin; wherein the lubricant and the solvent are mixed with the polyolefin in the machine.
36. The system of claim 35 wherein the machine is a loom.
37. The system of claim 36 wherein the water soluble solvent comprises an alkyl or alkoxy pyrrolidone.
38. The system of claim 36 wherein the water soluble solvent comprises N-methyl-2-pyrrolidone.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED




39. The system of claim 38 wherein the polyolefin is selected from the group consisting of polyethylene, polypropylene and polybutylene.
- 5 40. The system of claim 38 wherein the polyolefin comprises polypropylene.
41. The system of claim 39 wherein the polyolefin is polypropylene.
- 10 42. The system of claim 41 wherein the amount by weight of the N-methyl-2-pyrrolidone is about 17%; the amount by weight of the water is about 17%; and the amount by weight of the lubricant is about 66% wherein the combined weight of the N-
- 15 methyl-2-pyrrolidone is about 100%.
43. A method for inhibiting an increase in viscosity in a mixture of a polyolefin and processing lubricant comprising:
- 20 (a) adding a water soluble solvent to a polyolefin contained in a polyolefin processing machine wherein said solvent is capable of inhibiting an increase in the viscosity of said polyolefin; and
- 25 (b) adding said lubricant to said polyolefin contained in said processing machine.
44. The method of claim 43 wherein the machine is a loom.
- 30 45. The method of claim 44 wherein the water soluble solvent comprises an alkyl or alkoxy pyrrolidone.
46. The method of claim 45 wherein the water soluble solvent comprises N-methyl-2 -pyrrolidone.
- 35 47. The method of claim 46 wherein the polyolefin is selected from the group consisting of polyethylene, polypropylene and polybutylene.
- 40 48. The system of claim 46 wherein the polyolefin comprises polypropylene.
49. The system of claim 47 wherein the polyolefin is polypropylene.




1/4

FIG.1

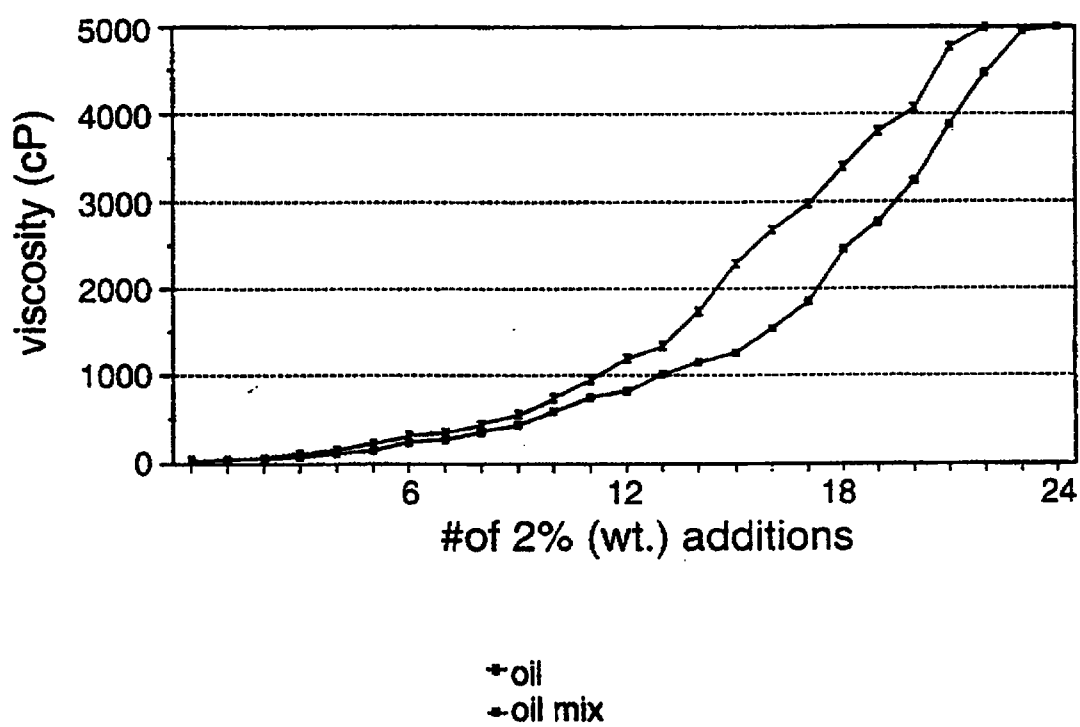


2/4

FIG.2

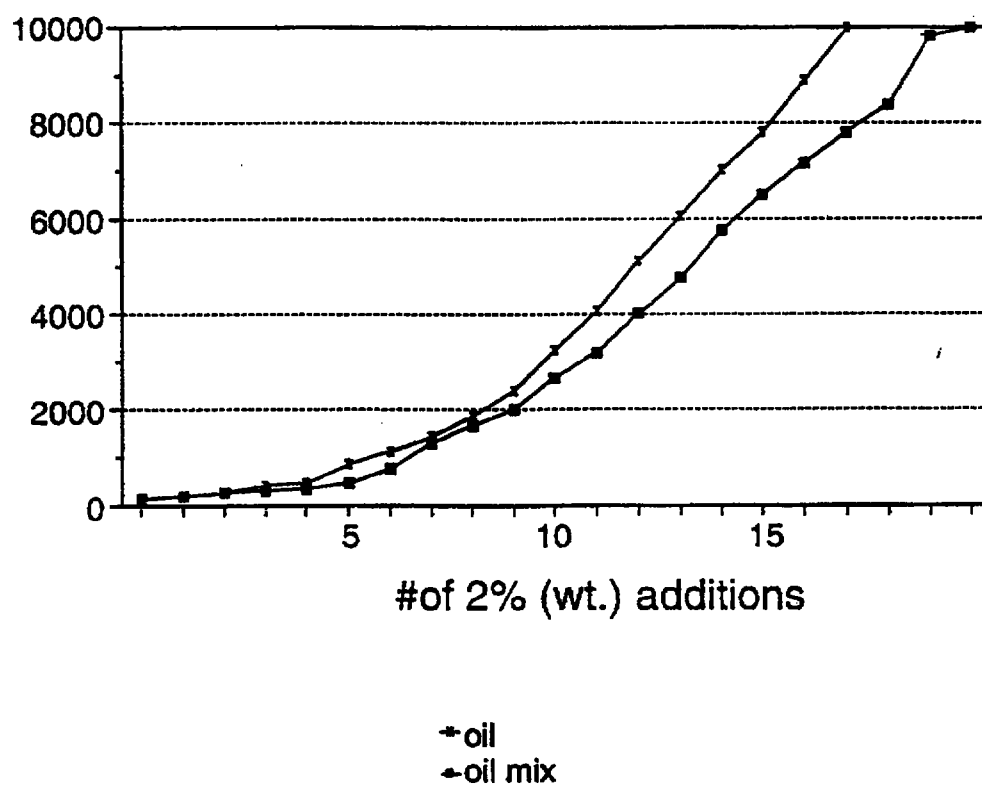


3/4

FIG.3

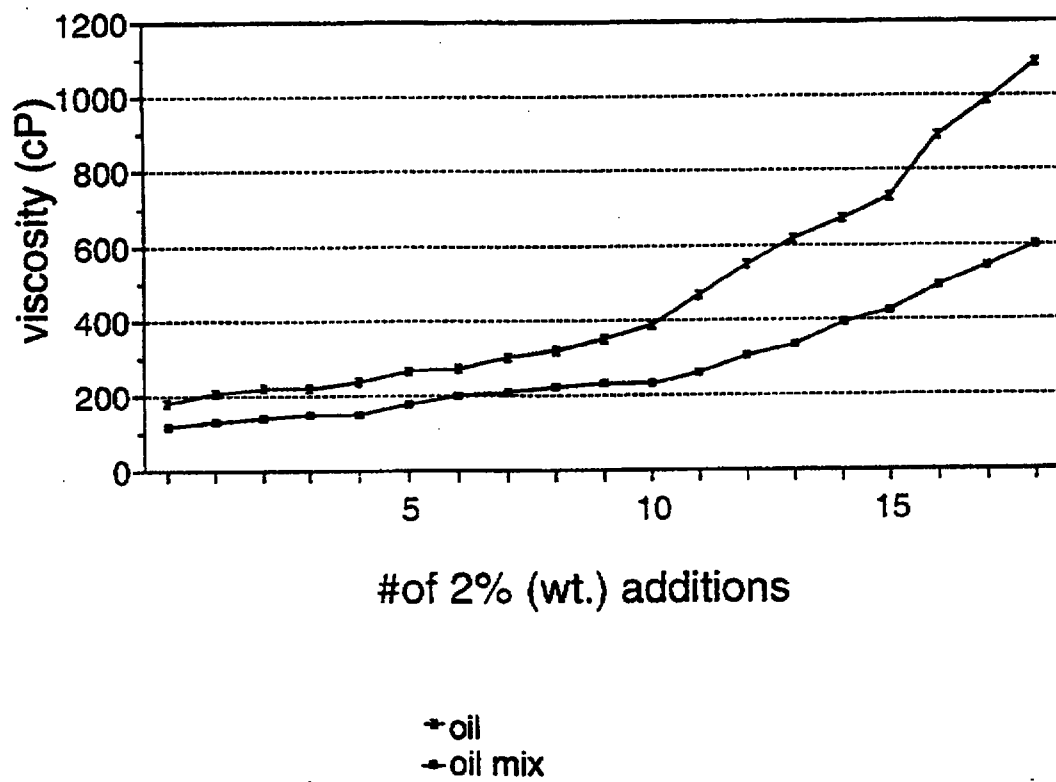

4/4

FIG.4

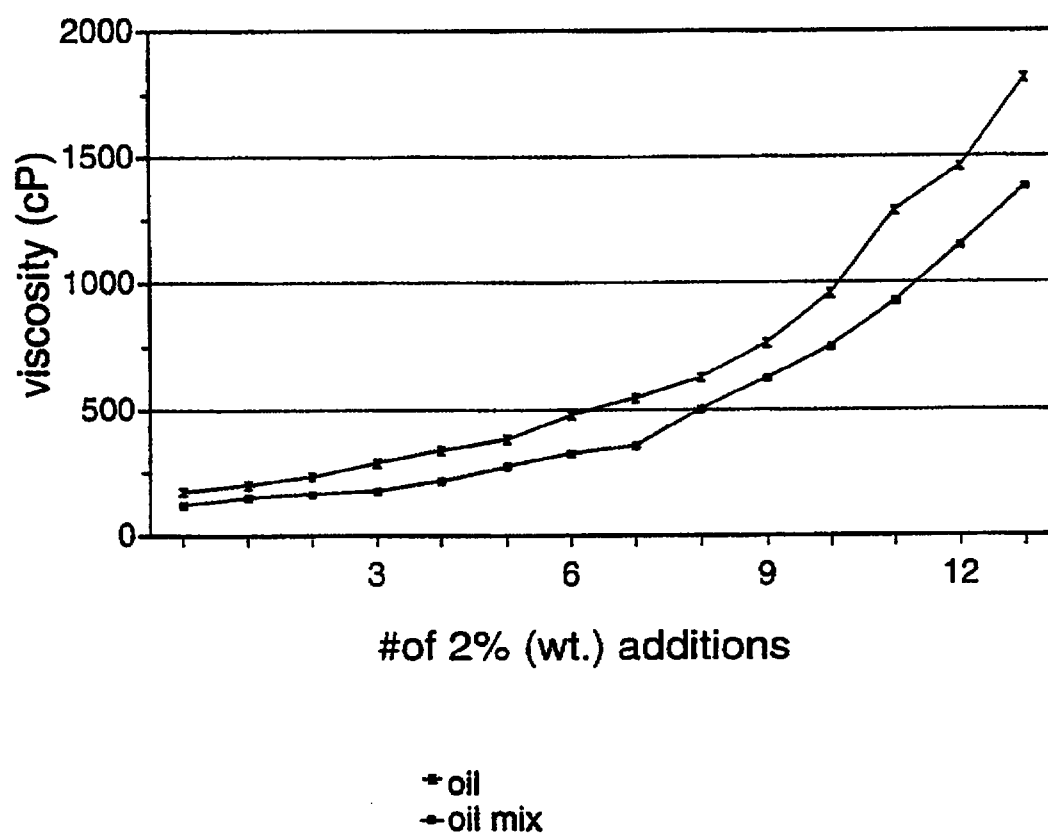



BASF Corporation

O.Z. 2063/08193

What is claimed is:

1. A solution comprising a hydrophobic lubricant, selected from a polyolefin processing lubricant or a polyolefin fiber weaving lubricant, and an alkyl or alkoxy substituted pyrrolidone.
2. The solution as recited in claim 1 wherein the amount by weight of the hydrophobic lubricant ranges from about 10 % to about 99 % and the amount by weight of the alkyl or alkoxy substituted pyrrolidone ranges from about 90 % to about 15 %.
3. The solution as recited in claim 1 or 2 further comprising water.
4. The solution recited in any of claims 1-3 wherein the amount by weight of the hydrophobic lubricant ranges from about 25 % to about 76 %, the amount by weight of water ranges from about 40 % to about 5 % and the amount by weight of the alkyl or alkoxy substituted pyrrolidone ranges from about 40 to about 5 %.
5. The solution as recited in any of claims 1-4 wherein the amount by weight of the alkyl or alkoxy substituted pyrrolidone is about the same amount by weight of water.
6. The solution as recited in any of claims 1-5 wherein the alkyl or alkoxy substituted pyrrolidone comprises N-methyl-2-pyrrolidone.
7. The solution as recited in any of claims 1-6 wherein the amount by weight of the N-methyl-pyrrolidone is about 17 %, the amount by weight of the hydrophobic lubricant is about 66 % and the amount by weight of water is about 17 % wherein the total amount of the three components, by weight, is 100 %.

This Sheet Has Been Replaced



AMENDED SHEET

THIS SHEET HAS BEEN
REPLACED



8. A self-cleaning lubricant system comprising:
 - (a) a hydrophobic lubricant selected from polyolefin processing lubricant or a polyolefin fiber weaving lubricant;
 - (b) an alkyl or alkoxy pyrrolidone capable of inhibiting an increase in viscosity of the lubricant; and
 - (c) a polyolefin processing machine containing a polyolefin, wherein the lubricant and the alkyl or alkoxy substituted pyrrolidone are mixed with the polyolefin in the machine.
9. The system of claim 8 wherein the machine is a loom comprising a yarn made from the polyolefin.
10. The system of claim 8 or 9 wherein the alkyl or alkoxy substituted pyrrolidone comprises N-methyl-2-pyrrolidone.
11. The system of any of claims 8-10 wherein the polyolefin is selected from the group consisting of polyethylene, polypropylene and polybutylene.
12. A method for inhibiting an increase in viscosity in a mixture of a polyolefin and processing lubricant comprising:
 - (a) adding an alkyl or alkoxy substituted pyrrolidone to a polyolefin wherein the alkyl or alkoxy substituted pyrrolidone is capable of inhibiting an increase in the viscosity of the polyolefin; and
 - (b) adding a hydrophobic lubricant, selected from a polyolefin processing lubricant or a polyolefin fiber weaving lubricant to the polyolefin.
13. The method of claim 12 wherein the alkyl or alkoxy substituted pyrrolidone comprises N-methyl-2-pyrrolidone.
14. The method of claim 12 or 13 wherein the polyolefin is selected from the group consisting of polyethylene, polypropylene and polybutylene.

This Sheet Has Been Replaced




REPLACED

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET




- 11 -

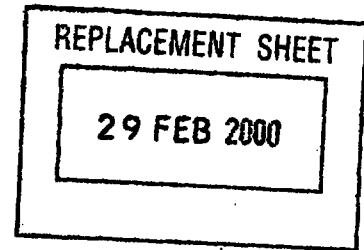

What is claimed is:

1. A solution comprising a hydrophobic lubricant, selected from a polyolefin processing lubricant or a polyolefin fiber weaving lubricant, and an alkyl or alkoxy substituted pyrrolidone.
2. The solution as recited in claim 1 wherein the amount by weight of the hydrophobic lubricant ranges from about 10 % to about 99 % and the amount by weight of the alkyl or alkoxy substituted pyrrolidone ranges from about 90 % to about 15 %.
3. The solution as recited in claim 1 or 2 further comprising water.
4. The solution recited in any of claims 1-3 wherein the amount by weight of the hydrophobic lubricant ranges from about 25 % to about 76 %, the amount by weight of water ranges from about 40 % to about 5 % and the amount by weight of the alkyl or alkoxy substituted pyrrolidone ranges from about 40 to about 5 %.
5. The solution as recited in any of claims 1-4 wherein the amount by weight of the alkyl or alkoxy substituted pyrrolidone is about the same amount by weight of water.
6. The solution as recited in any of claims 1-5 wherein the alkyl or alkoxy substituted pyrrolidone comprises N-methyl-2-pyrrolidone.
7. The solution as recited in any of claims 1-6 wherein the amount by weight of the N-methyl-pyrrolidone is about 17 %, the amount by weight of the hydrophobic lubricant is about 66 % and the amount by weight of water is about 17 % wherein the total amount of the three components, by weight, is 100 %.

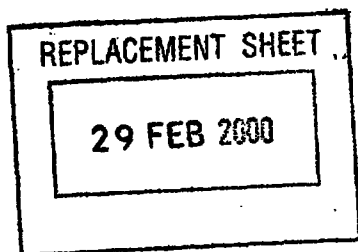

REPLACEMENT SHEET

- 12 -



8. A self-cleaning lubricant system comprising:
 - (a) a hydrophobic lubricant selected from polyolefin processing lubricant or a polyolefin fiber weaving lubricant;
 - (b) an alkyl or alkoxy pyrrolidone capable of inhibiting an increase in viscosity of the lubricant; and
 - (c) a polyolefin processing machine containing a polyolefin, wherein the lubricant and the alkyl or alkoxy substituted pyrrolidone are mixed with the polyolefin in the machine.
9. The system of claim 8 wherein the machine is a loom comprising a yarn made from the polyolefin.
10. The system of claim 8 or 9 wherein the alkyl or alkoxy substituted pyrrolidone comprises N-methyl-2-pyrrolidone.
11. The system of any of claims 8-10 wherein the polyolefin is selected from the group consisting of polyethylene, polypropylene and polybutylene.
12. A method for inhibiting an increase in viscosity in a mixture of a polyolefin and processing lubricant comprising:
 - (a) adding an alkyl or alkoxy substituted pyrrolidone to a polyolefin wherein the alkyl or alkoxy substituted pyrrolidone is capable of inhibiting an increase in the viscosity of the polyolefin; and
 - (b) adding a hydrophobic lubricant, selected from a polyolefin processing lubricant or a polyolefin fiber weaving lubricant to the polyolefin.
13. The method of claim 12 wherein the alkyl or alkoxy substituted pyrrolidone comprises N-methyl-2-pyrrolidone.
14. The method of claim 12 or 13 wherein the polyolefin is selected from the group consisting of polyethylene, polypropylene and polybutylene.



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : D06M 23/10	A1	(11) International Publication Number: WO 97/18347 (43) International Publication Date: 22 May 1997 (22.05.97)
(21) International Application Number: PCT/EP96/05009 (22) International Filing Date: 14 November 1996 (14.11.96) (30) Priority Data: 08/557,203 14 November 1995 (14.11.95) US (71) Applicants: BASF CORPORATION [US/US]; 3000 Continental Drive-North, Mount Olive, NJ 07828-1234 (US). BASF AKTIENGESELLSCHAFT [DE/DE]; D-67056 Ludwigshafen (DE). (72) Inventor: WALSH, William, C.; 26 Linden Lane, Archbold, OH 43502 (US). (74) Agents: STARK, Vera et al.; BASF Aktiengesellschaft, D-67056 Ludwigshafen (DE).		(81) Designated States: AU, BG, BR, CA, CN, CZ, GE, HU, IL, JP, KR, LV, MX, NO, NZ, PL, RO, RU, SG SI, SK, TR, UA, Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: SELF-CLEANING POLYPROPYLENE FABRIC WEAVING LUBRICANT (57) Abstract Provided herein is a composition, system and method containing a hydrophobic lubricant and a water soluble solvent. The invention may also contain water. Specific solvents include alkyl or alkoxy pyrrolidones such as N-methyl-2-pyrrolidone which are added to or mixed with loom lubricators. Also provided is a method for inhibiting the increase in viscosity of lubricants used in polyolefin processing methods. Polyolefin compounds such as polyethylene, polypropylene and polybutylene are some of the compounds used in the invention. Provided are solutions, methods and systems used in manufacturing processes that use polyolefins. The manufacturing processes include weaving, extruding and molding.		