



(51) International Patent Classification:

H04W 24/10 (2009.01) H04W 72/12 (2009.01)
H04W 76/04 (2009.01)

(21) International Application Number:

PCT/US2011/035214

(22) International Filing Date:

4 May 2011 (04.05.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

12/779,907 13 May 2010 (13.05.2010) US

(71) Applicant (for all designated States except US): **APPLE INC.** [US/US]; 1 Infinite Loop, Cupertino, California 95014 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SHI, Jianxiong** [CN/US]; 1 Infinite Loop, MS 302-1NS, Cupertino, California 95014 (US). **XING, Longda** [US/US]; 1 Infinite Loop, MS 302-1NS, Cupertino, California 95014 (US).

(74) Agents: **FERRAZANO, Michael, J.** et al.; Beyer Law Group LLP, P.O. Box 1687, Cupertino, California 95015-1687 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD TO CONTROL CONFIGURATION CHANGE TIMES IN A WIRELESS DEVICE

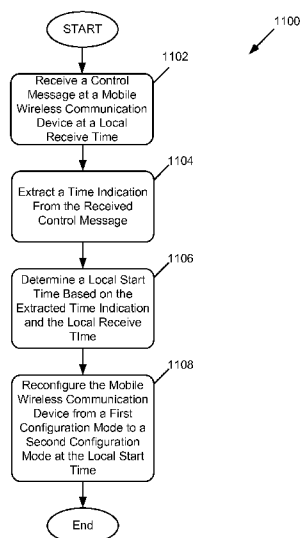


Figure 11

(57) Abstract: A method to control configuration change times is performed at a mobile wireless communication device when the mobile wireless communication device is connected to a wireless network. The mobile wireless device is connected in a first configuration mode. The mobile wireless communication device receives a control message from a radio network subsystem in the wireless network at a local receive time. The received control message includes a time indication for when to start a configuration mode change of the mobile wireless communication device, which the device extracts from the control message. The mobile wireless communication device reconfigures to a second configuration mode, different from the first configuration mode, based on the extracted time indication and the local receive time.