

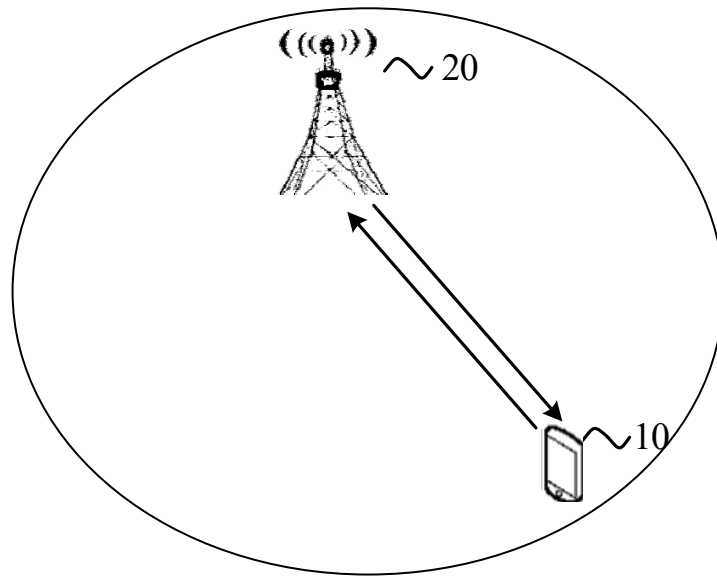


FIG. 1

100

A terminal device receives, in a second protocol layer, a first event reported by a first protocol layer, the first event indicating that qualities of one or more signals in a first signal set are poor enough to meet a first condition

~ 110

The terminal device determines, in the second protocol layer, based on the first event, that a second event occurs, the second event indicating that qualities of one or more links for the one or more signals in the first signal set are poor enough to meet a second condition

~ 120

FIG. 2

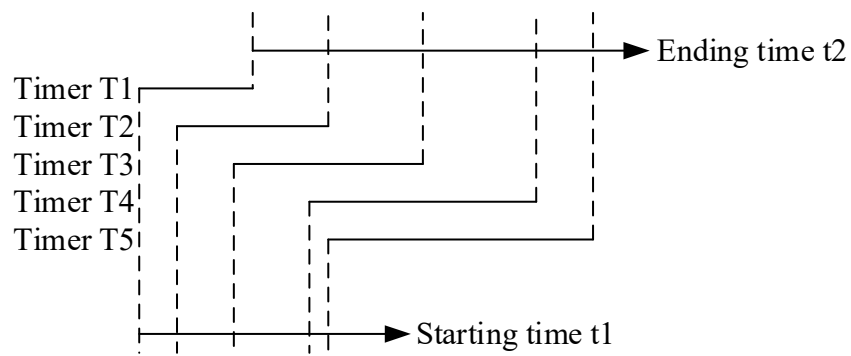


FIG. 3

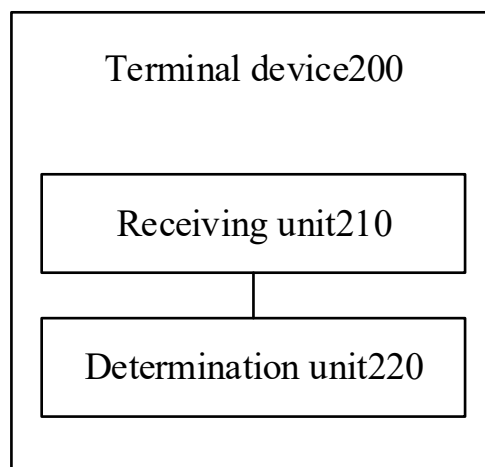


FIG. 4

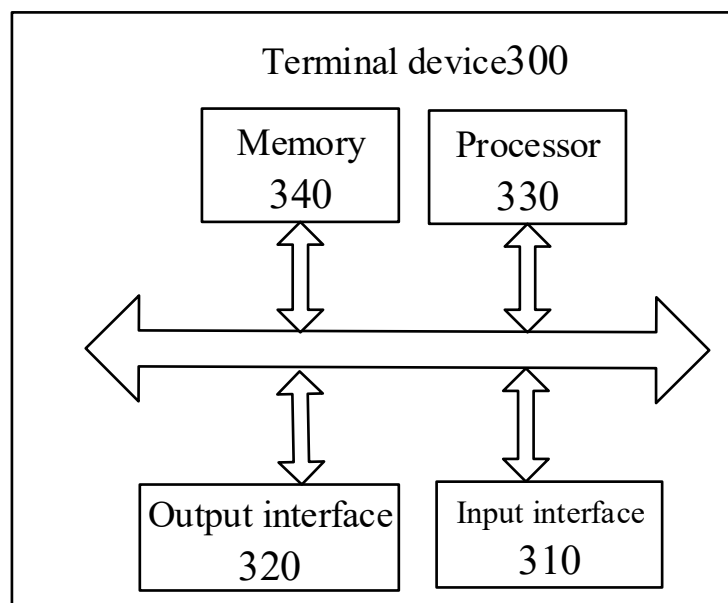


FIG. 5