



(51) International Patent Classification:

H04R 1/10 (2006.01) *H04R 3/00* (2006.01)
H04R 5/033 (2006.01)

(21) International Application Number:

PCT/US2012/046588

(22) International Filing Date:

13 July 2012 (13.07.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant (for all designated States except US): **RAZER (ASIA-PACIFIC) PTE. LTD.** [SG/SG]; 514 Chai Chee Lane, #07-05, Singapore, 469029 (SG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **GIANNUZZI, Joseph, Mario** [US/US]; 1700 Hollow Ridge Drive, Cedar Park, TX 78613 (US).

(74) Agent: **KOLBINGER, Karl, J.**; C/o Viering, Jentschura & Partner, 3770 Highland Ave., Suite 203, Manhattan Beach, CA 90266 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: AN AUDIO SIGNAL OUTPUT DEVICE AND METHOD OF PROCESSING AN AUDIO SIGNAL

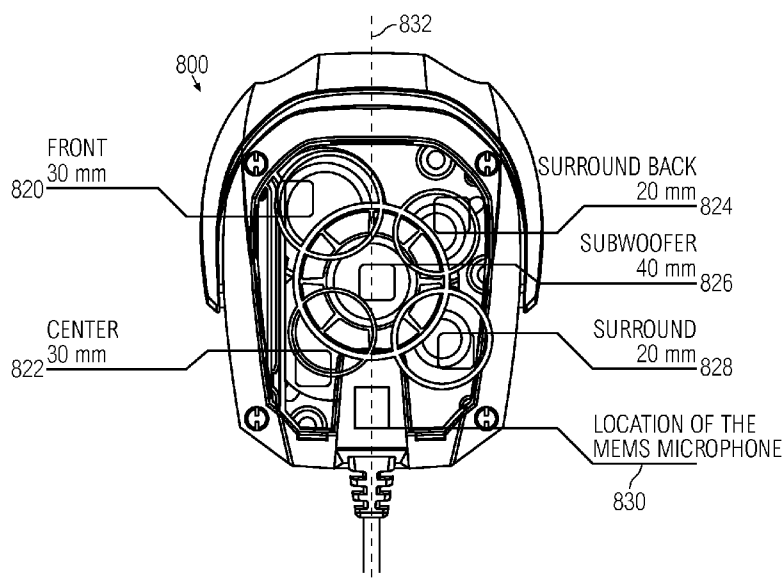


FIG. 8C

(57) Abstract: The present invention is a method of processing an audio signal comprising outputting a first part of a first audio signal; picking up the output first part of the first audio signal as a second audio signal; comparing a second part of the first audio signal and the second audio signal; modifying the second part of the first audio signal based on the result of the comparison; and outputting the modified second part of the first audio signal. An audio signal output device is also disclosed.