

CORRECTED VERSION

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
5 June 2003 (05.06.2003)

PCT

(10) International Publication Number  
**WO 2003/045820 A1**

(51) International Patent Classification<sup>7</sup>: **B65D 85/30**,  
85/48

(21) International Application Number:  
PCT/US2002/037926

(22) International Filing Date:  
26 November 2002 (26.11.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/333,682 27 November 2001 (27.11.2001) US

(71) Applicant (for all designated States except US): **ENTE-  
GRIS INC.** [US/US]; 3500 Lyman Boulevard, Chaska,  
MN 55318 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BORES, Gregory**  
[US/US]; 16611 Lyons Avenue S.E., Prior Lake, MN

55372 (US). **KALIA, Suraj** [IN/US]; 1385 Narcissus  
Curve, Victoria, MN 55386 (US). **TIEBEN, Anthony,**  
**Mathias** [US/US]; 13644 Old Brickyard Road, Shakopee,  
MN 55379 (US).


(74) Agents: **CHRISTENSEN, Douglas, J.** et al.; Patterson,  
Thuente, Skaar & Christensen, P.A., 4800 IDS Center, 80  
South Eighth Street, Minneapolis, MN 55402-2100 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,  
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,

[Continued on next page]

(54) Title: FRONT OPENING WAFER CARRIER WITH PATH TO GROUND EFFECTUATED BY DOOR

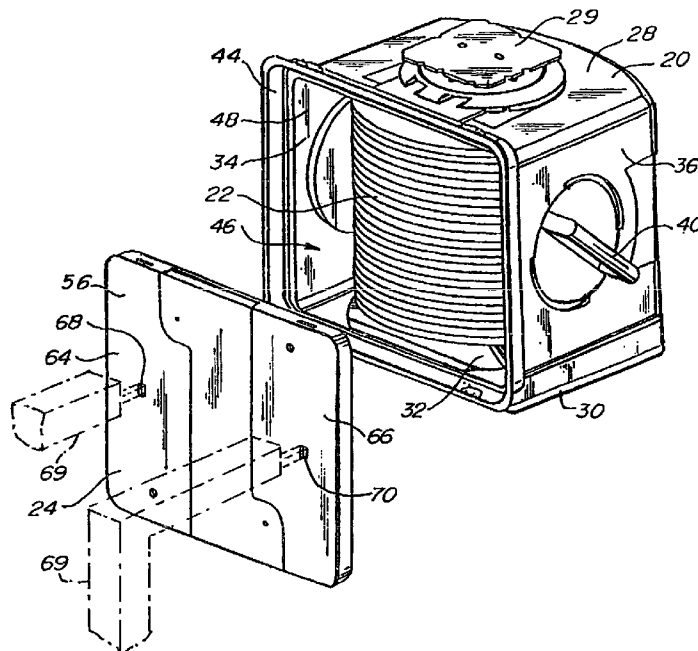

(57) Abstract: A front opening wafer carrier formed principally of plastic and comprising an enclosure portion (20) and a door (24) has a path to ground with respect to the wafers (22), the path to ground effectuated by the door (24). The base "ground" may be provided at the machine interface upon which the carrier sits, or through the robotic arm that grasps, operates and moves the door (24).

WO 2003/045820 A1



TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— *with international search report*

**(48) Date of publication of this corrected version:**

22 January 2004

**(15) Information about Correction:**

see PCT Gazette No. 04/2004 of 22 January 2004, Section II

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*