



(51) International Patent Classification:

E04B 2/58 (2006.01) *E04B 2/06* (2006.01)
E04B 1/58 (2006.01) *E04B 1/24* (2006.01)
E04B 2/76 (2006.01) *E04B 2/08* (2006.01)
A47B 57/16 (2006.01)

(21) International Application Number:

PCT/SG2010/000361

(22) International Filing Date:

24 September 2010 (24.09.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant (for all designated States except US): **2ELMS PTE. LTD.** [SG/SG]; 800 Upper Bukit Timah Road, Singapore 678139 (SG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **WYATT, Gary Donald** [AU/AU]; 4 Riverpark Drive, Wantirna South, VIC 3152 (AU).

(74) Agent: **POH, Chee Kian, Daniel**; Marks & Clerk Singapore LLP, Tanjong Pagar, PO Box 636, Singapore 910816 (SG).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

[Continued on next page]

(54) Title: A LOAD TRANSFER CONNECTOR FOR A SUPPORT MEMBER ASSEMBLY

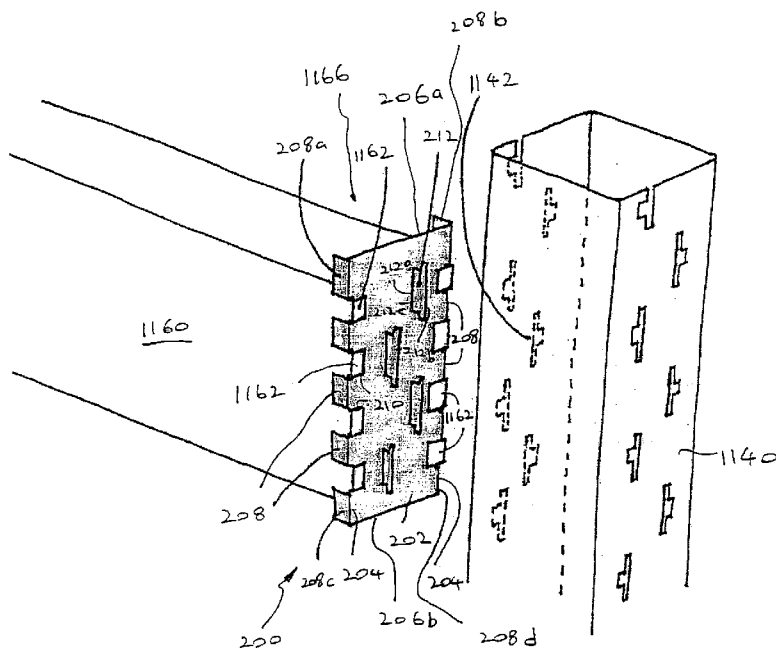


Figure 3

(57) Abstract: A load transfer connector (200) for a support member assembly (100) is disclosed herein. In a described embodiment, the connector (200) comprises a connector body (202), a set of interlocking members (208) configured to cooperate with corresponding interconnecting elements (1162) of a first elongate member (1160) to transfer a load bearing on the first elongate member (1160) to the connector body (202); a set of engagement members (212) configured to cooperate with corresponding interconnecting members (1142) of a second elongate member (1140) to transfer the load from the connector body (202) to the second elongate member (1140).



Published:

— *with international search report (Art. 21(3))*