

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
11 March 2004 (11.03.2004)

PCT

(10) International Publication Number
WO 2004/021300 A1

(51) International Patent Classification⁷: **G08B 1/08**,
H04Q 7/00

(IL). GENIN, Arcadi [IL/IL]; 12 Hachalmit Street, 67420
Bat Yam (IL). SENDER, Ran [IL/IL]; 23 Dobnov Street,
64369 Tel Aviv (IL).

(21) International Application Number:
PCT/IL2003/000677

(74) Agents: SANFORD T. COLB & CO. et al.; P.O. Box
2273, 76122 Rehovot (IL).

(22) International Filing Date: 14 August 2003 (14.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/228,841 27 August 2002 (27.08.2002) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*):
HI-G-TEK LTD. [IL/IL]; 16 Hacharoshet Street, 60375
Or-Yehuda (IL).


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **AUERBACH,**
Micha [IL/IL]; 52 Saifan Street, 71908 Maccabim (IL).
COHEN, Rony [IL/IL]; 7 Hadolev Street, 42823 Zoran

[Continued on next page]

(54) Title: ELECTRONIC LOCKING SEAL

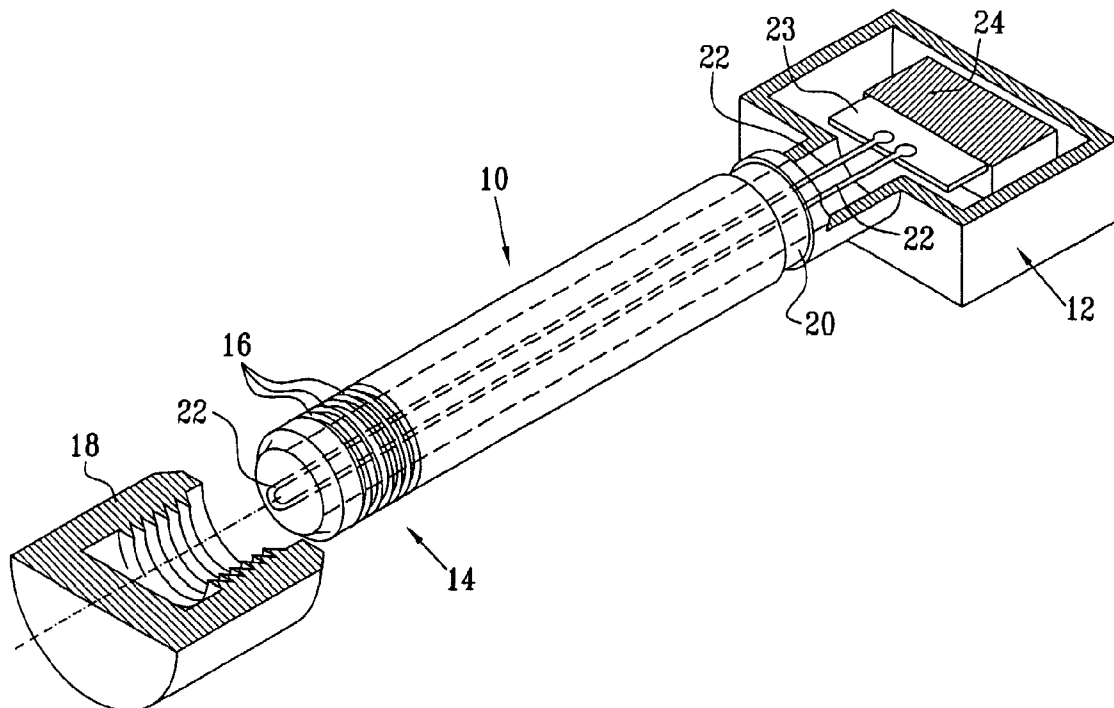

(57) Abstract: A tamper-resistant remotely monitorable electronic seal including a shaft portion (10), a socket arranged to engage the shaft portion in a monitorable manner, whereby disengagement of the socket (12) and the shaft portion results in a monitorable event, and a wireless communicator associated with at least one of the shaft portion and the socket and being operative to provide a remotely monitorable indication of the monitorable event.

WO 2004/021300 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.