



- (51) International Patent Classification:
A61M 16/06 (2006.01) *A62B 9/04* (2006.01)
- (21) International Application Number:
PCT/NZ2013/000139
- (22) International Filing Date:
8 August 2013 (08.08.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/681,024 8 August 2012 (08.08.2012) US
- (71) Applicant: FISHER & PAYKEL HEALTHCARE LIMITED [NZ/NZ]; 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ).
- (72) Inventors: MCLAREN, Mark Arvind; 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ). HAMMER, Jeroen; 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ).
- (74) Agents: BROWN, Hadleigh, R et al.; A J Park, PO Box 949, Wellington, 6140 (NZ).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

[Continued on next page]

(54) Title: HEADGEAR FOR PATIENT INTERFACE

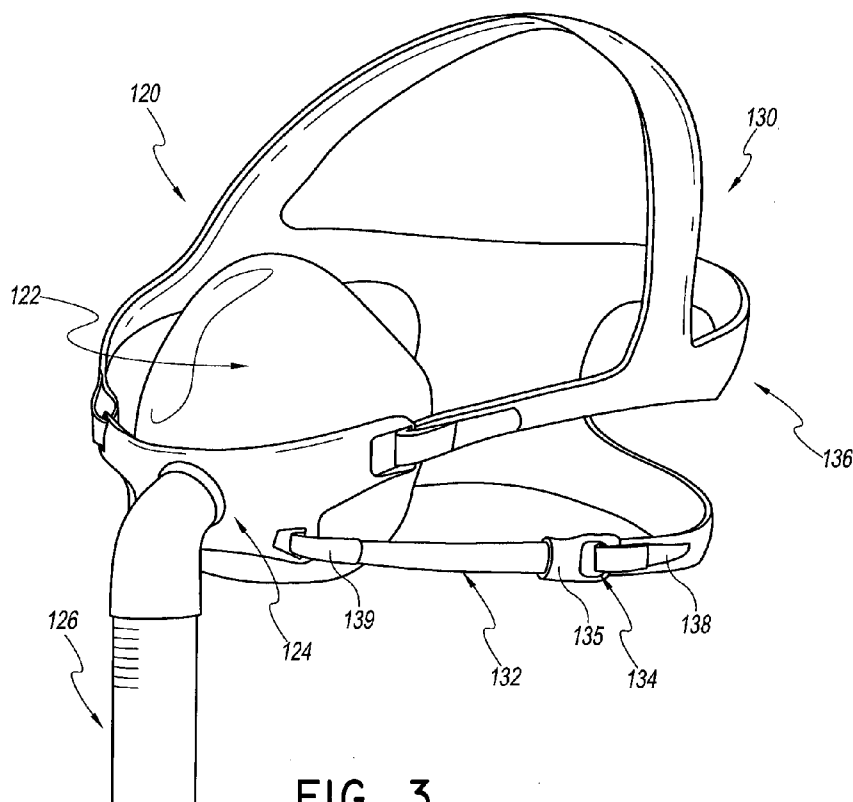


FIG. 3

[Continued on next page]



MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, **Published:**
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, — *with international search report (Art. 21(3))*
GW, KM, ML, MR, NE, SN, TD, TG).

(57) Abstract: An interface includes a mask. The mask includes a frame and a seal supported by the frame. Headgear is connected to the mask. The interface includes at least one of (i) an adjustment mechanism that can be set to a use length for a loop defined by the mask and the headgear; and (2) a break-fit assembly that can selectively lengthen the loop defined by the mask and the headgear and return to the use length.