(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
21 April 2011 (21.04.2011)

PCT

(10) International Publication Number
WO 2011/046950 A1

(51) International Patent Classification:
A61M 5/20 (2006.01)

(21) International Application Number:
PCT/US2010/052352

(22) International Filing Date:
12 October 2010 (12.10.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/251,236 13 October 2009 (13.10.2009) US
61/325,136 16 April 2010 (16.04.2010) US

(71) Applicant *(for all designated States except US)*: **VALERITAS, INC.** [US/US]; 750 Route 202 South, Suite 100, Bridgewater, NJ 08807 (US).

(72) Inventors; and
(75) Inventors/Applicants *(for US only)*: **GONNELLI, Robert, R.** [US/US]; 52 James Brite Circle, Mahwah, NJ 07430 (US). **LEVESQUE, Steven, F.** [US/US]; PO Box 514, North Pembroke, MA 02358-0514 (US).

(74) Agents: **HEMMER, John L.** et al.; Morgan, Lewis & Bockius, LLP, 1701 Market Street, Philadelphia, PA 19103 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

(54) **Title**: FLUID DELIVERY DEVICE

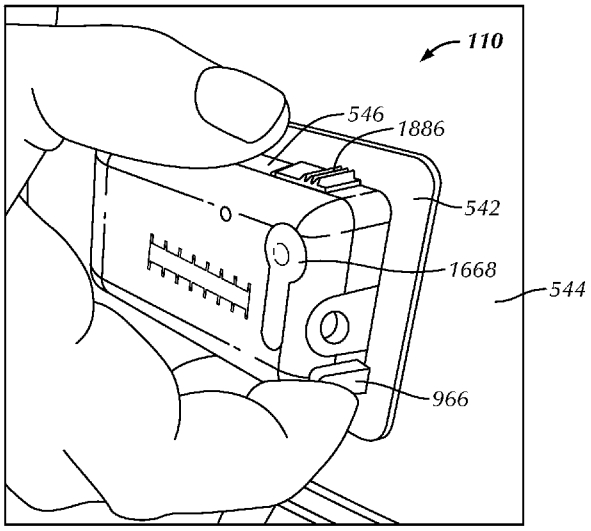


FIG. 9B

(57) **Abstract**: A fluid delivery device comprises a housing having a fluid reservoir. A needle is in fluid communication with the fluid reservoir in an engaged position and out of fluid communication with the fluid reservoir in armed and storage positions. A proximal end of a biasing member is coupled to the housing and a distal end of the biasing member is configured to deliver a force to the fluid reservoir. A piston member extends through the biasing member and is coupled to the distal end of the biasing member. The piston member is fixed with respect to the housing in a locked position such that the biasing member does not deliver the force to the fluid reservoir and moveable with respect to the housing in a released position such that the biasing member delivers the force to the fluid reservoir. Transitioning the needle from the storage position to the armed position transitions the piston from the locked position to the released position.

WO 2011/046950 A1