



(43) International Publication Date
19 September 2013 (19.09.2013)

(51) International Patent Classification:

F16L 47/03 (2006.01) *H05B 3/82* (2006.01)
B29C 65/34 (2006.01)

(21) International Application Number:

PCT/FI2013/050248

(22) International Filing Date:

7 March 2013 (07.03.2013)

(25) Filing Language:

Finnish

(26) Publication Language:

English

(30) Priority Data:

20125268 13 March 2012 (13.03.2012) FI

(71) Applicant: **MARICAP OY** [FI/FI]; Pohjantähdentie 17,
FI-01450 Vantaa (FI).

(72) Inventor: **SUNDHOLM, Göran**; Ilmari Kiannon kuja 3,
FI-04310 Tuusula (FI).

(74) Agent: **HEINÄNEN OY**; Äyritie 8 D, FI-01510 Vantaa
(FI).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) Title: PIPE JOINT AND METHOD FOR FORMING THE PIPE JOINT

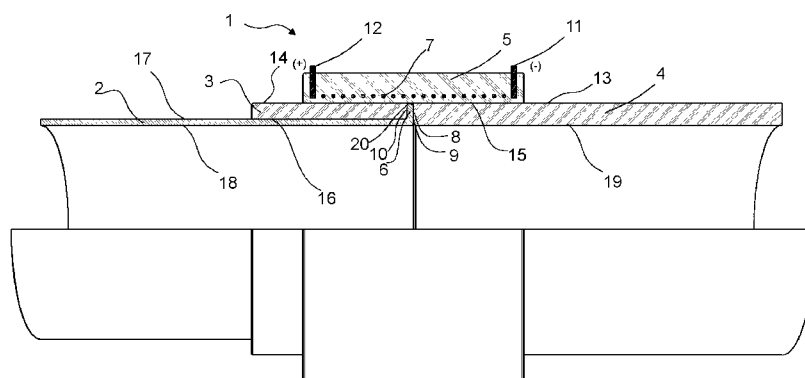


FIG. 1

(57) Abstract: Pipe joint, which comprises at least one first pipe section (2), and a sleeve part 5, into which the butt end part of the pipe section (2) is disposed in such a way that the sleeve part (5) extends a distance on top of the pipe section (2) from the butt end of the pipe section that is inside the sleeve, and heating means (7), such as resistance wires. For forming the joint, a joint component (3) is arranged between the outer surface (16) of at least one pipe section (2) and the inside surface (15) of the sleeve part (5), which joint component is configured to form a joint with the sleeve part (5) when the joint area is warmed with the heating means (7), and that a collar (6) is arranged on the pipe section (2), which collar comprises a detent surface (10) for the joint component (3). The invention also relates to a method for forming a pipe joint.