



[図1]

	組成(質量%)					条件 (1)	条件 (2)	ヤング率 (GPa)	引張強さ (MPa)
	Cu	Si	Mg	Ni	P				
実施例1	8.2	13.3	0.6	6.0	<0.001	13.42	33.13	99	172
実施例2	10.1	13.2	0.5	6.0	<0.001	15.32	34.81	96	217
実施例3	11.9	13.3	0.5	6.1	<0.001	17.21	36.81	102	218
実施例4	14.7	13.2	0.6	4.0	0.01	18.18	35.10	99	251
実施例5	14.7	8.5	0.5	6.1	<0.001	20.01	34.64	98	261
実施例6	14.7	5.6	0.6	6.0	<0.001	19.92	31.54	96	205
実施例7	15.0	16.4	0.6	5.9	0.01	20.13	42.42	108	181
実施例8	15.0	13.8	0.5	6.0	<0.001	20.22	40.02	103	181
実施例9	15.1	13.4	0.5	2.1	<0.001	16.93	31.84	95	251
実施例10	17.0	13.1	0.5	6.1	0.003	22.31	41.40	104	170
比較例1	4.7	13.0	0.6	5.9	<0.001	9.83	29.34	95	160
比較例2	18.5	13.6	0.6	5.9	<0.001	23.63	42.91	104	119


[図2]

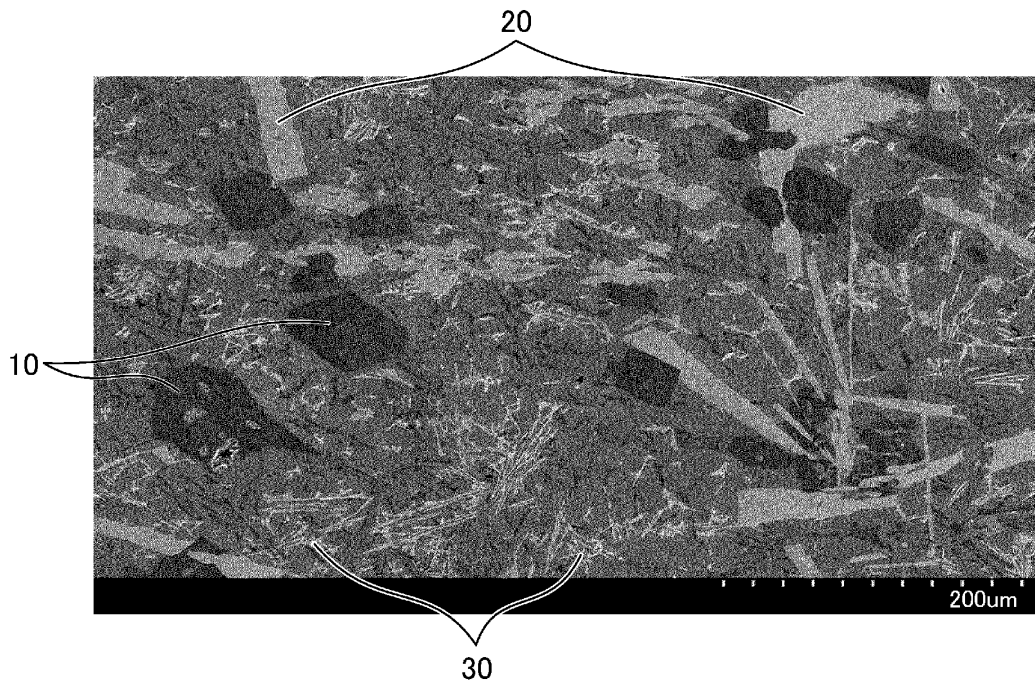


[図3]

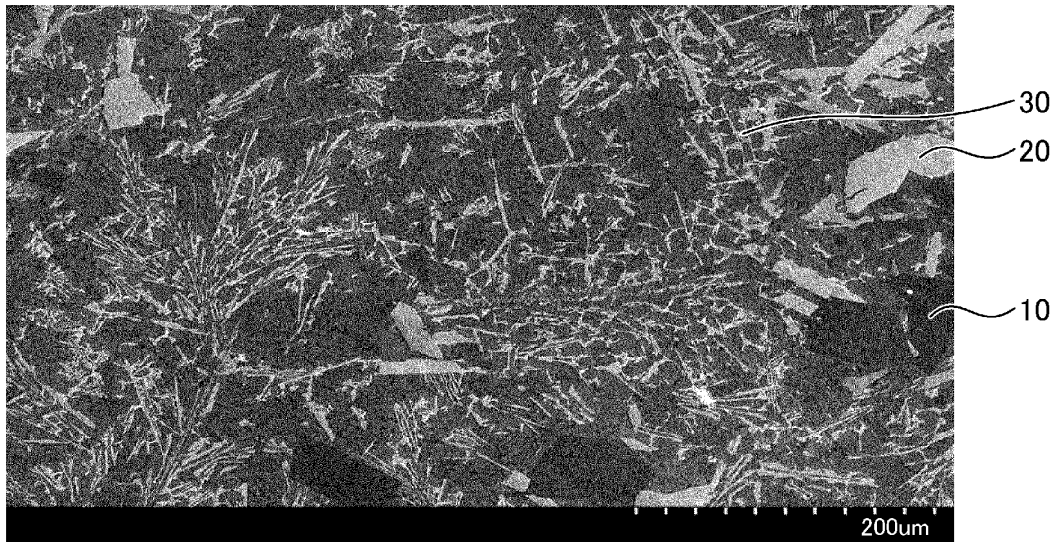


[図4]

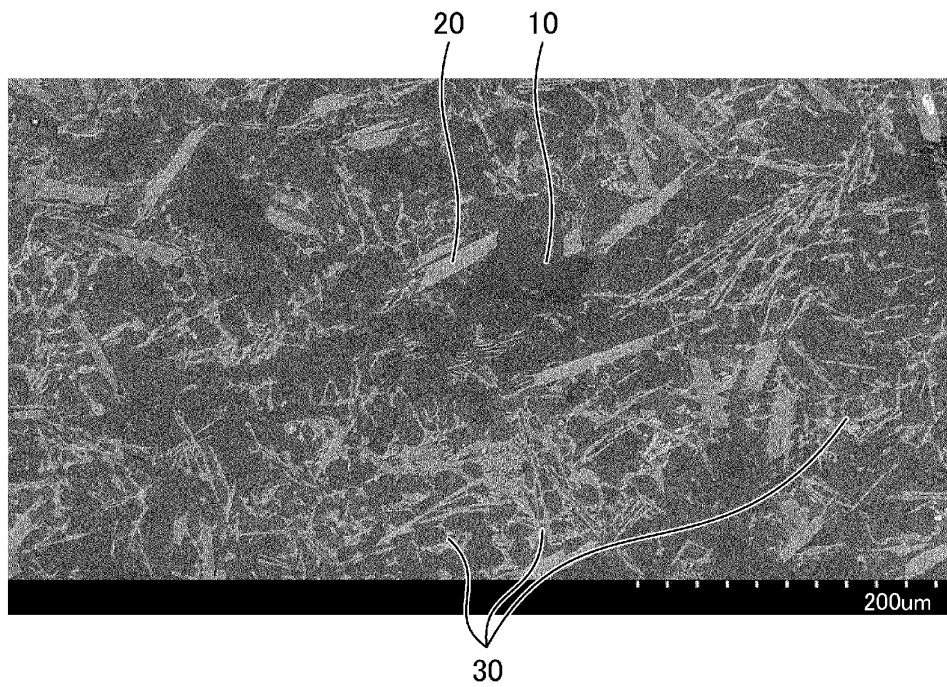


[図5]

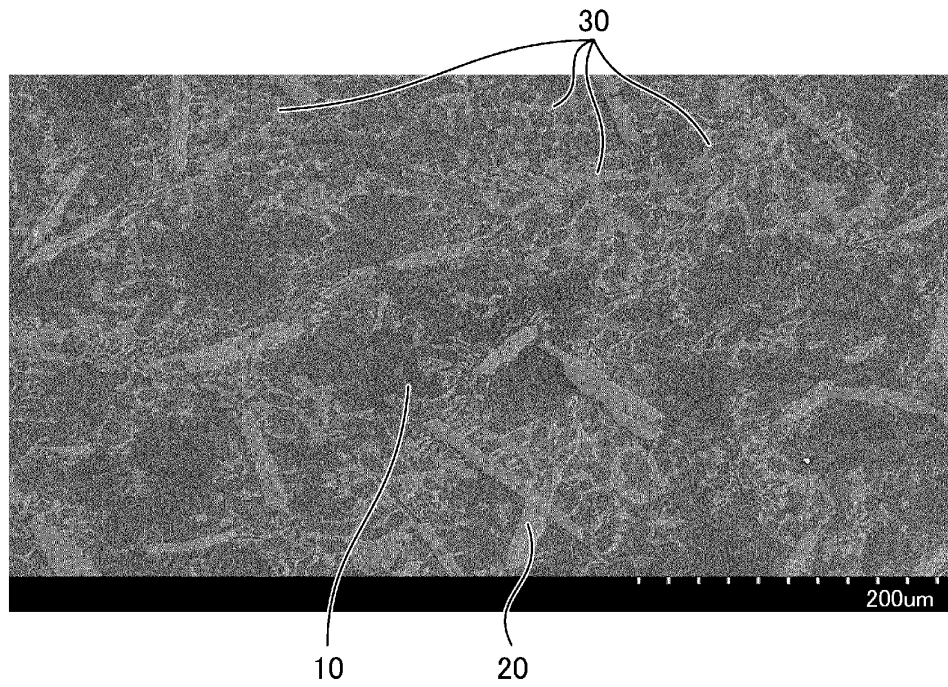

[図6]

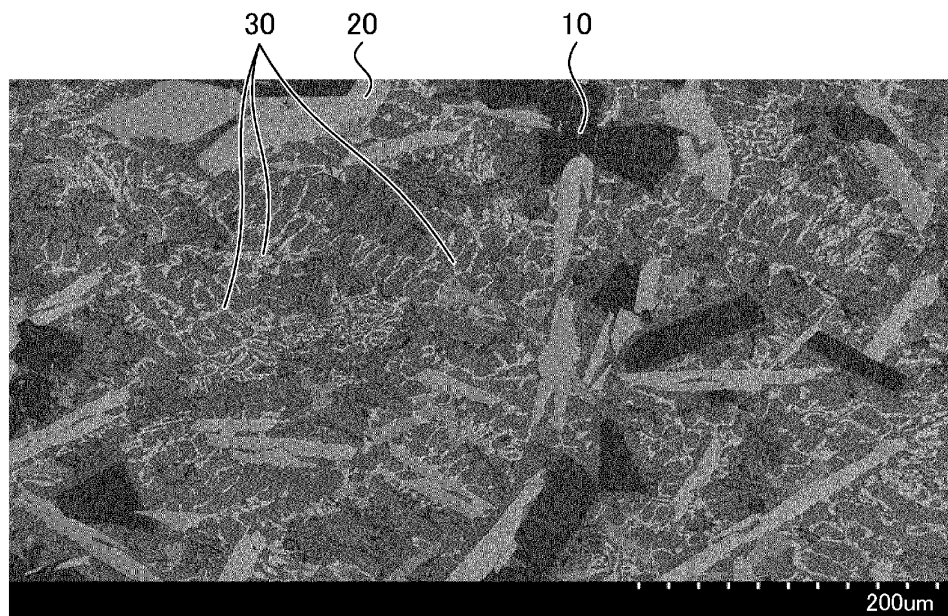

[図7]

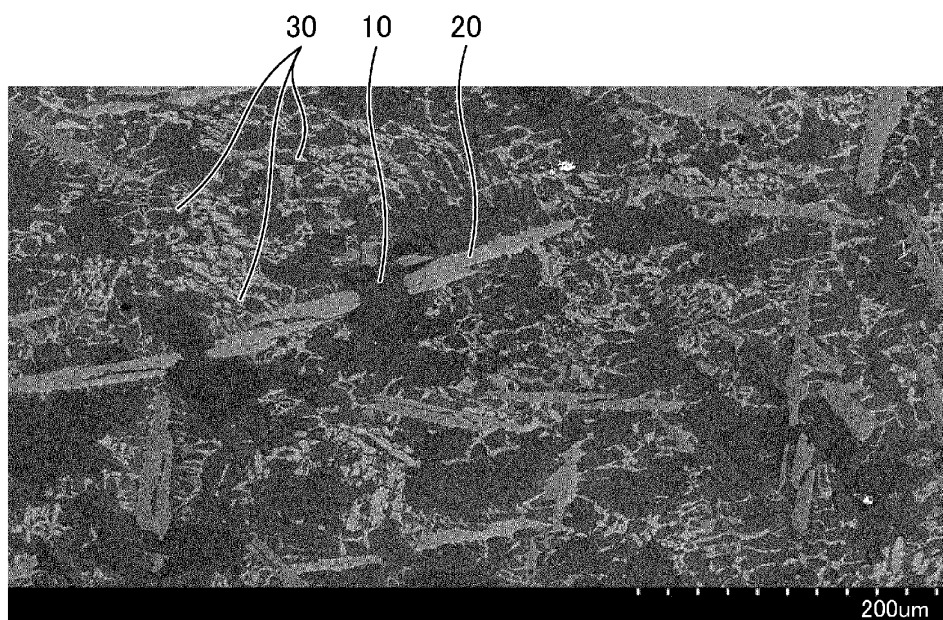

[図8]

