



(51) International Patent Classification:
H04L 29/06 (2006.01) *H04W 48/16* (2009.01)
H04W 12/12 (2009.01)

(21) International Application Number:
PCT/US2017/063591

(22) International Filing Date:
29 November 2017 (29.11.2017)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
15/418,693 28 January 2017 (28.01.2017) US

(71) Applicant: **QUALCOMM INCORPORATED** [US/US];
ATTN: International IP Administration, 5775 Morehouse
Drive, San Diego, California 92121-1714 (US).

(72) Inventors: **AHMADZADEH, Seyed Ali**; 5775 Morehouse
Drive, San Diego, California 92121-1714 (US). **DAS, Sau-
mitra Mohan**; 5775 Morehouse Drive, San Diego, Cal-
ifornia 92121-1714 (US). **CHEN, Yin**; 5775 Morehouse
Drive, San Diego, California 92121-1714 (US). **NANDHA
PREMNATH, Sriram**; 5775 Morehouse Drive, San Diego,
California 92121-1714 (US).

(74) Agent: **HANSEN, ROBERT M.** et al.; The Marbury Law
Group, PLLC, 11800 Sunrise Valley Drive 15th Floor, Re-
ston, Virginia 20191 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,

(54) Title: ROGUE ACCESS POINT DETECTION USING MULTI-PATH VERIFICATION

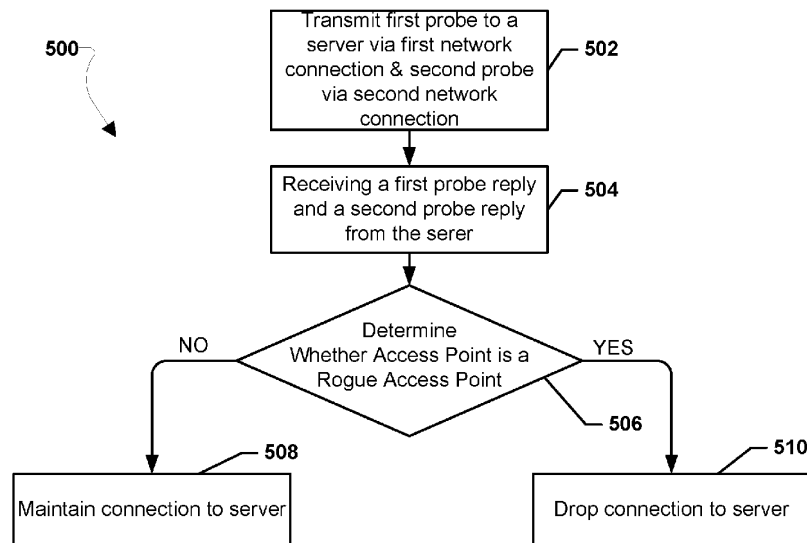


FIG. 5

(57) Abstract: Various embodiments provide methods, devices, and non-transitory processor-readable storage media enabling rogue access point detection with a communications device by sending multiple probes via different network connections to a remote server and receiving probe replies. Various embodiments may include a communication device transmitting a first probe addressed to a server via a first network connection and a second probe addressed to the server via a second network connection. Upon receiving a first probe reply from the server via the first network connection and a second probe reply from the server via the second network connection server, the communications device may analyze the received probe replies to determine whether an access point of either the first network or the second network is a rogue access point.

OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*