



(51) International Patent Classification:

F41G 1/30 (2006.01) *F41G 3/08* (2006.01)
F41G 1/473 (2006.01) *F41G 3/10* (2006.01)
F41G 3/06 (2006.01) *G02B 23/10* (2006.01)

(21) International Application Number:

PCT/EP2010/059419

(22) International Filing Date:

2 July 2010 (02.07.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0950541-3 8 July 2009 (08.07.2009) SE

(71) Applicant (*for all designated States except US*): **GS Development AB** [SE/SE]; Jägershillgatan 15, S-213 75 Malmö (SE).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **HÅKANSON, Håkan** [SE/SE]; Astrakanvägen 6, SE-224 56 Lund (SE). **WIKLUND, Ralf** [SE/SE]; Solskensgatan 23, SE-260 35 Ödåkra (SE). **GUNNARSSON, Kjell** [SE/SE]; Pugerupsvägen 12, SE-243 95 Höör (SE). **BRANDT,**

Mikael [SE/SE]; Vinbärsvägen 3, SE-245 44 Staffanstorp (SE). **TRULSSON, Håkan** [SE/SE]; Reginavägen 24, SE-213 63 Malmö (SE).


(74) Agent: **Ström & Gulliksson AB (Lund)**; Box 793, SE-220 07 Lund (SE).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: FIRE-CONTROL SYSTEM

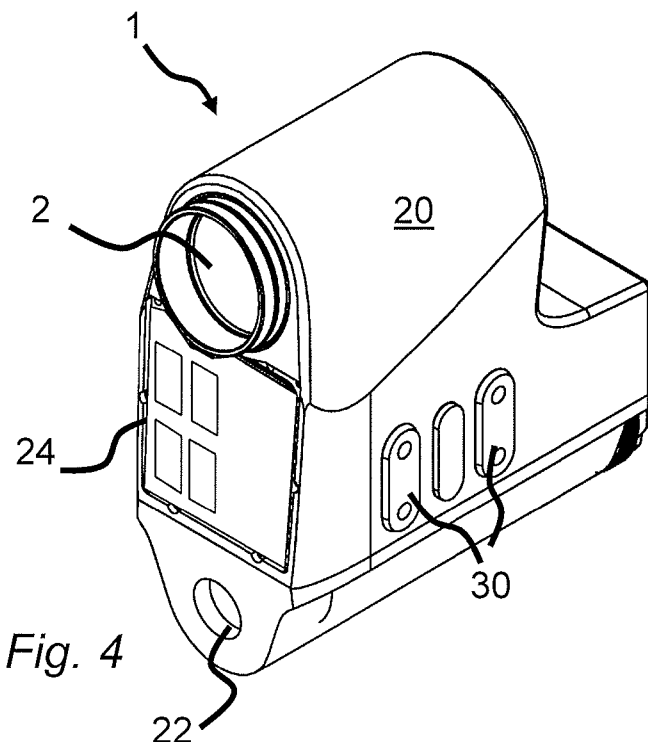

(57) Abstract: A fire-control system comprising - a housing, - a light channel, through which a user may directly observe a target and receive visually displayed information simultaneously, said light channel comprising partially reflective optics a light source, for visualization of a reticle to the user via the partially reflective optics, - means for receiving a measure of the distance to the target a processor, for determining the adequate position of the reticle, based on the distance to the target, and for controlling the light source to emit light so that the reticle is visualized at the adequate position, wherein the light source is an array capable of selectively emitting light in well defined locations on its surface.

WO 2011/003814 A1



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, **Published:**
GW, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*