



(51) International Patent Classification:
B65D 19/00 (2006.01)

(21) International Application Number:
PCT/EP2009/059094

(22) International Filing Date:
15 July 2009 (15.07.2009)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **ECO-BLOCK INTERNATIONAL LIMITED** [CN/CN]; Room 1904, Chinachem Exchange Square II, 338 King's Road, Hong Kong (CN).

(71) Applicant (for BW only): **BROWNE, Robin Forsythe** [GB/GB]; Leaman Browne, 5 South Parade, Leeds Yorkshire LS1 5QX (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LOW, Eng Choon** [SG/CN]; Room 1904, Chinachem Exchange Square II, 338 King's Road, Hong Kong (CN).

(74) Agent: **BROWNE, Robin, Forsythe**; Leaman Browne, Pearl Chambers, 22 East Parade, Leeds LS1 5BY (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: PALLET THAT CAN BE ASSEMBLED WITH SLIDING BOARDS AND A LOCKING SPINE MEMBER

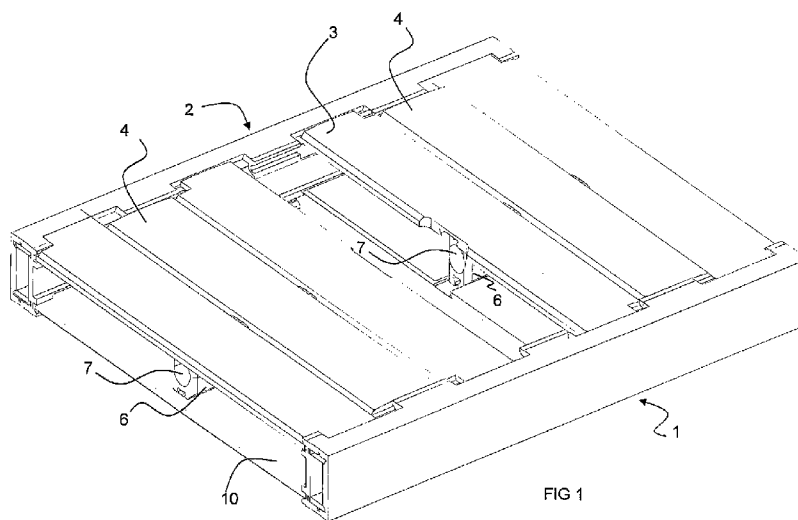


FIG 1

(57) Abstract: A pallet comprises: a plurality of side rails, each side rail including upper and lower runners; a multiplicity of boards, each board being adapted to extend between a runner of two of the rails; a spine member extending parallel to the rails, the spine member including upper and lower spine runners; each board including a spine engaging portion adapted for sliding engagement with a spine runner; and locking means adapted when locked to prevent sliding disengagement of the boards from the slide runner.

