

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
19 November 2020 (19.11.2020)



(10) International Publication Number
WO 2020/227752 A1

(51) International Patent Classification:

B65D 47/06 (2006.01) *B65D 77/28* (2006.01)
B65D 47/08 (2006.01) *B65D 43/16* (2006.01)
A47G 19/22 (2006.01)

(21) International Application Number:

PCT/AU2019/050549

(22) International Filing Date:

30 May 2019 (30.05.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2019203320 13 May 2019 (13.05.2019) AU

(71) Applicant: **B.BOX FOR KIDS DEVELOPMENTS PTY LTD** [AU/AU]; Unit 5, 677 Springvale Road, Mulgrave, Victoria 3170 (AU).

(72) Inventors: **EGOROV, Miroslav**; Unit 5, 677 Springvale Road, Mulgrave, Victoria 3170 (AU). **TJERNBERG, Lisa, Edlund**; Unit 5, 677 Springvale Road, Mulgrave, Victoria 3170 (AU). **AMATOURY, Sylvain, Jacques**; Unit 5, 677 Springvale Road, Mulgrave, Victoria 3170 (AU).

(74) Agent: **PHILLIPS ORMONDE FITZPATRICK**; Level 16, 333 Collins Street, Melbourne, Victoria 3000 (AU).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,

(54) Title: DRINK BOTTLE

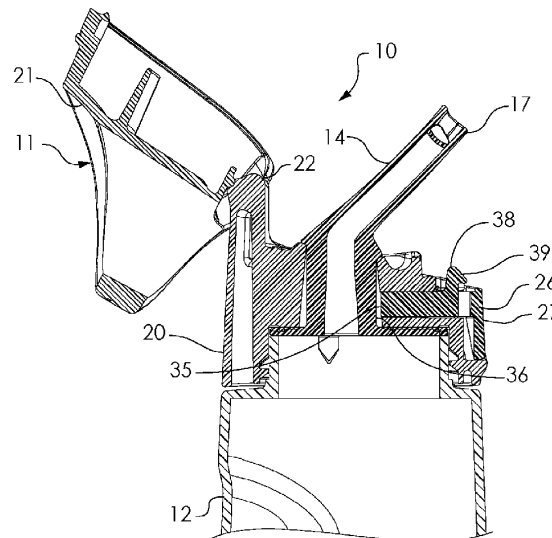


FIG. 6

(57) Abstract: A drink bottle (10) comprising a container (12) for containing a liquid and a removable lid (11). The lid (11) being removably connected to an open end of the container (12). A resiliently flexible drinking spout or straw assembly (14) being mounted in the lid (11) for extraction of liquid from within the container. An actuator (26) for actuating a function of the drink bottle (10), being slidably mounted to the lid for sliding movement between a home position and an actuation position. The actuator (26) having a push face (27) accessible from outside the lid (11) for receiving finger pressure for displacing the actuator (26) from the home position toward the actuation position for performing a function of the drink bottle (10). The actuator (26) having a bearing surface (35) in bearing engagement with the spout or straw assembly (14) such that movement of the actuator (26) from the home position towards the actuation position resiliently deforms the spout or straw assembly (14) and by the resilient deformation the actuator (26) is biased

WO 2020/227752 A1

[Continued on next page]

KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*