

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
26 November 2020 (26.11.2020)



(10) International Publication Number
WO 2020/234706 A1

(51) International Patent Classification:

F04B 39/12 (2006.01) *F04B 53/22* (2006.01)
F04B 39/14 (2006.01) *F16B 45/02* (2006.01)
F04B 53/16 (2006.01)

(21) International Application Number:

PCT/IB2020/054603

(22) International Filing Date:

15 May 2020 (15.05.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1906952.5 17 May 2019 (17.05.2019) GB

(71) Applicant: **EDWARDS VACUUM LLC** [US/US]; 6416
Inducon Drive West, Sanborn, New York 14132 (US).

(72) Inventors: **LE MON, Gregory Ryan**; Edwards Vacuum LLC, 6455 NE Jacobson Street, Hillsboro, Oregon 97124 (US). **SCHWAB, Jeffrey Robert**; Edwards Vacuum LLC, 6455 NE Jacobson Street, Hillsboro, Oregon 97124 (US). **ROMEO, Mark Kollin**; Edwards Vacuum LLC, 6455 NE Jacobson Street, Hillsboro, Oregon 97124 (US). **GOEKE, Jacob Henry**; Edwards Vacuum LLC, 6455 NE Jacobson Street, Hillsboro, Oregon 97124 (US). **GUNDLACH, Ethan Patrick**; Edwards Vacuum LLC, 6416 Inducon Drive West, Sanborn, New York 14132 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,

(54) Title: PUMP MOUNTING FRAME

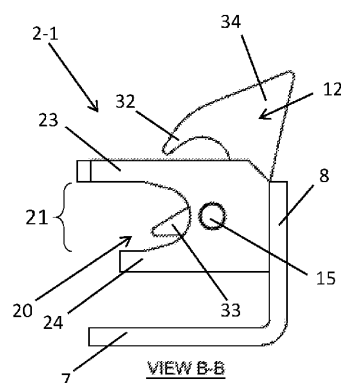


FIG. 3B

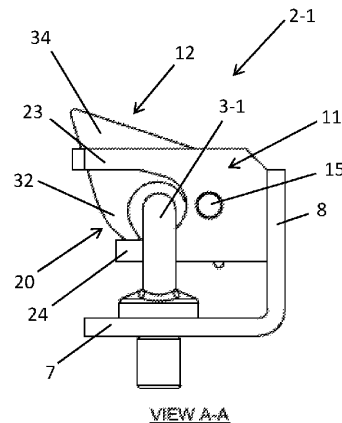


FIG. 4B

(57) Abstract: A pump mounting frame comprising a latching device (2-1) for releasably mounting a pump apparatus. The latching device has a body portion (11) having a latch aperture (20) for receiving a latch pin (3-1); and a latching member (12) for releasably retaining the latch pin in the latch aperture. The latching member is movable between a closed position and an open position. The latching member has a first arm (32) for retaining the latch pin in the latch aperture when the latching member is in the closed position. The latching member has a second arm (33) for biasing the latch pin out of the latch aperture when the latching member is displaced from the closed position to the open position. A method of moving one or more pumps using the pump mounting frame is also disclosed.

[Continued on next page]

OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE