



(51) International Patent Classification:
G01M 3/40 (2006.01)

(21) International Application Number:
PCT/US2010/059355

(22) International Filing Date:
8 December 2010 (08.12.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/290,773 29 December 2009 (29.12.2009) US

(71) Applicant (for all designated States except US):
NESTEC S.A. [CH/CH]; Avenue Nestle 55, CH-1800 Vevey (CH).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **DZIKOWICZ, Anthony Edward** [US/US]; 13332 Ravine View Drive, Grand Haven, Michigan 49417 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(74) Agent: **MURPHY, Radha**; 12 Vreeland Road, P.O. Box 697, 2nd Floor, Florham Park, New Jersey 07932 (US).

(54) Title: SEAL INTEGRITY EVALUATION DEVICE AND METHOD OF USE THEREOF

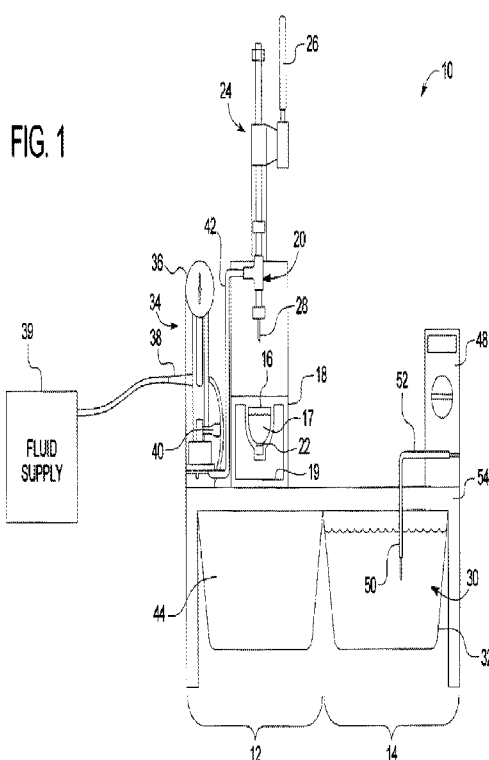

(57) Abstract: Apparatuses for evaluating the integrity of a container seal and methods of using same are provided. The apparatuses include a sealed container having a conductive fluid and a first probe therein, a conductive solution bath having a second probe therein, a conductivity meter and a pressurized fluid supply. A pressurized fluid is supplied from fluid supply to an interior of the sealed container through the first probe until the seal on sealed container ruptures, first and second probes create an electrical circuit, and the conductivity meter detects a flow of electrons between the two probes. In this manner, apparatuses of the present disclosure are able to quantify the amount of internal pressure in the container at the time the container seal ruptures.