



(51) International Patent Classification:

B65H 20/20 (2006.01) *B23P 17/04* (2006.01)
F16L 55/00 (2006.01) *F16L 35/00* (2006.01)

(21) International Application Number:

PCT/US2014/039326

(22) International Filing Date:

23 May 2014 (23.05.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/905,969 30 May 2013 (30.05.2013) US
61/975,156 4 April 2014 (04.04.2014) US

(71) Applicant: **STONEAGE, INC.** [US/US]; 466 S. Skylane Drive, Durango, Colorado 81303 (US).

(72) Inventor: **ZINK, Gerald P.**; 259 County Road 216, Durango, Colorado 81303 (US).

(74) Agents: **WAHL, John R.** et al.; Greenberg Traurig, LLP, 1200 17th Street, Suite 2400, Denver, Colorado 80202 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

— with amended claims and statement (Art. 19(1))

(54) Title: APPARATUS FOR PROPELLING A COIL CLAD HOSE

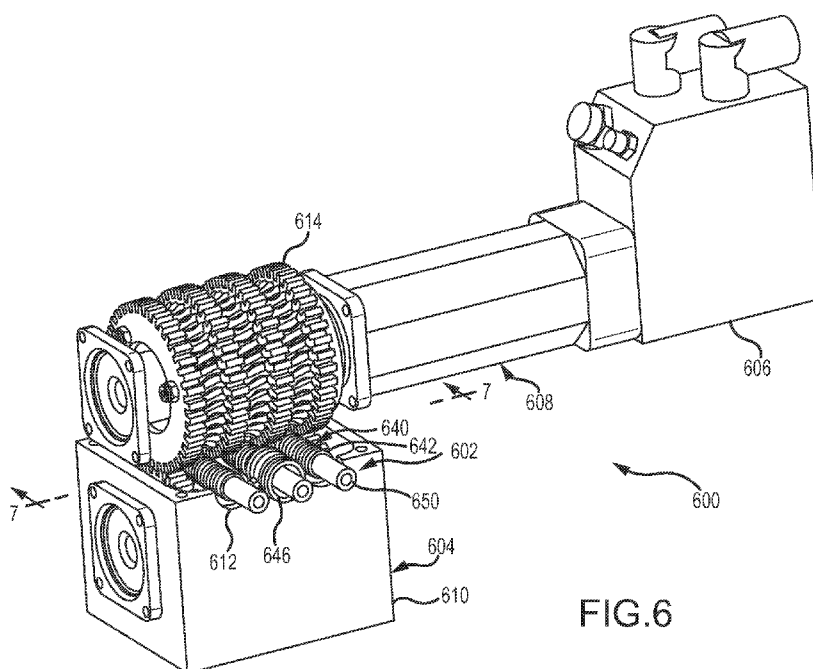


FIG. 6

(57) Abstract: An apparatus for propelling a plurality of coil clad hoses simultaneously includes a plurality of modules. Each module includes a primary driven bull gear. A follower bull gear is rotatably fastened to a follower axle extending parallel to the drive axle and the follower bull gear meshes with the primary bull gear. A plurality of secondary bull gear/sprocket modules are fastened to each of the axles, each of the modules having a secondary bull gear having teeth extending to a first outer diameter and a sprocket gear having teeth extending a distance less than the first outer diameter. The secondary bull gear teeth of modules on the drive axle mesh with corresponding secondary bull gear teeth of modules on the follower axle to define between adjacent modules an opening width for receiving and passing therebetween a coil clad portion of a high pressure hose.