



(51) International Patent Classification:

B01D 11/04 (2006.01) **B01J 19/00** (2006.01)
B01F 7/00 (2006.01)

(21) International Application Number:

PCT/EP2014/071370

(22) International Filing Date:

7 October 2014 (07.10.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13198141.7 18 December 2013 (18.12.2013) EP

(71) Applicant: **SULZER CHEMTECH AG** [CH/CH];
Sulzerallee 48, CH-8404 Winterthur (CH).(72) Inventors: **WIELAND, Fredy**; 3, rue des Cigones, F-68220 Hegenheim (FR). **KOCH, Jörg**; Im Sodacker 18, 79400 Kandern (DE). **GOUDE, Ronan**; 5b, rue des Prés, F-68220 Hagenthal le Bas (FR).(74) Agent: **MANITZ FINSTERWALD UND PARTNER**
GBR; Postfach 31 02 20, 80102 München (DE).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** STATIC INTERNAL, USE OF ONE OR MORE STATIC INTERNAL, AGITATED LIQUID-LIQUID CONTACTOR AND USE OF AN AGITATED LIQUID-LIQUID CONTACTOR

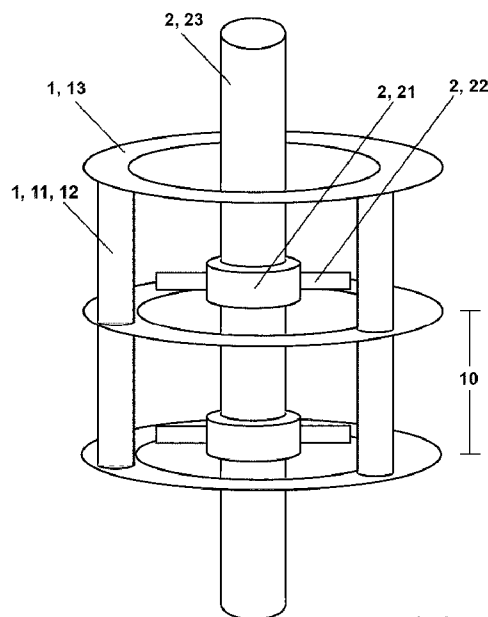


Fig. 3

(57) **Abstract:** A static internal (1) embodied so as to be suitable for improving a contact, heat transfer or mass transfer between the liquids in an agitated liquid-liquid contactor (3) lacking calming sections and having an metallic agitated internal (2). The surface energy of the static internal (1) is < 40, preferably < 30, more preferably < 25, most preferably < 20 mN/m.