



(43) International Publication Date
5 June 2014 (05.06.2014)

- (51) **International Patent Classification:**
B60N 2/28 (2006.01) *B60R 22/14* (2006.01)
- (21) **International Application Number:**
PCT/IB2013/002637
- (22) **International Filing Date:**
27 November 2013 (27.11.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
2012-261493 29 November 2012 (29.11.2012) JP
- (71) **Applicants** (*for all designated States except US*):
TOYOTA JIDOSHA KABUSHIKI KAISHA [JP/JP]; 1,
Toyota-cho, Toyota-shi, Aichi-ken, 471-8571 (JP).
TAKATA CORPORATION [JP/JP]; 12-31, Akasaka 2-
chome, Minato-ku, Tokyo, 107-8508 (JP).
- (72) **Inventors; and**
- (71) **Applicants** (*for US only*): **MITSUO, Tetsu** [JP/JP]; c/o
TOYOTA JIDOSHA KABUSHIKI KAISHA, of 1,
Toyota-cho, Toyota-shi, Aichi-Ken, 471-8571 (JP). **NAK-**
AGAWA, Osamu [JP/JP]; c/o **TAKATA CORPORA-**
TION, of 12-31, Akasaka 2-chome, Minato-ku, Tokyo,
107-8508 (JP). **SAKUMOTO, Masayuki** [JP/JP]; c/o
TAKATA CORPORATION, of 12-31, Akasaka 2-chome,
Minato-ku, Tokyo, 107-8508 (JP).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: VEHICLE CHILD SAFETY SEAT

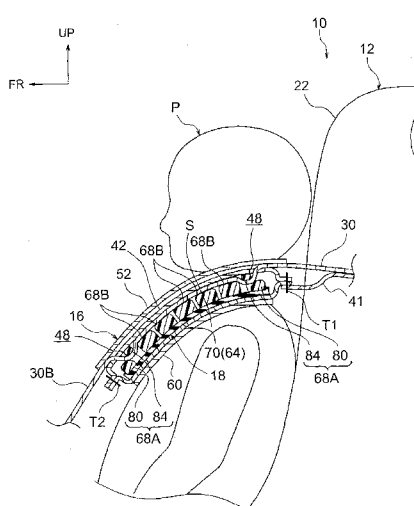


FIG. 3

(57) Abstract: A vehicle child safety seat includes: a seat main body (12) on which an occupant sits; a seat belt (14) for restraining the occupant to the seat main body (12), the seat belt (14) including a shoulder harness (30) having a belt shape and facing a shoulder of the occupant; a harness cover (16) formed in an elongated pouch shape and slidably attached to the shoulder harness (30) in a longitudinal direction such that the shoulder harness (30) is passed through paired insertion holes (48) formed on respective end portions of the harness cover (16) in the longitudinal direction; and a shoulder pad (18) formed in an elongated shape, accommodated in the harness cover (16), placed between the shoulder and the shoulder harness (30) along the longitudinal direction of the shoulder harness (30), and including paired connection portions (80; 84) provided on respective end portions of the shoulder pad (18) in the longitudinal direction so as to be connected to the shoulder harness (30) slidably in the longitudinal direction.